



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

University of Wisconsin
Library

CLASS

SSP

BOOK

P42

PURCHASED WITH THE
SCHOOL OF COMMERCE LIBRARY FUND

A GIFT FROM FRIENDS OF THE UNIVERSITY

1901



✓

REPAIRS
OF
RAILWAY CAR EQUIPMENT

WITH
PRICES OF LABOR AND MATERIAL.

A REFERENCE BOOK FOR RAILWAY OFFICIALS, WITH AVERAGE
SHOP COST OF REPAIRS TO PASSENGER
AND FREIGHT CARS.

DETAIL BILLS OF MATERIAL FOR CARS, TRUCKS, PLATFORMS, ROOFS, DOORS,
ETC.; TABLES OF WEIGHTS OF IRON AND OTHER MATERIAL;
BOARD MEASURE; SIZES AND WEIGHTS OF BOLTS,
NUTS, WASHERS, NAILS, TIN, ETC.

BY
H. M. PERRY, M. C. B.

CHICAGO:
THE RAILWAY AGE,
1899.

COPYRIGHT, 1899

H. M. PERRY.

58617
JUL 15 1901

1689673

SSP
P42

PREFACE.

After an experience of over thirty years in railway car work, and recognizing the growing necessity of a book devoted entirely to the subject of car repairs, it is the purpose of the author, in offering this work to the railway fraternity, to furnish a ready means of reference on this subject; especially for estimating the cost of repairs, making out damaged car reports, checking up bills, comparing the different methods of doing work, making out bills of material, etc.

The prices for both labor and material are based, as far as possible, on the Master Car Builders' Code of Rules governing repairs to cars, thus making them applicable to any section of the country, and damaged car reports based on these prices would not only be correct, but when made out by different employes would be approximately alike.

The useful information, such as tables, and weights of all classes of material, has been carefully compiled, and is intended to cover all the information required to answer the various problems arising in car-shop work.

H. M. P.

**AVERAGE COST OF REPAIRS
TO
STANDARD PASSENGER EQUIPMENT.**

These prices include the labor of removing old material, and the labor and material for replacing new, unless otherwise specified.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
Removing old siding, filling between studs, renewing siding and mouldings, burning off letter board and posts and finishing ready to paint, 340 hours.....			\$85 00	
Whitewood lumber	1462 feet.	\$38 00		
Ash "	300 "	9 00		
Total cost ready for paint				\$132 00
or about 25c per sq. foot.				
Repairing surfaces of 100 sq. feet or less, filling in frame, siding, and painting, estimate 60c per sq. foot.				
Removing and replacing siding but <i>not</i> filling in frame, burning off old paint and finishing car ready for paint, 100 hours			25 00	
Whitewood lumber	750 "	19 50		
Ash "	300 "	9 00		
Total cost ready for paint				53 50
or about 10c per sq. foot.				
Repairing surfaces of 100 sq. feet or less, siding and painting, estimate 45c per sq. foot.				
Painting car outside, complete, costs about 25c per sq. foot.				

REPAIRS TO PASSENGER EQUIPMENT—CONTINUED.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
Burning off old paint and finishing outside of car ready for paint, 100 hours				\$21 75
Removing and replacing belt rail.....	160 feet.	\$ 5 00	\$ 8 00	13 00
Length of car costs about 12½c per foot.				
Shorter lengths " " 25c "				
Removing and replacing letter board, crown moulding and fascia	200 "	6 00	12 50	18 50
For painting, estimate 25c per foot.				
" lettering, " 15c per letter, gold.				
Repairing short lengths — for woodwork painted and varnished, estimate 60c per foot, with 15c per letter extra for gold letters.				
Baggage and mail cars cost about the same as coaches for the same class of work.				
Tinning roof, complete, copper flashing	652 "	41 24	22 76	64 00
" " lower deck, " "	367 "	28 02	12 48	40 50
" " upper deck	285 "	13 22	9 28	23 50
Canvas roof, complete, copper flashing	73 sq. yd.			48 00
Copper flashing	60 lbs.	11 50		
Tin roof, complete, copper flashing, per sq. ft.				10
" " without " " " "				08
Canvas roof, " " " per sq. yard.				50
" " with " " " "				66

REPAIRS TO PASSENGER EQUIPMENT—CONTINUED.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
Removing "Miller" platform timbers and replacing new, using old castings and forgings, one end of car.....	340 feet.	\$18 00	\$12 00	\$30 00
Removing and replacing same platform.....	48 "	1 20		10 00
End sill, including removing and replacing platform, and siding ready for paint.....	68 "	2 00	15 00	18 20
Siding and moulding one end of car, complete..	68 "	2 00	3 00	5 00
Painting and varnishing " " "				22 00
1 door post, removed and replaced new.....	20 "	60	4 40	5 00
1 corner post, " " " "	20 "	60	4 40	5 50
1 end carline, " " " "	25 "	75	2 50	3 25
1 " corner, " " " "	6 "	18	2 50	2 63
2 " " " " " "	12 "	36	5 00	5 36
1 " arm, " " " "	16 "	50	2 50	3 00
2 " " " " " "	32 "	1 00	5 00	6 00
1 end carline and 2 corners removed and replaced new	37 "	1 10	5 00	6 10
1 end carline and 2 corners, and 2 arms removed and replaced new.	69 "	2 10	10 00	12 10
Removing and renewing hood, complete.....		10 00	20 00	30 00
Splicing roofing at end plate, lower deck.....	20 "	50	1 00	1 50
" " " " upper "	40 "	1 00	1 50	2 50
Lining underside of hood.....	33 "	1 00	2 00	3 00
Tinning hood, complete				5 00
" " lower deck.....				2 00
" " upper "				3 00
Canvas on hood, complete.....				2 50

REPAIRS TO PASSENGER EQUIPMENT—CONTINUED.

	Cost of Material.	Cost of Labor.	Total Cost.
Applying "Pullman" vestibule, including remodeling hood and platform, 1 end of car	\$485 00	\$190 00	\$675 00
Applying vestibule after the platform and hood have been remodeled, 1 end.....	290 00	110 00	400 00
Removing old platform and applying new Janney-Miller platform to receive vestibule and crediting old material, 1 end.....	160 00	40 00	200 00
Removing old hood and applying a new one to receive vestibule, 1 end	35 00	40 00	75 00
1 end door, complete, mahogany, trimmed.....			24 00
1 set of glass and trimmings for 1 door			8 00
4 vestibule doors, complete, mahogany, 1 end			48 50
1 set of glass and trimmings for 4 doors.....			27 50
1 " " " beveled for 4 doors.....			10 50
1 vestibule door, mahogany, not trimmed.....			5 25
2 vestibule posts.....			6 50
1 " dome			9 50
1 " lamp			18 00
2 " steps, curved risers, not trimmed			8 00
2 sets bronze ornaments for step risers.....			6 00
Gear brake attachment, one end of car			25 00
Body hand rails, bronze, 1 end of car.....			7 50
Platform " " 1 " "			5 00

REPAIRS TO PASSENGER EQUIPMENT—CONTINUED.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 Miller platform, complete, new material		\$63 00	\$12 00	\$75 00
1 " " new timbers, old material.....		18 50	12 00	30 50
1 end timber, 7 in. x 8 in. x 8 ft. 6 in.....	45 feet.	1 12	1 50	2 62
1 step " 2½ in. x 10 in. x 3 ft.....	7 "	18	50	68
1 inter " 4 in. x 12 in. x 14 ft.....	66 "	1 65	1 00	2 65
1 center " 4 in. x 12 in. x 14 ft.....	66 "	1 65	4 50	6 15
2 " " 4 in. x 12 in. x 14 ft.....	132 "	3 30	5 00	8 30
Renewing all timbers, one platform	340 "	8 50	10 00	18 50
1 platform timber plate, ¾ in. x 7 in. x 14 in.....	125 lbs.	3 75	25	4 00
1 platform floor, 2 ft. 6 in. x 6 ft.....	20 feet.	50	1 25	1 75
1 " step tread, 1½ in. x 9 in. x 2 ft. 6 in....	3 "	09	25	34
1 " " riser, ½ in. x 8 in. x 2 ft. 6 in....	1 "	03	15	18
1 " " side 1½ in. x 18 in. x 3 ft.....	7 "	21	50	71
1 pair steps, complete				2 50
2 platform hand rails, plain.....	43 lbs.			3 50
4 " " " pillars.....	42 "			2 00
2 body " " plain.....	13 "			1 00
1 brake mast	22 "			1 00
1 " " step.....	22 "			1 80
1 Miller hook, cast steel				12 00
1 " " spring.....	67 "			2 50
1 " " " pocket.....	43 "			1 50
1 " draw stem and key.....	14 "			50
1 " carry iron and plate	42 "			1 00
1 " uncoupling lever	25 "			1 50
1 " buffer.....	63 "			4 00
2 " safety chains, ⅞ inch				2 50

DETAIL COST OF APPLYING

"MILLER" PLATFORMS TO PASSENGER CARS.

Oak lumber, 680 feet @ \$25.00.....	\$ 17 00
Ash " 36 " @ 30.00.....	1 08
Yellow pine, 40 " @ 25.00.....	1 00
Whitewood, 78 " @ 30.00.....	2 34
	<hr/> \$ 21 42

FORGINGS.

2 Miller hooks	\$ 24 00	
2 " " yokes	3 00	
2 " " tail pins.....	2 00	
2 " " bolts	25	
4 " spring pockets.....	5 50	
2 " " yokes	60	
4 " " followers	1 50	
2 " uncoupling levers.....	3 00	
2 " " chains and clevises	1 00	
	<hr/>	40 85
2 Miller buffers	8 00	
2 " " followers.....	60	
2 " " keys	10	
2 " " face plates	60	
	<hr/>	9 30
2 brake masts and steps.....	3 00	
8 platform pillars.....	4 00	
4 " hand rails.....	7 00	
	<hr/>	14 00
2 coupling pins and chains	1 25	
4 safety chains, $\frac{7}{8}$ inch	4 50	
4 step angle irons and plates.....	1 10	
2 end sill truss rods	2 00	
	<hr/>	8 85
4 Miller hook springs	5 00	
	<hr/>	5 00
Amount carried forward		\$ 99 42

**DETAIL COST OF APPLYING
MILLER PLATFORMS TO PASSENGER CARS—CONTINUED.**

Amount brought forward \$ 99 42

CASTINGS.

2 Brake wheels	44 lbs.	\$0 66	
2 " ratchets and pawls.....	18 "	27	
2 " mast guides	5 "	07	
8 pillar washers	16 "	24	
2 buffer followers	28 "	42	
2 " bushings	10 "	15	
2 draw bar stops	68 "	1 02	
2 " " pin holders.....	6 "	09	
2 lever wedges	3 "	04	
2 " guides.....	5 "	07	
4 " pockets.....	10 "	10	
4 truss rod struts.....	12 "	18	
			3 31

SPRINGS.

2 Miller draw springs	24 lbs.	84	
2 " buffer "	24 "	84	
			1 68

MISCELLANEOUS.

Bolts and nuts.....	3 70	
Screws and nails	2 20	
Paint stock	2 30	
		8 20

LABOR.

Mill	2 50	
Car builders	20 00	
Painters	1 50	
		24 00

	136 61
Add 10 per cent	13 66
	<u>\$150 27</u>

DETAIL COST OF APPLYING

JANNEY-MILLER PLATFORMS TO PASSENGER CARS.

Oak lumber, 600 feet @ \$25.00.....	\$15 00	
Ash " 36 " @ 30.00.....	1 08	
Yellow pine, 40 " @ 25.00.....	1 00	
Whitewood, 78 " @ 30.00.....	2 34	
		\$19 42

FORGINGS.

4 draw bar spring pockets.....	8 00	
4 " " " followers.....	2 00	
2 " " front yokes, $\frac{3}{4}$ inch x 4 inches	1 50	
2 " " chafe plates, $\frac{1}{2}$ inch x $2\frac{1}{2}$ inches.....	2 00	
4 " " " ".....	50	
2 " " stop braces	50	
2 " " lever springs.....	1 00	
		15 50
8 platform pillars	4 00	
4 " hand rails.....	7 00	
2 brake masts and steps.....	3 00	
		14 00
2 buffer face plates.....	1 75	
4 safety chains, $\frac{7}{8}$ inch	4 50	
8 step angle irons and plates.....	2 25	
2 end sill truss rods	4 00	
4 draw timber straps.....	1 00	
		13 50

JANNEY-MILLER MATERIAL.

2 Miller hooks, solid, No. 106.....		
2 combination horns, " 48.....		
2 eye bolts, " 67L		
2 " " " 66.....		
		36 00
Amount carried forward		\$98 42

DETAIL COST OF APPLYING

JANNEY-MILLER PLATFORMS TO PASSENGER CARS—CONTINUED.

Amount brought forward \$ 98 42

JANNEY-MILLER MATERIAL—CONTINUED.

2 Janney couplers,	No. 1P.....	
2 " knuckles,	" 2.....	
2 " catchers,	" 3.....	
2 " catch spring bolts,	" 15.....	
2 " knuckle pins,	" 16.....	
2 " coupling pins,	" 17.....	
2 " tail pins,	" 18.....	
2 " horns,	"	
2 " " pins,	" 19.....	
2 " catch spring rings,	" 25.....	50 00
2 equalizers,	No. 6P.....	\$3 00
2 foot plates,	" 7.....	72
2 combination yokes,	" 9.....	2 44
2 " " bolts,	" 104.....	1 00
2 draft bolts,	" 11.....	2 90
2 fulcrum bolts,	" 12.....	1 70
2 long T "	" 13.....	1 10
2 short T "	" 14.....	1 50
2 platform lever pins,	" 20.....	20
2 catch levers,	" 22.....	1 28
2 center buffer springs,	" 26.....	3 00
2 draft springs,	" 28P	3 00
2 Miller buffer guides,	" 29.....	1 60
2 Janney " "	" 30.....	88
		24 32
Amount carried forward.....		\$172 74

DETAIL COST OF APPLYING

JANNEY-MILLER PLATFORMS TO PASSENGER CARS—CONTINUED.

Amount brought forward	\$172 74
------------------------------	----------

JANNEY-MILLER MATERIAL—CONTINUED.

2 center spring washers, No. 32.....	\$0 10
4 fulcrum ferrules, " 35.....	20
4 thimbles, " 37.....	10
4 buffer washers, " 38.....	20
2 draw bar stops, " 43.....	3 76
2 " " bolts, " 56.....	60
2 combination buffers, " 42.....	6 00
2 buffer yokes, " 44.....	2 86
4 side spring plates, " 45.....	1 76
4 equalizer guides, " 47.....	1 00
2 side spring bolts, " 52.....	1 00
2 pull rods, " 53.....	88
2 side spring stirrups, " 54.....	40
2 side springs, " 55.....	90
2 platform lever plates, " 57.....	10
2 " " jaws, " 58.....	50
2 ball joint washers, " 59.....	10
2 side spring " " 60.....	06
2 swivels, " 61.....	30
2 " hooks, " 62.....	50
2 side spring triggers, " 63.....	16
2 connecting pins, " 64.....	1 50
2 trap door springs, " 65.....	30
2 trap doors, " 68.....	2 20
	<hr/> 25 48
Amount carried forward	\$198 22

DETAIL COST OF APPLYING

JANNEY-MILLER PLATFORMS TO PASSENGER CARS—CONTINUED.

Amount brought forward	\$198 22
------------------------------	----------

JANNEY-MILLER MATERIAL—CONTINUED.

2 platform levers,	No. 69.....	\$4 10
2 side spring pins,	" 81.....	10
4 followers,	" 99.....	2 00
4 " guides,	" 100.....	60
2 Janney buffers, round face,	" 102.....	3 80
2 " " flat " "	" 103.....	3 60
		14 20

CASTINGS.

2 brake wheels,	44 lbs.....	66
2 " ratchets and pawls,	18 "	27
2 " mast rests,	5 "	07
8 pillar washers,	16 "	24
4 truss rod struts,	12 "	18
		1 42

MISCELLANEOUS.

Bolts and nuts.....	10 25
Screws and nails.....	2 50
Paint stock.....	2 50
	15 25

LABOR.

Mill.....	3 50
Car builders	30 00
Painters	1 50
	35 00

	264 09
Add 10 per cent.....	26 41
	\$290 50

COST OF INSIDE FINISH.

INSIDE FINISH, ONE END OF COACH.

ONE END FINISH.

Lumber, mahogany, 103 feet @ 18c.....		\$18 54
Labor, cabinet and mill.....	\$ 5 50	
“ painters and material	4 00	
		<u>9 50</u>
		28 04
Add 10 per cent.....		<u>2 80</u>
		30 84

Oak finish would cost \$15.00.

ONE END DOOR.

Lumber, mahogany, 32 feet @ 18c.....		5 75
Labor, cabinet and mill.....	5 00	
“ painters and material	3 25	
		<u>8 25</u>
1 door lock, bronze	4 00	
3 “ butts, “	1 75	
1 “ sash catch, bronze	25	
2 “ glass	2 00	
		<u>8 00</u>
		22 00
Add 10 per cent.....		<u>2 20</u>
		24 20

Oak finish would cost \$19.25.

ONE END DOOR CASING.

Lumber, mahogany, 25 feet @ 18c.....		4 50
Labor, cabinet and mill	4 00	
“ painters and material	2 00	
		<u>6 00</u>
		10 50
Add 10 per cent.....		<u>1 05</u>
		\$11 55

Oak finish would cost \$7.50.

COST OF INSIDE FINISH—CONTINUED.

ONE GENTS' SALOON, COMPLETE.

Lumber, mahogany, 98 feet @ 18c.....		\$17 64
Labor, cabinet and mill.....	\$15 75	
“ painters and material.....	5 50	
		21 25
1 door latch.....	4 50	
3 “ butts.....	1 75	
2 top glass.....	1 00	
1 porcelain hopper.....	5 00	
1 “ urinal.....	4 25	
1 “ “ pipe.....	75	
1 “ drip pan.....	2 00	
1 hopper cover.....	1 75	
1 saloon handle.....	50	
1 “ paper box.....	50	
		22 00
		60 89
Add 10 per cent.....		6 08
		66 97
Oak finish would cost \$50.00.		

ONE SECTION SIDE FINISH, 6 FEET.

Lumber, mahogany, 42 feet @ 18c.....		7 56
Labor, cabinet and mill.....	4 50	
“ painters and material.....	5 00	
		9 50
		17 06
Add 10 per cent.....		1 70
		\$18 76
Oak finish would cost \$12.50.		

COST OF INSIDE FINISH—CONTINUED.

LADIES' DRESSING ROOM WASHSTAND COMPLETE.

Marble slab complete.....	\$16 00	
Porcelain wash-bowl	1 50	
		17 50
Double acting pump, complete.....	15 00	
Trimnings.....	1 50	
		16 50
Lumber, mahogany, 30 feet @ 18c	5 40	
" white pine, 20 " @ 4c.....	80	
		6 20
Sheet lead, 15 lbs. @ 5½c	82	
" zinc, 15 " @ 5½c.....	82	
		1 64
Labor, cabinet.....	1 50	
" carpenter.....	1 25	
" painters.....	75	
		3 50

TANK.

Galvanized iron, No. 18, 74 lbs. @ 5c.....	3 70	
Solder, 4 " @ 14c.....	56	
Rivets, tinned, No. 4, ¼ " @ 36c.....	09	
		4 35
Water tank valve	2 00	
" " spider	05	
Brass spud, 1½ inches.....	72	
Galvanized union, 1½ inches.....	20	
		2 97
Labor, tanners.....		6 00
		58 66
Add 10 per cent.....		5 86
		\$64 52

COST OF INSIDE FINISH—CONTINUED.

ONE DOUBLE WASHSTAND, COMPLETE.

Marble slab and back, complete.....	\$27 00	
2 porcelain bowls	3 00	
		\$30 00
2 double acting pumps, complete.....	30 00	
Trimnings.....	3 00	
		33 00
Lumber, mahogany, 66 feet @ 18c	11 88	
“ white pine, 36 “ @ 4c	1 44	
		13 32
Sheet lead, 20 lbs. @ 5½c	1 10	
“ zinc, 22 “ @ 5½c	1 21	
		2 31
Labor, cabinet and mill.....	7 50	
“ carpenter	2 50	
“ painters and material	1 75	
		11 75

TANKS.

Galvanized iron, No. 18, 110 lbs. @ 5c.....	5 50	
Solder, 5 “ @ 14c.....	70	
Rivets, tinned, No. 4, ½ M @ 36c.....	12	
		6 32
Water tank valves, 2	4 00	
“ “ spiders, 2	10	
Brass spuds, 1½ inches, 2	1 44	
Galvanized unions, 1½ inches	20	
		5 74
Labor, tinner	7 00	
		109 44
Add 10 per cent.....		10 94
		\$120 38

COST OF INSIDE FINISH—CONTINUED.

ONE CORNER WASHSTAND, COMPLETE.

Marble slab and back, complete.....	\$14 00	
Porcelain bowl.....	1 50	
		\$15 50
Double acting pump, complete.....	15 00	
Trimnings.....	1 50	
		16 50
Lumber, mahogany, 50 feet @ 18c	9 00	
" white pine, 25 " @ 4c	1 00	
		10 00
Sheet lead, 15 lbs. @ 5½c	82	
" zinc, 15 " @ 5½c	82	
		1 64
Labor, cabinet and mill.....	3 00	
" carpenter	1 50	
" painters and material	1 00	
		5 50

TANK.

Galvanized iron, No. 18, 70 lbs. @ 5c.....	3 50	
Solder, 4 " @ 14c.....	56	
Rivets, tinned, No. 4, ¼ M @ 36c.....	09	
		4 15
Water tank valve	2 00	
" " spider	05	
Brass spud, 1½ inch.....	72	
Galvanized union, 1½ inch.....	20	
		2 97
Labor, tinnerns		6 00
		62 26
Add 10 per cent.....		6 22
		\$68 48

COST OF INSIDE FINISH—CONTINUED.

ONE HOUSE CLOSET, COMPLETE.

Wolf porcelain hopper		\$11 00
Galvanized iron, No. 18, 33 lbs. @ 5 c.....	\$1 65	
Solder, 2 " @ 14 c.....	28	
Lead pipe, $\frac{3}{8}$ -inch, 35 " @ $5\frac{1}{2}$ c.....	1 92	
Brass spud, $1\frac{1}{4}$ -inch.....	72	
		4 57
Lumber, mahogany, 50 feet @ 18c.....		9 00
Labor, cabinet and mill.....	5 80	
" carpenter.....	2 50	
" painters and material	1 75	
" tinner.....	4 25	
		14 30
		38 87
Add 10 per cent.....		3 88
		42 75

ONE WATER COOLER.

Galvanized iron, No. 18, 22 lbs. @ 5c.....	1 10	
Solder, $\frac{1}{2}$ " @ 14c.....	07	
Rivets, tinned, No. 4, $\frac{1}{2}$ M @ 36c.....	06	
		1 23
Water cooler faucet	1 27	
" " valve.....	1 12	
" " ears.....	03	
		2 42
Labor, tinner.....	1 60	
" painters and material.....	1 25	
		2 85
		6 50
Add 10 per cent.....		65
		\$ 7 15

COST OF INSIDE FINISH—CONTINUED.

ONE LADIES' SALOON, COMPLETE.

Lumber, mahogany, 135 feet @ 18c.....	\$24 30	
“ white pine, 25 “ @ 4c.....	1 00	
		\$25 30
Labor, cabinet and mill.....	20 00	
“ painters and material.....	5 50	
		25 50
1 door latch, bronze.....	4 50	
3 “ butts, “	1 75	
2 top glass.....	1 00	
1 porcelain hopper	5 00	
1 hopper top and front, mahogany.....	3 00	
1 paper box.....	50	
		15 75
1 marble top washstand, complete	64 52	
1 mirror and frame, complete.....	6 50	
		137 57
Add 10 per cent.....		13 75
		\$151 32

Oak finish would cost \$130.00.

ONE SET (34) DECK SASH, COMPLETE.

Lumber, mahogany, 62 feet @ 18c.....		\$11 16
Glass, 136 lights @ 7c, 6 inches x 7 inches glass.....	9 52	
Trimmings, Hart's ratchets.....	10 20	
Varnish	1 00	
		20 72
Labor cabinet and mill.....	3 50	
“ painters.....	2 50	
		6 00
		37 88
Add 10 per cent.....		3 78
		\$ 41 66

Deck sash, each, complete, \$1.25.

COST OF INSIDE FINISH—CONTINUED.

ONE SET (34) DOUBLE SASH, COMPLETE.

BOTTOM SASH.

Lumber, mahogany, 90 feet @ 18c.....		\$16 20
Glass, 24 inches x 24 inches, 34 lights @ 44c.....	\$14 96	
Trimnings, bronze.....	15 82	
Varnish.....	2 50	
		33 28
Labor, cabinet and mill.....	3 75	
“ painters.....	5 00	
		8 75
		58 23
Add 10 per cent.....		5 82
		64 05
Bottom sash, each, complete, mahogany	1 90	
“ “ “ “ cherry.....	1 60	

TOP SASH.

Lumber, mahogany, 50 feet @ 18c.....		9 00
Glass, 10 inches x 24 inches, 34 lights @ 15c.....	5 10	
Varnish	2 00	
		7 10
Labor, cabinet and mill	3 04	
“ painters	2 50	
		5 54
		21 64
Add 10 per cent.....		2 16
		\$23 80
Top sash, each, complete, mahogany.....	70	
“ “ “ “ cherry.....	50	
Sash, per window, complete, mahogany	2 60	
“ “ “ “ cherry.....	2 10	

COST OF INSIDE FINISH—CONTINUED.

ONE SET (34) DOUBLE BLINDS, COMPLETE.

Lumber, basswood, 350 feet @ 2 ¹ / ₂ c.....		\$ 8 75
Trimnings, bronze	\$ 8 00	
Varnish	3 20	
		11 20
Labor, cabinet and mill.....	6 80	
" painters	7 00	
		13 80
		33 75
Add 10 per cent.....	3 37	
		37 12
Double blinds, per window, complete.....	1 10	

ONE SET (34) SASH CURTAINS.

Curtain fixtures	34 00	
Tin rollers, 1 inch	6 80	
		40 80
Curtain material.....	36 50	
" trimmings	14 50	
		51 00
Labor, upholsterers		14 20
		106 00
Add 10 per cent..		10 60
		\$116 60
Curtains, each, complete, per window.....	\$3 43	

COST OF INSIDE FINISH—CONTINUED.

ONE FIRST-CLASS COACH SEAT, CUSHION AND BACK.

CUSHION.

Maroon plush, 1½ yards @ \$1.93	\$3 38	
Duck, 8 oz. ½ " @ .19	10	
Burlaps, ¾ " @ .05½	04	
Sheeting, ¾ " @ .12	09	
Grey Hair 1½ lbs. @ .35	44	
Tow, 4 " @ .01½	06	
Twine, 2 ounces @ .48	06	
Tacks, 4 oz. 4 " @ .28	07	
Seat springs, H. & K., 17½ inches x 21 inches, 6.....	1 26	
		\$5 50
Labor, upholsterers.....		60
		6 10
Add 10 per cent.....		61
		6 71

SEAT BACK.

Maroon plush, 1½ yards @ \$1.93	3 38	
Old gold " 1½ " @ 1.93	3 38	
Duck, 8 oz. ¾ " @ .19	13	
Burlaps, ¾ " @ .05½	04	
Sheeting, ¾ " @ .12	11	
Grey hair, 3½ lbs. @ .35	1 23	
Tow, ¾ " @ .01½	01	
Cotton batting, 1 roll.....	11	
Twine, 1 ounce... ..	03	
Tacks, 2½ "	07	
Springs and slats, H. & K.....	84	
		9 33
Labor, upholsterers		75
		10 08
Add 10 per cent.....		1 00
		\$11 08

COST OF INSIDE FINISH—CONTINUED.

ONE FIRST-CLASS COACH SEAT, CUSHION AND BACK.

SEAT FRAME.

Lumber, mahogany, 10 feet @ 16 ² c.....	\$1 62	
“ ash, 19 “ @ 2 ¹ c.....	47	
		\$2 09
Seat arms, 1 pair.....	36	
“ pivots, 1 “.....	12	
“ washers 1 “.....	06	
“ locks, 1 “.....	40	
“ lock stops, 1 “.....	48	
“ stands, 1 “.....	20	
“ foot rests, 1 “.....	24	
		1 86
Labor, cabinet and mill.....	2 05	
“ painters and material.....	70	
		2 75
		6 70
Add 10 per cent.....		67
		7 37
One seat frame, complete.....	7 37	
“ “ cushion “.....	6 71	
“ “ back “.....	11 08	
		25 16

ONE RATTAN SEAT, CUSHION AND BACK.

Lumber, ash, 11 feet @ 2 ¹ c.....		27
Seat arms, 1 pair.....	36	
“ pivots and washers, 1 “.....	18	
“ stops, 1 “.....	48	
“ stand, 1 “.....	20	
“ foot rests, 2 “.....	24	
		1 46
Cushion, H. & K. rattan.....	5 60	
Back, “ “.....	9 50	
		15 10
Labor, cabinet and mill.....	2 30	
“ painters and material.....	25	
		2 55
		\$19 38

COST OF INSIDE FINISH—CONTINUED.

OAK HEAD LINING.

Oak veneers,	676 feet @ 2 c.....	\$13 52	
“ “	676 “ @ 1½c.....	8 46	
Whitewood veneers,	872 “ @ 1½c.....	15 27	
Mouldings,	70 “ @ 4 c.....	2 80	
			\$40 05
Glue.....			7 20
Paint material			4 00
Labor, cabinet, 5c per square foot, 470 feet		23 50	
“ painters.....		15 00	
“ ornamenting, \$50.00 to \$100.00.....		75 00	
			113 50
			164 75
Add 10 per cent.....			16 47
			181 22
Oak head lining, ready to ornament, 22c per square foot.....	103 40		
Putting up head lining, complete.....	8 00		

TRIMMERS' LABOR INSIDE OF COACH.

Stripping one set of sash.....	2 hours	50	
“ “ “ blinds.....	3 “	75	
“ “ “ seats.....	5 “	1 25	
“ body of car.....	22 “	5 50	
			8 00
Trimming one set of sash and blinds.....	6 hours	1 50	
“ “ “ seats.....	8 “	2 00	
			3 50
Putting in one set of sash and blinds.....	8 hours	2 00	
“ “ “ “ seats.....	12 “	3 00	
			5 00
Trimming car, complete, sash, blinds and seats.....			\$10 00

PAINTERS' LABOR, INSIDE OF COACH.

52 FOOT CAR, 34 DOUBLE SASH.

Washing one set of sash.....	4 hours	\$ 0 60
“ “ “ blinds.....	4 “	60
“ “ “ seat frames.....	4 “	60
“ head lining.....	4 “	60
“ inside finish of car.....	8 “	1 20
Filling one set of sash.....	3 hours	75
“ “ “ seat frames.....	10 “	2 50
“ inside finish of car.....	17 “	4 25
Sand papering one set of sash.....	2 hours	50
“ “ “ “ seat frames.....	3 “	75
“ “ inside finish of car.....	10 “	2 50
Varnishing one set of sash, 3 coats.....	4 hours	1 00
“ “ “ blinds, 3 “.....	10 “	2 50
“ “ “ seat frames, 3 “.....	4 “	1 00
“ head lining, 1 “.....	4 “	1 00
“ inside finish of car, 3 “.....	58 “	14 50
Rubbing varnish on one set of sash.....	4 hours	1 00
“ “ “ “ “ blinds.....	15 “	3 75
“ “ “ “ “ seat frames.....	10 “	2 50
“ “ “ head lining.....	20 “	5 00
“ “ “ inside finish of car.....	26 “	6 50

CARPENTER WORK.

Scraping one set of sash and seat frames.....	40 hours	\$10 00
“ inside finish of car.....	80 “	20 00
Sand papering work, complete.....	20 “	5 00

SCRAPING AND VARNISHING INSIDE OF COACH.

SASH, BLINDS AND SEATS AND WASHING AND VARNISHING HEAD LINING.

MATERIAL.

Sand paper.....	6 quires	\$ 1 00	
Cornstarch filler.....	10 lbs.	1 00	
Varnish.....	12 gals.	36 00	
			\$38 00

LABOR.

Stripping car inside.....	32 hours	8 00	
Scraping " ".....	80 "	20 00	
" sash and seat frames.....	40 "	10 00	
Sand papering work, complete.....	20 "	5 00	
			43 00
Filling work, complete.....	30 hours	7 50	
Varnishing work, complete, 3 coats.....	76 "	19 00	
			26 50
Washing head lining.....	4 hours	60	
Varnishing head lining, 1 coat.....	4 "	1 00	
			1 60
Rubbing varnish.....	75 hours		18 75
Trimming car inside, complete.....	40 hours		10 00
			137 85
Add 10 per cent.....			13 78
			151 63

WASHING AND VARNISHING CAR, COMPLETE.

Material inside, complete.....		24 50	
Labor " ".....		34 10	
			58 60
Material outside, complete.....		19 25	
Labor " ".....		12 45	
			31 70
			90 30
Add 10 per cent.....			9 03
			\$99 33

WASHING AND VARNISHING COACH, COMPLETE.

WASHING AND VARNISHING OUTSIDE.

MATERIAL.

Soft soap	1 pail	\$ 0 25	
Pumice stone	5 lbs.	25	
Body color	1 "	25	
Trucks and platform color	2 gals.	2 50	
Varnish	4 "	16 00	
			\$19 25

LABOR.

Washing car outside	40 hours	6 00	
Touching up color	5 "	1 25	
Varnishing, 2 coats	16 "	4 00	
Painting trucks and platforms	6 "	1 20	
			12 45

Add 10 per cent..... 3 17

\$34 87

WASHING AND VARNISHING INSIDE, SASH, BLINDS, SEATS AND HEAD LINING.

MATERIAL.

Soft soap	1 pail	\$ 0 25	
Pumice stone	5 lbs.	25	
Varnish	8 gals.	24 00	
			24 50

LABOR.

Stripping car inside	32 hours	\$ 8 00	
Washing " "	24 "	3 60	
Varnishing car inside	50 "	12 50	
Trimming " "	40 "	10 00	
			34 10

Add 10 per cent..... 5 86

\$64 46

PAINTING COACH OUTSIDE, COMPLETE.

MURPHY'S A B C SYSTEM.

MATERIAL.

Surfacer A and B.....	2½ gals.	\$ 6 74
Putty.....	5 lbs.	45
Surfacer C.....	3½ gals.	10 13
Stain coat.....	1 "	1 00
Body color.....	10 lbs.	2 50
Drop black.....	2 "	50
Gold leaf.....	32 books	11 20
Turpentine.....	1 gal.	40
Raw oil.....	2 "	1 20
Varnish.....	6 "	24 00
Roof color.....	1½ "	1 00
Truck and platform color.....	2 "	2 50
Sand paper.....	2 quires	32
Pumice stone.....	6 lbs.	36
		<hr/> \$62 30

LABOR.

Priming A and B coats.....	10 hours	2 50
Puttying.....	15 "	3 75
Surfacer C, 3 coats.....	15 "	3 75
Stain coat.....	3 "	75
Rubbing surfacer.....	100 "	15 00
Body color, 2 coats.....	12 "	3 00
Lettering and striping.....	45 "	13 50
Varnishing, 3 coats.....	26 "	6 50
Painting deck and screens.....	4 "	80
" trucks and platforms.....	6 "	1 20
" roof.....	3 "	60
		<hr/> 51 35
		113 65
Add 10 per cent.....		11 36
		<hr/> \$125 01

23²c per square foot.

PAINTING COACH OUTSIDE, COMPLETE.

LEAD AND ROUGH STUFF SYSTEM.

MATERIAL.

Priming, lead color.....	40 lbs.	\$ 3 20	
Putty.....	5 "	45	
Rough stuff.....	6 gals.	7 50	
Stain coat.....	1 "	1 00	
Body color.....	10 lbs.	2 50	
Drop black.....	2 "	50	
Gold leaf.....	32 books	11 20	
Turpentine.....	1 gal.	40	
Raw oil.....	2 "	1 20	
Varnish.....	6 "	24 00	
Roof color.....	1½ "	1 00	
Truck and platform color.....	2 "	2 50	
Sand paper.....	2 quires	32	
Pumice stone.....	6 lbs.	36	
			\$56 13

LABOR.

Priming, 2 coats.....	10 hours	\$2 50	
Puttying.....	15 "	3 75	
Rough stuff, 3 coats.....	15 "	3 75	
Stain coat.....	3 "	75	
Rubbing surfacer.....	100 "	15 00	
Body color, 2 coats.....	12 "	3 00	
Lettering and striping.....	45 "	13 50	
Varnishing, 3 coats.....	26 "	6 50	
Painting deck and screens.....	4 "	80	
" trucks and platforms.....	6 "	1 20	
" roof.....	3 "	60	
			51 35
			107 48
Add 10 per cent.....			10 74
			\$118 22

25¢c per square foot.

PAINTING COACH OUTSIDE, COMPLETE.
SHERWIN & WILLIAMS' 10-DAY SYSTEM.
MATERIAL.

Priming, T and D.....	3	gals.	\$11 28
Putty.....	5	lbs.	45
Surfacer S.....	1½	gals.	5 64
Body color.....	10	lbs.	2 50
Drop black.....	2	"	50
Gold leaf.....	32	books	11 20
Turpentine.....	1	gal.	40
Raw oil.....	2	"	1 20
Varnish.....	6	"	24 00
Roof color.....	1½	"	1 00
Truck and platform color.....	2	"	2 50
Sand paper.....	6	quires	1 00
			<hr/> \$61 67

LABOR.

Priming, T and D coats.....	10	hours	\$2 50
Puttying.....	15	"	3 75
Surfacer S, 1 coat.....	5	"	1 25
Sandpapering surface.....	64	"	9 60
Body color, 2 coats.....	12	"	3 00
Lettering and striping.....	45	"	13 50
Varnishing, 3 coats.....	26	"	6 50
Painting deck and screens.....	4	"	80
" trucks and platforms.....	6	"	1 20
" roof.....	3	"	60
			<hr/> 42 70
			<hr/> 104 37
Add 10 per cent.....			10 43
			<hr/> \$114 80

21¢c per square foot.

PAINTING COACH OUTSIDE, COMPLETE.

LEAD AND SCRAPING FILLER SYSTEM.

MATERIAL.

Priming, lead color	40 lbs.	\$ 3 20
Putty.....	5	45
Scraping filler.....	$\frac{1}{2}$ gal.	75
Body color.....	10 lbs.	2 50
Drop black	2 "	50
Gold leaf.....	32 books	11 20
Turpentine.....	1 gal.	40
Raw oil.....	2 "	1 20
Varnish	6 "	24 00
Roof color	$1\frac{1}{2}$ "	1 00
Truck and platform color.....	2 "	2 50
Sand paper.....	4 quires	64
		<hr/> \$48 34

LABOR.

Priming, 2 coats.....	10 hours	\$2 50
Puttying.....	15 "	3 75
Surface color, 1 coat.....	5 "	1 25
Sandpapering.....	10 "	1 50
Scraping filler.....	24 "	6 00
Sandpapering filler.....	30 "	4 50
Body color, 2 coats.....	12 "	3 00
Lettering and striping	45 "	13 50
Varnishing, 3 coats.....	26 "	6 50
Painting deck and screens.....	4 "	80
" trucks and platforms.....	6 "	1 20
" roof.....	3 "	60
		<hr/> 45 10
		<hr/> 93 44
Add 10 per cent.....		9 34
		<hr/> \$102 78

19^c per square foot.

PAINTING COACH OUTSIDE, COMPLETE.

WASHING OUTSIDE AND PAINTING OVER OLD PAINT.

MATERIAL.

Soft soap	1 pail	\$ 0 25
Pumice stone	8 lbs.	40
White lead	20 "	1 60
Putty	5 "	45
Body color	10 "	2 50
Drop black	2 "	50
Gold leaf	32 books	11 20
Turpentine	1 gal.	40
Raw oil	2 "	1 20
Varnish	6 "	24 00
Roof color	1½ "	1 00
Sand paper	4 quires	64
Truck and platform color	2 gals.	2 50
		<hr/>
		\$46 64

LABOR.

Washing car.....	40 hours	6 00
Sandpapering.....	20 "	3 00
Lead color, 1 coat.....	5 "	1 25
Puttying	15 "	3 75
Sandpapering	20 "	3 00
Body color, 2 coats.....	10 "	2 50
Lettering and striping.....	45 "	13 50
Varnishing, 3 coats	26 "	6 50
Painting deck and screens.....	4 "	80
" trucks and platforms	6 "	1 20
" roof	3 "	60
		<hr/>
		42 10
		<hr/>
		88 74
Add 10 per cent		8 87
		<hr/>
		\$97 61

18½c per square foot.

**COMPARATIVE COST OF
DIFFERENT SYSTEMS OF PAINTING COACHES, OUTSIDE.**

MURPHY'S A B C SYSTEM.

Material required, complete	\$62 30	
Labor " "	51 35	
		\$113 65
Add 10 per cent.....		11 36
23 ¹ / ₂ c per square foot.		125 01

LEAD AND ROUGH STUFF SYSTEM.

Material required, complete	56 13	
Labor " "	51 35	
		107 48
Add 10 per cent.....		10 74
22 ¹ / ₂ c per square foot.		118 22

SHERWIN & WILLIAMS' 10-DAY SYSTEM.

Material required, complete	61 67	
Labor " "	42 70	
		104 37
Add 10 per cent.....		10 43
21 ¹ / ₂ c per square foot.		114 80

LEAD AND SCRAPING FILLER SYSTEM.

Material required, complete	43 34	
Labor " "	45 10	
		93 44
Add 10 per cent.....		9 34
19 ¹ / ₂ c per square foot.		102 78

PAINTING OVER OLD PAINT.

Material required, complete	46 64	
Labor " "	42 10	
		88 74
Add 10 per cent..		8 87
18 ¹ / ₂ c per square foot.		97 61

NOTE.—For burning off old paint, 65 hours 13 00
 Sandpapering, ready to paint, 35 hours 8 75

Add to above prices..... \$21 75

CAR HEATING.

HOT WATER SYSTEM.

One of the greatest improvements in car heating over the old system of direct radiation from wood or coal stoves, was the introduction of hot water heaters, such as the Baker, Searles, Johnson, etc., all depending on the same original principle, the circulation of hot water through a closed system of circulating pipes.

The circulation of the water in these pipes is caused by the difference in the weight of the water in the up and down pipes from the drum, due partially to the difference of temperature, and principally to the fact that steam bubbles form in the coil and the up pipe from the heater, thus displacing about one-half the volume of water in this pipe.

If the fire in the heater is forced to a point where steam is generated in the drum, sufficient to exert a pressure, the circulation in the pipes is retarded or wholly stopped, until this pressure is removed, as the pressure in the drum acts equally on both the up and down pipes until an equilibrium is established, after which an explosion is liable to occur.

Where a car requires over five hundred feet of circulating pipe, a multiple system should be applied, as the weight of water in the down pipe is not sufficient to overcome the friction in the circulating pipes and fittings.

CAR HEATING—CONTINUED.

HOT WATER SYSTEM.

In this case two coils are placed in the heater and two drums and sets of pipe used, each side of the car being independent; in another system a special fitting is placed below the drum, from which two or four down pipes lead to the different parts of the car, and the return pipes all leading to a special fitting below the coil.

STEAM HEATING.

All of the different systems of indirect steam heating depend on the hot water pipes to distribute the heat. In these systems a drum is placed at some point where the water in the circulating pipes passes through it, causing the water to become heated and circulate the same as in the hot water system.

In the direct system of steam heating a line of pipe is placed alongside of the car, with branches under the seats, and direct steam admitted from the train pipe; this is the simplest and most satisfactory system, as well as the cheapest, for general service.

Average steam heaters, whether direct or indirect, condense about 64 pounds of water per car per hour.

Average amount of water evaporated per pound of coal, 8 pounds.

CAR HEATING—CONTINUED.

WROUGHT IRON PIPE.

DIAMETER.		External Circumferences.	LENGTH OF PIPE.		Nominal Weight per Foot.
Internal.	External.		Per Sq. Foot of Surface.	Containing 1 Cubic Foot.	
Inches.	Inches.	Inches.	Feet.	Feet.	Pounds.
1	1.315	4.131	2.904	166.9	1.668
1½	1.66	5.215	2.301	96.25	2.244
1½	1.9	5.969	2.01	70.66	2.678
2	2.375	7.461	1.608	42.91	3.609

Temperature of steam under pressure:

1 pound pressure = 212° 40 pounds pressure = 287°
 10 " " = 239° 60 " " = 307°

Weight of one foot of water in 1½ inch pipe:

32° = .6470 pounds. 250° = .6102 pounds.
 200° = .6230 " 300° = .5974 "

By making bends in water pipes five times the diameter of pipe, it reduces the friction to 0.

Reaming the inside ends of pipes, at joints, reduces the friction 33 per cent.

Figure one square foot of heating surface to 25 cubic feet of space for car heating.

Water is the best medium to store heat, where steam = 1, iron pipe = 86, water = 231.

Expansion of air is directly proportional to the difference in temperature.

459° below zero is estimated as absolute basis.

CAR HEATING—CONTINUED.

COST OF BAKER HEATER.

Castings, 275 pounds.....	\$5 50	
Casings, inside.....	3 00	
“ outside.....	3 75	
Smoke top.....	1 85	
Hood.....	95	
Expansion drum.....	6 50	
Coil.....	5 00	
Pipes to drum.....	1 40	
Safety valve.....	1 40	
Combination cock.....	1 90	
Drum stands and cover.....	50	
		\$31 75
Labor fitting up stove.....		4 00
Heater pipe and fittings, 350 feet, 1½ inches.....	55 25	
Labor piping car.....	20 00	
		75 25
		111 00

STEAM HEATING EQUIPMENT.

Train pipe and fittings, 60 feet, 1½ inches.....	12 00	
“ “ covering, asbestos.....	13 00	
Steam hose and coupling.....	8 00	
		33 00
Labor on train pipe.....		4 50
		37 50
Steam heating equipment, indirect system, without piping, costs per car.....		125 00

PINTSCH LIGHT EQUIPMENT.

Consisting of 1 receiver, 1 regulator, stop cocks and piping for car complete.....	155 00	
4 center lamps, No. 196, \$30.00.....	120 00	
1 receiver (extra).....	75 00	
		\$350 00
1 regulator, No. 244.....	\$45 00	
Average cost of Pintsch light per car per hour.....		05

REPAIRS TO TRUCKS.

REMOVING OLD AND APPLYING NEW MATERIAL.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 wheel piece.....	40 feet.	\$ 1 00	\$ 2 50	\$ 3 50
2 " "	80 "	2 00	5 00	7 00
1 end sill.....	22 "	55	1 25	1 80
2 " "	44 "	1 10	2 50	3 60
1 cross timber.....	31 "	75	2 25	3 00
2 " "	62 "	1 50	3 00	4 50
1 bolster	80 "	2 00	1 25	3 25
1 spring plank	42 "	1 05	1 50	2 55
Renewing all timbers, one 4-wheel truck.....	392 "	9 80	10 00	19 80
" " " " 6 " "	510 "	12 75	17 25	30 00
1 center plate.....	62 lbs.	1 00	25	1 25
1 side bearing.....	18 "	30	10	40
1 pedestal	160 "	2 50	50	3 00
1 oil box	90 "	2 50	25	2 75
1 brake shoe.....	20 "	30		30
1 bolster hanger.....	18 "	70	25	95
1 " " top pin.....	3 "	10	10	20
1 " " bottom pin.....	39 "	1 10	50	1 60
Renewing 4 hangers and pins, credit scrap.....	162 "	4 20	2 50	6 70
Repairing 4 hangers, plugging holes, new pins.	84 "	2 00	4 00	6 00
Above prices do not include jacking up car.				
Changing one pair of wheels, labor.....				2 00
" " " and turning tires.				7 00
Estimate wear on steel tires \$2.00 per $\frac{1}{8}$ inch...				

STANDARD BRAKE RIGGING.

PASSENGER EQUIPMENT WITH 10-INCH CYLINDERS AND 4-WHEEL TRUCKS.

2 cylinder levers,	1	inch x 4 inches	53 lbs.
2 floating "	1	" x 3 $\frac{1}{2}$ "	58 "
2 lever guides	$\frac{1}{2}$	" x 1 $\frac{1}{2}$ "	23 "
2 carry irons and links,	$\frac{5}{8}$	" x 2 $\frac{1}{2}$ "	25 "
1 cylinder rod	1	"	21 "
6 main rods,	$\frac{3}{4}$	"	188 "
2 stops for rods,	$\frac{3}{4}$	" x 4 inches	17 "
2 hangers for rods,	$\frac{3}{4}$	"	2 "
9 " for air pipe,	$\frac{1}{4}$	" x 1 $\frac{1}{2}$ inches	20 "
14 connection pins,	1 $\frac{1}{8}$	"	17 "
2 live levers,	1	inch x 4 inches	60 "
2 dead "	1	" x 4 "	60 "
2 " " guides,	$\frac{5}{8}$	" x 2 $\frac{1}{2}$ "	55 "
2 live " "	$\frac{5}{8}$	" x 2 "	32 "
2 bottom rods,	1	"	82 "
10 connection pins,	1 $\frac{1}{8}$	"	12 "
8 brake hangers,	$\frac{7}{8}$	inch	40 "
8 " safety hangers,	$\frac{1}{4}$	" x 2 inches	52 "
8 " springs,	$\frac{3}{8}$	" x 3 "	84 "
4 " balance springs,	$\frac{3}{8}$	" x 3 "	20 "
8 " shoe keys,	$\frac{1}{8}$	" x 1 "	10 "
8 brake hanger castings			44 "
8 " shoes			160 "
4 dead lever brackets			20 "
4 " " guide washers			10 "
4 brake beams, National hollow			\$17 00

STANDARD BRAKE RIGGING.

PASSENGER EQUIPMENT WITH 14-INCH CYLINDERS AND 6-WHEEL TRUCKS.

2 cylinder levers,	1 inch x 6½ inches x 3 feet 5 inches....	93 lbs.
2 floating "	1 " x 4½ " x 3 " 11 "	82 "
2 intermediate levers,	1 " x 4½ " x 2 " 9 "	61 "
4 lever fulcrums,	¾ " x 6 " x 3 " 6 "	379 "
2 lever guides	½ " x 2 "	107 "
1 cylinder connection,	1½ " x 3 feet 5 inches	29 "
4 floating lever "	1½ " x 1 " 11 "	35 "
6 main rods,	¾ "	214 "
22 connection pins,	1½ "	28 "
2 live levers,	1 inch x 6 inches	79 "
2 balance levers,	1 " x 4½ inches	17 "
2 crescent fulcrums,	1 " x 4 "	138 "
4 bottom connections,	1½ "	85 "
28 connection pins,	1½ "	37 "
12 brake hangers,	1 inch	74 "
12 " " bolts,	1 "	25 "
4 " beam hangers,	¾ " x 3 inches	39 "
12 " " safety hangers,	¼ " x 3 "	139 "
6 " " fulcrums,	¾ " x 2½ "	100 "
4 " " safety straps,	1 "	16 "
18 " springs,	¾ " x 3 inches	120 "
4 " balance spring stays,	1 "	16 "
8 " shoe keys,	½ " x 1 inch	10 "
8 brake hanger castings		130 "
12 " shoes		300 "
6 brake beams, National hollow		\$25 50

WESTINGHOUSE PASSENGER CAR BRAKE EQUIPMENT.

REPAIR PRICES FOR STANDARD 10-INCH CYLINDER, SCHEDULE C 1.

Equipment for car complete, schedule C 1.....		\$100 00
10-inch cylinder and triple valve, complete, plate F 28, No. 1.....		16 50
Cylinder body, " " 28, " 2.....		4 75
Piston head and rod, " " 28, " 3.....		2 15
Back head, " " 28, " 4.....		1 75
Front " " " 28, " 5.....		3 00
Cross " " " 28, " 6.....		35
Packing leather, " " 28, " 9.....		80
Release spring, " " 28, " 12.....		1 00
Reservoir, 12 inches x 33 inches, plate F 23, No. 4.....		8 00
Triple valve, complete, plate F 27, No. 1.....		15 00
" " body, " " 27, " 2.....		5 50
Slide valve for triple valve, " " 27, " 3.....		1 00
Piston " " " " 27, " 4.....		2 00
Drain cup " " " " 27, " 19.....		75
Hose and coupling complete, 1 inch, each, plate F 32, No. 1.....		2 12
Coupling for 1 inch hose, " " " 32, " 2.....		75
Hose, standard 1 inch, " " " 32, " 3.....		1 00
Angle cock, 1 inch x 1½ inches, " " " 32, " 7.....		2 00
" " body, " " 32, " 7.....		1 10
" " key, " " 32, " 7.....		50
Cutout cock, plate F 32, No. 8.....		1 50
Conductor's valve, " " 32, " 9.....		2 25
Reservoir drain cup, " " 32, " 10.....		1 25
Air signal complete, schedule K		10 00

WESTINGHOUSE PASSENGER CAR BRAKE EQUIPMENT.

REPAIR PRICES FOR STANDARD 12-INCH AND 14-INCH CYLINDERS.

STANDARD 12-INCH CYLINDER.

Equipment for car complete, schedule R.....		\$110 00
12-inch cylinder and triple valve, complete, plate F 30, No. 1.....		22 00
Cylinder body,	" " 30, " 2.....	8 00
Piston and rod,	" " 30, " 3.....	3 50
Back head,	" " 30, " 4.....	2 00
Front "	" " 30, " 5.....	4 00
Cross "	" " 30, " 6.....	50
Packing leather,	" " 30, " 9.....	1 00
Release spring,	" " 30, " 12.....	1 25
Reservoir, 14 inches x 33 inches,	plate F 23, No. 3.....	10 50


STANDARD 14-INCH CYLINDER.

Equipment for car complete, schedule P.....		120 00
14-inch cylinder and triple valve, complete, plate F 31, No. 1.....		28 00
Cylinder body,	" " 31, " 2.....	8 50
Piston and rod,	" " 31, " 3.....	3 65
Back head,	" " 31, " 4.....	3 00
Front "	" " 31, " 5.....	4 00
Cross "	" " 31, " 6.....	50
Packing leather,	" " 31, " 9.....	2 00
Release spring,	" " 31, " 12.....	2 50
Reservoir, 16 inches x 33 inches,	plate F 23, No. 2.....	13 00

Triple valve, hose, cocks, etc., for 12-inch x 14-inch cylinders same prices as given for 10-inch cylinder.

CAR BRAKE LEVERS.

FROM "WESTINGHOUSE" INSTRUCTION BOOK.

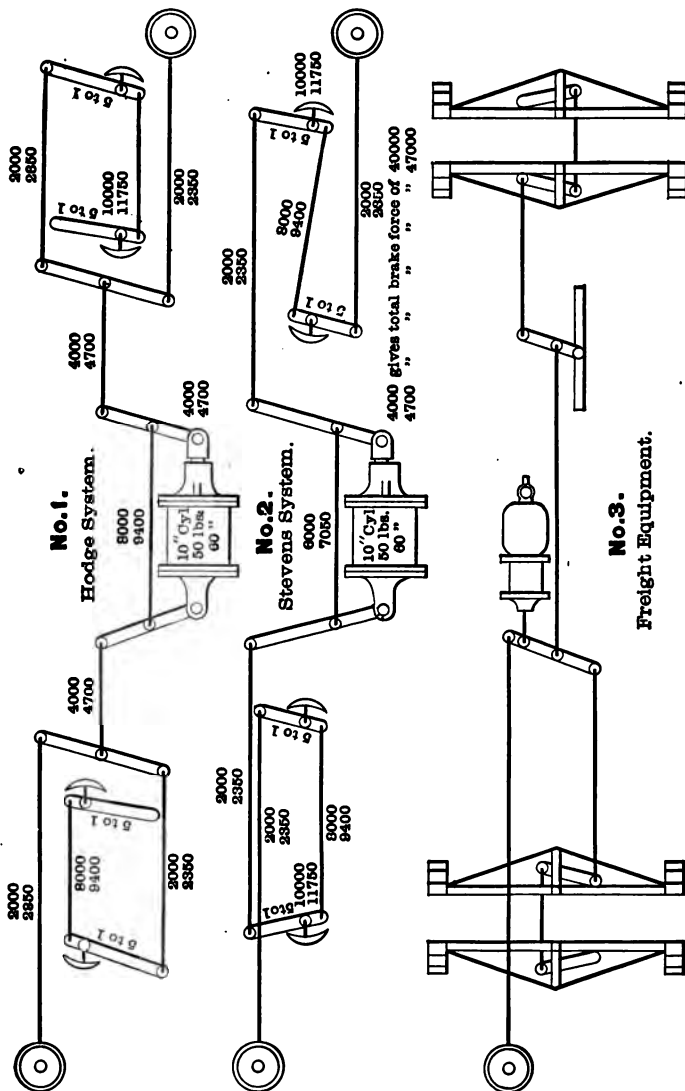

CAR BRAKE LEVERS—CONTINUED.

WESTINGHOUSE.

The Hodge and Stevens systems of car brake levers are shown in Figs. 1 and 2, page 42. The Stevens differs from the Hodge in that the floating or Hodge lever (which is interposed between the cylinder levers and the truck lever in the Hodge system) is omitted and the outer end of the cylinder lever is extended sufficiently to couple directly with the truck lever, the added length of the cylinder lever reducing the force transmitted, so that the effect at the brake shoe is precisely the same as in the Hodge system. Both systems are employed for passenger car brake gear, the preference for either being much a matter of personal choice. While the Stevens system is somewhat simpler than the Hodge, the latter, as usually applied to passenger cars, admits of a better hand brake gear than the former, and, for this reason, is generally preferred for this service.

Special provision for the use of the Stevens system is made in the construction of the automatic freight car brake apparatus as shown in Fig. 3, page 42 by which an equally efficient hand gear is had as with the Hodge system.

The peculiar construction of the various classes of railway vehicles often necessitates modifications of either system in the application of the brake gear.

CAR BRAKE LEVERS—CONTINUED.

WESTINGHOUSE.

The relative forces existing in the Quick Action Automatic Brake when applied for a "service" or "emergency" stop are shown in Figs. 1 and 2 with the *given* proportion of levers, resulting from 70 pounds pressure of air in the train pipe and auxiliary reservoirs, rating the air pressure upon the piston at 50 pounds per square inch in a "service" and 60 pounds in an "emergency" application of the brakes. The lesser figures also show the total effect at the brake shoes, when using the old style triple valves with levers of the same proportion.

When either system of brake gear is applied to a car, having decided upon the proportions of the truck levers best suited to the car truck, and the total length of the cylinder levers, the following rules may be used in calculating the required proportions of the cylinder lever.

To find the total power required:

Subtract 10 per cent. of the weight of the car *at the track under the wheels*, to which brakes are to be applied, for passenger cars, and 30 per cent. for freight cars.

To find the leverage required:

Divide the total brake power required by the *whole* pressure on the piston.

To find the proportion of the brake beam levers:

Divide the *whole* length of the lever by the short end.

CAR BRAKE LEVERS—CONTINUED.

WESTINGHOUSE.

To find the total brake beam leverage:

Multiply the proportion of the brake beam lever by two (2) for the *Hodge* system and by four (4) for the *Stevens*.

To find the proportion of cylinder lever:

Multiply the *whole* length of the lever by either the *required* leverage or the total brake beam leverage, and divide by the sum of both; the result will give the length of one end of the lever.

If the required leverage is greater than the *total* brake beam leverage, the long end of the lever must go next to the cylinder, if less, the short end must go next to the cylinder.

Dead levers must be made in the same proportion as the live truck levers.

EXAMPLE—HODGE SYSTEM.

Weight of car	40,000 lbs.
“ “ “ less 10 per cent	36,000 “
Total pressure on 10-inch cylinder, emergency	4,700 “
Total length of brake beam levers	28 inches.
Length of short end of brake beam lever.....	7 “
Total length of cylinder lever	24 “
36000 ÷ 4700 = 7.66, leverage required.	
28 ÷ 7 = 4 × 2 = 8, total brake beam leverage.	
24 × 7.66 = 183.84 ÷ (8 + 7.66) = 11.74, short end of cylinder lever.	
24 - 11.75 = 12.26, long end of cylinder lever.	

EXAMPLE—STEVENS SYSTEM.

Total length of cylinder lever, 36 inches.	
36000 ÷ 4700 = 7.66, leverage required.	
28 ÷ 7 = 4 × 4 = 16, total brake beam leverage.	
36 × 7.66 = 275.76 ÷ (7.66 + 16) = 11.66, short end of cylinder lever.	
36 - 11.66 = 24.34, long end of cylinder lever.	

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

DIMENSIONS.

Length over end sills, 52 feet 5 inches.

Width over side sills, 9 feet 8 inches.

Westinghouse air brakes.

Steam heat.

Frost lights.

Miller platforms.

4-wheel trucks, 36-inch steel wheels.

LUMBER.

2 side sills, yellow pine,	5 in. x 8 in. x 52 ft. 5 in.	444 feet.
2 center sills, yellow pine,	4 in. x 8 in. x 51 ft. 9 in.	367 "
2 inter. " " "	4 in. x 8 in. x 51 ft. 9 in.	367 "
2 truss plank, " "	2½ in. x 10½ in. x 52 ft.	285 "
2 side plates, " "	2½ in. x 4 in. x 52 ft. 8 in.	119 "
2 deck sills, " "	2½ in. x 5½ in. x 54 ft. 5 in.	139 "
2 " plates, " "	2½ in. x 3 in. x 53 ft.	87 "
2 belt rails, " "	2½ in. x 5 in. x 55 ft. 6 in.	163 "
		1971 feet.
2 end plates, yellow pine,	3½ in. x 16½ in. x 10 ft.	112 "
4 side braces, " "	1½ in. x 8 in. x 15 ft. 4 in.	84 "
2 " " " "	1½ in. x 4 in. x 10 ft.	13 "
12 side braces, counter, yellow pine, 1½ inches x 6 inches		73 "
100 studding, yellow pine, 1½ inches x 4 inches x 6 feet 11 in.		459 "
Bridging, blocking, etc.		475 "
		1216 "
Flooring, top, quarter sawed, ¾ inch x 2½ inches.		649 "
		649 "
Flooring, bottom, plain ¾ inch x 2½ inches.		690 "
		690 "

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

LUMBER—CONTINUED.

2 end sills, oak, $6\frac{3}{4}$ inches x 8 inches x 9 feet $2\frac{1}{2}$ inches.....	109 feet.	
2 cross ties, " $4\frac{1}{2}$ " x $7\frac{1}{2}$ " x 9 " 8 "	67 "	
		176 feet.
1 platform end sill, oak, 7 in. x 8 in. x 8 ft. 6 in....	45 feet.	
4 " center timbers, oak, 4 in. x 12 in. x 14 ft	264 "	
4 " inter. " 4 in. x 12 in. x 14 ft	264 "	
4 " step " $2\frac{1}{2}$ in. x 10 in. x 3 ft	28 "	
2 " truss blocks, " 6 in. x 6 in. x 4 ft	32 "	
2 " " " 6 in. x $6\frac{1}{2}$ in. x 1 ft. 2 in...	10 "	
2 " buffer " $6\frac{1}{2}$ in. x $8\frac{1}{2}$ in. x 1 ft	11 "	
2 " " " $2\frac{1}{2}$ in. x $6\frac{1}{2}$ in. x 1 ft. $2\frac{1}{2}$ in..	5 "	
Blocking, oak	30 "	
		689 "
Letter boards and eave mouldings, poplar	460 feet.	
Corner and door posts, poplar.....	196 "	
Side and end siding and mouldings, poplar.....	730 "	
Deck frame and finish, poplar	1326 "	
Hoods " " " "	409 "	
Deafening floor, poplar.....	1261 "	
		4382 "
Roofing, upper and lower deck, white pine	1233 "	
Inside finish, complete, mahogany.....	1960 "	
		VENEERS.
Whitewood, head lining.....	872 "	
White oak, " "	1352 feet.	

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

FORGINGS.

2 body bolsters	1	inch x 8 inches	1013 lbs.
4 " truss rods,	1 $\frac{1}{4}$	"	308 "
4 " " " anchors,	$\frac{3}{4}$	" x 3 inches	142 "
4 " " " " bolts,	1 $\frac{1}{4}$	"	8 "
2 " " " inside	$\frac{3}{8}$	" x 1 $\frac{3}{4}$ inches	217 "
4 " " " ends,	$\frac{7}{8}$	"	33 "
4 " " " studs,	1 $\frac{1}{2}$	" $\frac{7}{8}$ inch brace	46 "
4 angle irons for steps,	1 $\frac{5}{8}$	inch x 2 $\frac{1}{2}$ inches	21 "
8 " " " platforms,	$\frac{3}{8}$	" x 1 $\frac{1}{2}$ "	9 "
4 " " " truss plank,	$\frac{1}{2}$	" x 1 $\frac{1}{2}$ "	9 "
4 " " " saloon,	$\frac{1}{4}$	" x 1 $\frac{1}{2}$ "	2 "
8 carlines,	$\frac{5}{8}$	inch x 1 $\frac{1}{2}$ inches	328 "
4 " extra,	$\frac{1}{2}$	" x 2 "	38 "
4 plates on cross ties,	$\frac{3}{8}$	inch x 4 inches	11 "
2 air drum bands	$\frac{3}{8}$	" x 1 $\frac{1}{2}$ "	11 "
2 king bolts,	1 $\frac{1}{4}$	"	40 "
4 body hand rails,	$\frac{5}{8}$	"	28 "
2 brake chains,	$\frac{3}{8}$	" x 3 feet 10 inches	12 "
2 platform rail chains,	$\frac{1}{4}$	"	2 "
4 hose coupling chains,	$\frac{1}{2}$	"	3 "
8 air pipe hangers,	$\frac{1}{4}$	inch x 1 $\frac{1}{2}$ inches	4 "
4 steam pipe hangers,	$\frac{3}{8}$	" x 2 "	15 "
3 frost light bands,	$\frac{3}{8}$	" x 1 $\frac{3}{4}$ "	15 "
Body rods			482 "
Body bolts.....			297 "
Amount carried forward.....			3094 lbs.

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

FORGINGS—CONTINUED.

Amount brought forward.....		3094 lbs.
2 Miller carry irons, front,	$\frac{3}{4}$ inch x 4 inches.....	43 "
2 " " " back,	$\frac{1}{2}$ " x 3 "	26 "
4 " followers,	$1\frac{1}{2}$ " x 6 "	70 "
2 " tail pins,	$1\frac{3}{4}$ "	30 "
4 " spring pockets,	$\frac{7}{8}$ " x 4 inches.....	240 "
2 " uncoupling levers		50 "
2 " " " guides,	$\frac{3}{8}$ inch x 1 inch	4 "
2 " " " chains,	$\frac{3}{8}$ "	10 "
2 " boot braces,	$\frac{7}{8}$ "	11 "
2 " buffers.....		64 "
2 " followers,	$\frac{3}{4}$ inch x 6 inches.....	17 "
2 " face plates,	$\frac{3}{8}$ " x 7 "	32 "
8 platform pillars,	$1\frac{1}{2}$ inches.....	84 "
4 " hand rails,	$\frac{1}{2}$ " x 2 inches.....	90 "
2 " brake masts,	$1\frac{1}{4}$ "	55 "
2 " " " steps,	$\frac{5}{8}$ " x $2\frac{1}{2}$ inches.....	51 "
2 coupling pins and chains,	$1\frac{1}{2}$ inches.....	30 "
4 safety chains and loops	1 "	72 "
4 nosing bands,	$\frac{1}{8}$ " x 4 inches.....	7 "
12 hook rods,	$\frac{7}{8}$ inch	273 "
4 " " plates,	$\frac{1}{2}$ " x 5 inches.....	7 "
Platform bolts		148 "
Amount carried forward.....		4521 lbs.

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

FORGINGS—CONTINUED.

Amount brought forward.....			4521 lbs.
2 cylinder levers,	1	1 inch x 4 inches.....	53 "
2 floating "	1	" x 3½ "	58 "
2 lever guides,	½	" x 1½ "	23 "
2 carry irons and links,	¾	" x 2½ "	25 "
1 cylinder rod,	1	"	21 "
6 main rods,	¾	"	188 "
2 stops for rods,	¾	" x 4 inches.....	17 "
2 hangers for rods,	¾	"	2 "
9 " " air pipe,	¼	" x 1½ inches.....	20 "
14 connection pins,	1½	"	17 "

4945 lbs.

CASTINGS.

2 body center plates.....	124 lbs.
4 " side bearings.....	70 "
2 " bolster spiders.....	58 "
8 " " thimbles.....	34 "
2 thresholds.....	24 "
2 " sills.....	21 "
4 inside truss rod saddles.....	12 "
2 " " " washers.....	23 "
4 truss rod queen posts.....	38 "
4 " " end plates.....	17 "
4 brace shoes.....	22 "
4 " keys.....	21 "

Amount carried forward..... 464 lbs.

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

CASTINGS—CONTINUED.

Amount brought forward.....	464 lbs.
4 corner irons.....	118 "
2 king bolt plates.....	4 "
2 bell cord washers.....	1 "
30 pipe covers.....	255 "
12 seat back catches.....	6 "
6 " foot rests.....	21 "
8 platform pillar washers.....	12 "
2 " brake wheels.....	30 "
2 " " ratchets.....	13 "
2 " boots.....	53 "
2 " eye-bolt washers.....	2 "
2 " buffer bushings.....	10 "
2 " " spring seats.....	19 "
2 " lever rests and plates.....	17 "
4 " coupling pin plates.....	2 "
2 " lever keys.....	6 "
8 " truss rod washers.....	16 "
4 " brake mast guides.....	12 "
2 " " " ".....	4 "
2 " " chain spools.....	20 "
4 " safety chain pockets.....	16 "
2 " spring stays.....	14 "
	1115 lbs.

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

TRIMMINGS.

1	bell cord, 80 feet	\$ 0 80	
1	" " guide	14	
2	" " bushings	16	
10	" " "	1 45	
1	" " pulley	35	
14	" " straps	1 54	
2	" " couplings	13	
7	" " hangers and sheaves	6 58	
2	" " tubes	16	
			\$11 31
3	pair butts, acorn, 3½ inches x 3 inches	3 66	
1½	" " " 3½ " x 2½ "	1 68	
1	" " hopper cover	46	
3	" " broad	08	
			5 88
1	box brass escutcheon pins	38	
15	basket racks	73 35	
30	brass bushings	15	
1	card of instructions	25	
1	combination hook	70	
			74 83
2	door holders	1 00	
2	" sash catches and plates	45	
2	sash pivots and bushings	25	
			1 70
34	Hart's ratchets	8 50	
34	" pulls	1 70	
4	hooks, iron	02	
			10 22
	Amount carried forward		\$103 94

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

TRIMMINGS—CONTINUED.

Amount brought forward.....	\$103 94
2 locks R. H. coach	8 00
1 " L. H.	2 14
1 latch, combination	4 40
1 lead pipe.....	30
2 O. S. door bolts.....	52
2 platform notice plates.....	90
1 smoke jack.....	90
34 sash locks.....	6 46
34 " lifts.....	3 80
152 " springs.....	1 52
102 " stops.....	2 04
1 saloon hopper.....	5 00
1 " " chute	26
1 " urinal.....	4 10
1 " " pipe.....	68
1 " " drip pan	2 90
8 tin tubes and flanges.....	56
2 transom sash stops	66
1 ventilator.....	60
1 water cooler, complete.....	7 15
2 key blanks.....	30
2 " escutcheons.....	15
	————— \$157 28

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

GLASS.

34 lights,	24	inches x 24	inches.....	\$14 28
34 "	10	" x 24	"	4 42
2 "	20	" x 24	"	68
2 "	10	" x 20	"	22
4 "	15	" x 18	"	60
136 " deck, 6	"	" x 7	" embossed.....	8 16
3 "	11½	" x 13½	"	27
1 "	14	" x 36	"	22
				<hr/> \$ 28 25

CURTAINS.

34 imperial curtain fixtures, 27½ inches.....	\$34 00
2 " " " 23½ "	2 00
36 tin rollers, 1-inch, 27½ "	7 20
Curtain material, 18 yards.....	38 70
Silk binding, 57 "	1 70
Holland, 3 "	90
Leather.....	8 50
Silk thread.....	1 00
Cotton thread.....	05
<hr/>	
94 05	

FROST LIGHTS.

Equipment complete, 3 lights.....	315 00
-----------------------------------	--------

STEAM HEAT.

Equipment complete.....	125 00
-------------------------	--------

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

UPHOLSTERY MATERIAL.

Burlaps,	48	yards	@	\$0 05½	\$2 76
Sheeting,	60	"	@	12	7 20
Cotton,	25	lbs.	@	12	3 00
Grey hair,	150	"	@	31	46 50
Tow,	150	"	@	2½	3 75
Spring twine,	1½	"	@	12	18
Stitching twine,	6	"	@	24	1 44
Maroon plush,	86	yards	@	1 40	134 40
Old gold "	31	"	@	1 40	43 40
Montana duck,	22	"	@	19	4 18
Ontario "	20	"	@	24½	4 95
Spiral springs,	60		@	1	60
Cotton thread,	2	spools	@	5	10
Red linen thread,	3	"	@	8	24
						<hr/> \$252 70
27 spring-edge cushion frames and backs						115 00
27 metal fixtures, complete, H. & K.....						142 00
						<hr/> 257 00

TINNER'S MATERIAL.

Terne tin,	203	lbs.	@	\$0 13	26 39
Solder,	39	"	@	15	5 11
Sheet copper,	60	"	@	19	11 40
" zinc,	30	"	@	5½	1 65
Galvanized iron,	38	"	@	5½	2 09
Charcoal "	52	"	@	4	2 08
Russia "	10	"	@	10	1 00
						<hr/> \$49 72

STANDARD COACH.

DETAIL BILL OF MATERIAL IN BODY.

MISCELLANEOUS.

2 Miller hooks, complete, cast steel	\$ 35 00	
2 " " springs, 3 feet 6 inches long	4 50	
2 draw springs, 6 inches x 8 inches, 2 coil.....	1 50	
2 buffer " 6 " x 8 " 2 "	1 50	
2 turnbuckles, Cleveland, 1½ inch.....	70	
		\$ 43 20
Westinghouse air brake, complete, schedule C.....	100 00	
" signal, schedule K	10 00	
" pipes and fitting	11 60	
		121 60
Brass wire cloth, 88 feet.....	8 80	
Weather strips, ½ inch, 275 "	6 87	
" " oak, 78 "	3 13	
		18 80
Wrecking tools, saw, axe and sledge.....	2 50	
Nuts, 130 lbs.....	5 25	
Washers, 67 "	2 00	
Lag screws, 110 "	1 10	
Nails, 150 "	7 50	
Screws, 79 gross	33 25	
		51 60
Glue, 140 lbs.....	22 40	
Sand paper, 38 quires	6 00	
		28 40
Paint material, complete		\$110 00

STANDARD COACH.

SUMMARY.

Lumber, yellow pine, long.....	1971 feet.
“ “ “ short.....	2555 “
“ oak.....	865 “
“ poplar.....	4382 “
“ white pine.....	1233 “
“ mahogany.....	1960 “
Veneers, white wood.....	872 “
“ “ oak.....	1352 “
Forgings.....	4945 lbs.
Castings.....	1115 “
Trimmings	\$157 28
Glass.....	28 85
Curtains.....	94 05
Upholstery material.....	509 70
Air brakes complete.....	121 60
Steam heat “	125 00
Frost lights “	315 00
Tin material “	49 72
Paint material complete.....	110 00
Miscellaneous.....	142 00

LABOR.

Lumber yard and mill.
 Car builders and cabinet makers.
 Blacksmith and machine shop.
 Tinnerns and steamfitters.
 Painters and upholsterers.
 Glass work and silver platers.

STANDARD 4-WHEEL TRUCKS.

DETAIL BILL OF MATERIAL.

DIMENSIONS.

Center to center of journals, 8 feet.

Steel wheels, 36 inches.

Journals, M. C. B. standard, $3\frac{1}{4}$ " x 7 inches.Brasses, " " " " $3\frac{1}{4}$ " x 7 "

Steel brake beams.

Wheel pieces, plated both sides.

End sills, plated on top.

Bolsters, plated, 2 flitch plates.

LUMBER.

4 wheel pieces, white oak,	4 inches x 7 inches x 12 feet.....	158 feet.
4 cross " " "	$4\frac{1}{2}$ " x 9 " x 6 " 8 inches....	123 "
4 end sills, " " "	$4\frac{1}{2}$ " x 6 " x 7 feet.....	88 "
8 safety beams, " " "	3 " x 10 " x 5 " 4 inches....	165 "
4 bolster pieces, " " "	$4\frac{1}{2}$ " x 8 " x 5 " 6 "	90 "
2 " " " " "	7 " x 8 " x 5 " 6 "	72 "
4 spring plank, " " "	3 " x $8\frac{3}{8}$ " x 5 " 8 "	84 "
8 dust guards, elm,	$\frac{9}{16}$ " x $6\frac{1}{2}$ " x 9 inches	5 "

785 feet.

FORGINGS.

8 wheel piece plates,	$\frac{3}{8}$ inch x 7 inches x 12 feet	818 lbs.
4 end sill plates,	$\frac{1}{2}$ " x 4 " x 6 " $6\frac{1}{2}$ inches	170 "
8 tie plates, wheel piece,	$\frac{5}{8}$ " x 3 "	75 "
4 bolster plates,	$\frac{3}{4}$ " x 6 " x 5 feet 6 inches	332 "
4 equalizers,	2 " x $4\frac{1}{2}$ " x 8 " ctrs.....	1044 "
4 pedestal tie bars,	$\frac{5}{8}$ " x 3 "	318 "
4 " cross tie bars,	$\frac{3}{4}$ " $\frac{1}{2}$ " x $2\frac{1}{2}$ inches, ends.....	54 "

Weight carried forward 2811 lbs.

STANDARD 4-WHEEL TRUCKS.

DETAIL BILL OF MATERIAL.

FORGINGS—CONTINUED.

Weight brought forward				2811 lbs.
8 bolster hangers,	1½ inches	x 4 inches x 10 inches ctrs..	140 "	
8 " " U-bolts,	1 "	x 2 feet x 7½ "	53 "	
8 " " pins, top,	1½ "	20 "	
4 " " " bottom,	2 "	x 3 inches x 2 inches ends....	157 "	
8 " " " keys,	½ "	2 "	
4 " safety straps,	¾ "	x 3½ inches	203 "	
8 axle " "	¾ "	x 2½ "	90 "	
2 live levers,	1 inch	x 4 inches.....	60 "	
2 " " guides,	¾ "	x 2 " x 4 feet 8 inches.	32 "	
2 dead " "	1 "	x 4 "	60 "	
2 " " guides,	¾ "	x 2½ " x 5 feet.....	55 "	
4 compression straps,	¾ inch	x 3 inches x 2 feet 1½ inches	54 "	
8 washer plates, U-bolts,	¼ "	x 1½ "	3 "	
8 cross truss rods,	7/8 "	square x 7 feet ¾ inch.....	144 "	
8 brake beam safety straps,	½ inch	x 2 inches.....	52 "	
8 " springs,	¾ "	x 3 "	84 "	
4 " balance springs,	¾ "	x 3 "	20 "	
8 " hangers,	7/8 "	37 "	
2 " connection rods,	1 "	82 "	
10 " " pins,	1½ "	12 "	
8 check chains,	¾ "	x 2 feet 3 inches	70 "	
				4241 lbs.

SUMMARY OF FORGINGS.

Truck forgings.....	4067 lbs.
" rods and bolts.....	446 "
" brake springs.....	104 "
" safety chains.....	70 "

STANDARD 4-WHEEL TRUCKS.

DETAIL BILL OF MATERIAL.

CASTINGS.

8 pedestals.....	1282 lbs.
8 oil boxes, M. C. B. lids	730 "
2 center plates.....	125 "
4 side bearings.....	70 "
4 truss rod saddles.....	18 "
8 " " washers.....	23 "
16 bolster chafe plates.....	110 "
8 spiral spring caps.....	174 "
8 " " seats	126 "
8 elliptic " "	71 "
8 bolster hanger castings.....	44 "
8 brake " "	24 "
8 " shoes.....	144 "
2 dead lever brackets.....	19 "
4 lever guide washers.....	10 "
76 cast washers.....	52 "

3022 lbs.

MISCELLANEOUS.

8 steel wheels, 36 inches.
 4 axles, 3 $\frac{1}{4}$ -inch x 7-inch journals.
 8 brasses, M. C. B. standard.
 8 wedges, " " "
 8 box lids, Morris pressed steel.
 4 steel brake beams, National hollow.
 4 elliptic springs, quadruple, 4-ply.
 8 equalizer. " 8 inches x 10 inches, 3 coil.

STANDARD 4-WHEEL TRUCKS.

SUMMARY.

Lumber, white oak.....	785 feet.
Wrought iron forgings.....	4067 lbs.
" " rods and bolts.....	446 "
" " safety chains.....	70 "
Steel brake springs.....	104 "
Castings.....	3022 "
Steel wheels, 36 inches.	
Axles, hammered scrap, 3 $\frac{1}{4}$ -inch x 7-inch journal.....	1650 "
Brasses, M. C. B., bronze.....	72 "
Wedges, " " " malleable iron.....	37 "
Box lids, Morris pressed steel.	
Brake beams, National hollow.	
Elliptic springs, quadruple 4-ply.	
Equalizer springs, 8 inches x 10 inches, 3 coil.....	510 "
Square nuts.....	100 "
Wrought washers.....	10 "
Flat-head screws.....	1 gross
Lubricating oil.....	10 gals.
Wool waste.....	15 lbs.
Paint material.	

LABOR.

STANDARD 6-WHEEL TRUCKS.

DETAIL BILL OF MATERIAL.

DIMENSIONS.

Center to center of journals, 5 feet.

Steel wheels, 36 inches.

Journals, $4\frac{1}{2}$ inches x 8 inches.Brasses, $4\frac{1}{2}$ inches x 8 inches.

Steel brake beams.

Wheel pieces, plated both sides and top.

End sills, " top and bottom.

Bolsters, " 2 flitch plates.

LUMBER.

2 wheel pieces, white oak, 4 inches x $7\frac{1}{8}$ inches x 14 feet 10 inches.....	184 feet.
4 end sills, 5 " x 9 " x 6 " $11\frac{1}{2}$ "	131 "
4 cross timbers, " " $4\frac{1}{2}$ " x 8 " x 6 " $7\frac{1}{2}$ "	107 "
4 bolster pieces, " " $4\frac{1}{2}$ " x 9 " x 7 " 9 "	137 "
8 " " " " $2\frac{1}{2}$ " x 9 " x 7 " 9 "	143 "
2 " blocks, " " 8 " x $9\frac{1}{2}$ " x 2 " $10\frac{1}{2}$ "	45 "
4 " " " " $2\frac{1}{2}$ " x 8 " x 2 " $10\frac{1}{2}$ "	26 "
2 spring plank pieces, " 3 " x 12 " x 5 " $8\frac{1}{2}$ "	45 "
2 " " " " 3 " x 11 " x 5 " $8\frac{1}{2}$ "	41 "
8 safety beams, white " 3 " x 10 " x 4 " $3\frac{3}{4}$ "	113 "
4 " " " " 3 " x $7\frac{1}{2}$ " x 3 " $10\frac{1}{2}$ "	39 "
12 dust guards, elm, $1\frac{1}{8}$ " x $6\frac{1}{8}$ " x $8\frac{3}{4}$ inches.....	7 "

1018 feet.

STANDARD 6-WHEEL TRUCKS.

DETAIL BILL OF MATERIAL.

FORGINGS.

8 equalizers,	2 inches x 5½ inches x 5 feet ctrs	1636 lbs.
8 bolster plates,	$\frac{3}{4}$ " x 4 " x 7 feet 9 inches	610 "
8 wheel piece plates, face,	$\frac{3}{8}$ " x 7 " x 14 " 8½ "	990 "
4 " " " top,	$\frac{3}{8}$ " x 4½ " x 14 " 8½ "	364 "
4 cross timber "	$\frac{3}{8}$ " x 4½ " x 5 " 10 "	128 "
8 end sill "	$\frac{1}{2}$ " x 5 "	396 "
4 center plate block plates,	$\frac{3}{4}$ " x 8 " x 2 feet 10 inches	188 "
8 cross truss rods,	$\frac{7}{8}$ inch square, 1-inch ends.....	142 "
4 cross sections,	1½ " x 6 inches.....	732 "
4 center bearings,	1½ " x 4 "	916 "
4 side bearings,	2 " x 3½ "	435 "
4 " " steel plates,	$\frac{3}{8}$ " x 2 "	11 "
2 carry irons, center fulcrum,	$\frac{3}{4}$ " x 4 "	83 "
12 axle safety straps,	$\frac{5}{8}$ " x 3 "	167 "
4 pedestal tie bars,	1½ " $\frac{5}{8}$ " x 3½-inch ends.....	440 "
4 " cross tie bars,	1 "	72 "
12 brake hangers,	1 inch	74 "
4 " " plates,	$\frac{5}{8}$ " x 3 inches.....	39 "
12 " " bolts,	1 "	25 "
12 " beam safety straps,	$\frac{1}{4}$ " x 3 inches.....	139 "
6 " " fulcrums,	$\frac{3}{4}$ " x 2½ "	95 "
12 " " " rivets,	$\frac{3}{4}$ "	5 "
4 " " plates,	$\frac{5}{8}$ " x 1½ inches.....	7 "
4 " fulcrum safety straps,	1 " square.....	21 "
4 " balance spring stays,	1 " "	16 "
Weight carried forward		7731 lbs.

STANDARD 8-WHEEL TRUCKS.

DETAIL BILL OF MATERIAL.

FORGINGS—CONTINUED.

Weight brought forward.....			7731 lbs.
2 crescent fulcrums,	1 inch x 4 inches.....		136 "
4 " " rivets,	$\frac{3}{4}$ "		2 "
2 live levers,	1 " x 6 inches.....		79 "
2 balance levers,	1 " x $4\frac{1}{2}$ "		17 "
4 connection rods,	$1\frac{1}{8}$ "		85 "
4 " pins,	$1\frac{1}{8}$ "		11 "
24 " "	$1\frac{1}{8}$ "		26 "
12 brake springs,	$\frac{3}{8}$ inch x 3 inches.....		70 "
6 " release springs,	$\frac{3}{8}$ " x 3 "		50 "
8 " shoe keys,	$\frac{1}{8}$ " x 1 "		10 "
16 bolster hangers.....			342 "
4 " " bands,	$\frac{3}{4}$ inch x 3 inches.....		179 "
16 " " pins,	$1\frac{1}{8}$ "		25 "
8 " " " bottom,	2 "		124 "
8 " chafe plates,	$\frac{1}{8}$ " x 6 inches x 8 inches.....		15 "
16 washer plates,	$\frac{1}{4}$ " x 2 " x $7\frac{1}{2}$ "		16 "
8 check chains,	$\frac{3}{8}$ " 1-inch eye bolt.....		93 "

9011 lbs.

SUMMARY OF FORGINGS.

Wrought iron, forgings.....	8798 lbs.
" " bolts.....	643 "
Steel, brake springs.....	120 "
Chain.....	93 "
Nuts and washers.....	205 "

STANDARD 6-WHEEL TRUCKS.

DETAIL BILL OF MATERIAL.

CASTINGS.

12 pedestals.....	1932 lbs.
12 oil boxes.....	996 "
12 " " lid ferrules.....	5 "
2 center plates.....	199 "
8 spiral spring seats.....	168 "
8 " " caps.....	136 "
8 elliptic spring seats, bottom.....	56 "
8 " " " top.....	42 "
8 spring plank bearings.....	92 "
8 bolster hangers.....	52 "
8 " " caps.....	14 "
8 " chafe plates.....	48 "
8 brake hangers, outside.....	130 "
12 " shoes.....	307 "
4 truss rod saddles.....	20 "
16 " " washers.....	24 "
24 cast washers, $\frac{3}{4}$ -inch.....	12 "

4233 lbs.

MISCELLANEOUS.

12 steel wheels, 36 inches.	
6 scrap axles, $4\frac{1}{4}$ -inch x 8-inch journals.....	2822 lbs.
12 brasses, M. C. B., $4\frac{1}{4}$ inches x 8 inches.....	149 "
12 wedges, " " malleable iron.....	84 "
12 box lids, Morris pressed steel.	
8 elliptic springs, duplicate 36 inch, 5-ply.....	2157 "
8 spiral " 8 inches x $10\frac{1}{2}$ inches, 3 coil.....	576 "
6 steel brake beams.	

STANDARD 6-WHEEL TRUCKS.

SUMMARY.

Lumber, white oak.....	1018 feet.
Wrought iron forgings.....	8798 lbs.
" " bolts.....	643 "
" " safety chains.....	93 "
Steel brake springs.....	120 "
Castings.....	4233 "
Steel wheels, 36 inches.	
Scrap axles, 4½-inch x 8-inch journals.....	2822 "
Brasses, M. C. B., bronze.....	149 "
Wedges, " " " malleable	84 "
Box lids, Morris pressed steel.	
Elliptic springs, duplicate 36-inch, 5-ply.....	2157 "
Equalizer springs, 8 inches x 10½ inches, 3 coil.....	576 "
Square nuts	190 "
Wrought washers.....	15 "
Flat-head screws.....	1 gross
Brake beams, National hollow.	
Lubricating oil.....	15 gals.
Wool waste.....	22 lbs.
Paint material.	

LABOR.

STANDARD CABOOSE TRUCKS.

DETAIL BILL OF MATERIAL.

DIMENSIONS.

Center to center of journals, 5 feet.

Cast-iron wheels, 600 lbs., 33 inches.

Journals, M. C. B., 4 inches x 7 inches.

Brasses, " " " 4 " x 7 "

LUMBER.

4 wheel pieces,	4½ inches x	7¾ inches x	8 feet 7½ inches.....	128 feet.
4 cross "	5¾ "	x 13 "	x 7 " 5 "	220 "
4 end "	4 "	x 6 "	x 7 " 3½ "	72 "
8 safety "	3 "	x 8 "	x 3 " 6 "	69 "
2 bolsters,	10 "	x 10½ "	x 5 " 6 "	115 "
2 spring plank,	3 "	x 12 "	x 5 " 6 "	44 "
8 dust guards,	¾ "	x 5½ "	x 9½ inches.....	3 "
				651 feet.

FORGINGS.

4 equalizers,	2 inches x 3 inches.....	550 lbs.
4 pedestal tie bars,	¾ " x 2½ "	234 "
8 bolster hangers,	1½ " x 3 "	160 "
8 " " top pins,	1½ "	22 "
4 " " bottom pins,	1½ " x 3 inches.....	90 "
8 axle safety straps,	¾ " x 2½ "	120 "
8 cross timber angle plates,	¾ " x 5 "	120 "
8 " " truss rods,	7/8 "	112 "
8 brake beam " "	¾ "	48 "
2 live levers,	1 " x 3 inches.....	50 "
2 dead "	1 " x 3 "	50 "
4 lever guides,	¾ " x 2½ "	42 "

Amount carried forward..... 1598 lbs.

STANDARD CABOOSE TRUCKS.

DETAIL BILL OF MATERIAL.

FORGINGS—CONTINUED.

Amount brought forward.....			1598 lbs.
8	brake hangers,	$\frac{7}{8}$ inch.....	40 lbs.
8	" safety chains and eyes,	$\frac{1}{2}$ "	20 "
8	" springs (steel),	$\frac{3}{8}$ " x 2 inches.....	42 "
4	" fulcrums,	$\frac{3}{4}$ " x 2 $\frac{1}{2}$ "	36 "
2	" connection rods,	$\frac{7}{8}$ "	60 "
10	" " pins,	1 $\frac{1}{8}$ "	12 "
			<hr/> 210 lbs.
			<hr/> 1808 lbs.
Bolts and nuts in trucks.....			150 "

CASTINGS.

8	pedestals.....	960 lbs.
8	oil boxes.....	640 "
2	center plates.....	125 "
4	side bearings.....	80 "
4	truss rod saddles.....	60 "
8	" " washers.....	8 "
16	bolster chafe plates.....	32 "
8	" spring seats.....	72 "
8	spiral " " top.....	160 "
8	" " " bottom.....	240 "
8	brake heads.....	168 "
8	" shoes.....	160 "
8	" beam washers.....	42 "
4	" " truss rod saddles.....	34 "
8	" hanger bearings.....	24 "
Cast washers.....		22 "
		<hr/> 2827 lbs.

STANDARD CABOOSE TRUCKS.

DETAIL BILL OF MATERIAL.

SUMMARY.

Lumber, white oak.....	651 feet.
Wrought iron forgings.....	1808 lbs.
" " bolts.....	110 "
Castings.....	2827 "
Wheels, 33 inches, 600 lbs.....	4800 "
Axles, 4-inch x 7-inch journals	1520 "
Brasses, 4 inches x 7 inches, M. C. B., solid	72 "
Wedges	56 "
Elliptic springs, duplicate 28-inch x 6 $\frac{1}{4}$ -inch, $\frac{3}{8}$ -inch x 4-inch, 4 plts.....	564 "
Equalizer " 6 inches x 6 inches, 2 coil, 1 $\frac{1}{8}$ inches and $\frac{3}{4}$ inch	184 "
Nuts and washers.....	40 "
Lubricating oil	8 gals.
Waste	15 lbs.
Paint material	1 $\frac{1}{2}$ gals.

LABOR.

CABOOSE PLATFORMS.

DETAIL BILL OF MATERIAL.

LUMBER.

2 end timbers, white oak, 4½ inches x 6 inches x 8 feet 4 inches.....	46 feet.
4 center " " " 4½ " x 12 " x 12 "	248 "
4 inter. " " " .5 " x 12 " x 12 " 5 inches.....	286 "
4 step " " " 3 " x 8 " x 3 " 3 "	32 "
2 dead woods, " " 5 " x 5½ " x 2 " 4 "	14 "
8 step treads, " " 1½ " x 8 " x 2 " 6 "	20 "
8 " risers, white pine, 1½ " x 16 " x 3 "	48 "
2 platform floors, yellow pine, 2 feet 3 inches x 5 feet 8 inches.....	30 "

FORGINGS.

4 platform hand rails, ½ inch x 2 inches....	86 lbs.
8 " pillars, 1½ "	84 "
2 brake masts, 1½ "	50 "
2 brake steps and carry irons, 1 " x 3 inches x 3 feet.....	60 "
2 buffer plates, ½ " x 4 " x 2 " 4 inches	40 "
4 followers, 1½ " x 6 " x 9 inches	76 "
8 " guides, ½ " x 2 " x 1 foot 4 inches.....	32 "
2 coupler yokes, 1 " x 4 " x 1 " 4 "	90 "
Rods and bolts in platforms.....	240 "

CAST IRON.

8 draw lugs.....	112 lbs.
2 brake wheels.....	30 "
2 " ratchets.....	12 "
2 " pawls.....	4 "
8 pillar washers.....	12 "
2 M. C. B. couplers.	
2 draw springs, 6 inches x 8 inches, 2 coil.....	64 "

**AVERAGE COST
OF
REPAIRS TO FREIGHT EQUIPMENT.**

The following figures are based on Master Car Builders' prices and include the labor necessary to remove and replace the materials specified, together with the cost of new material and credit for scrap material removed, except as otherwise specified.

Estimates of material are based on a standard car of 60,000 pounds capacity, 35 feet long by 8 feet 9 inches wide. Side sills, 5 inches x 9 inches; center sills, 5 inches x 9 inches; intermediate sills, 4½ inches x 9 inches, where two sills are used, or 3 inches x 9 inches when four sills are used; end sills, 6 x 9 inches.

Where 4 inch x 8 inch sills are used, charge \$1.00 less each sill.

FLOOR FRAME.

	Amount of Material.	Cost of Mate'l.	Cost of Apply- ing.	Total Cost.
1 side sill.....	140 feet.	\$ 3 50	\$ 5 00	\$ 8 50
2 " "	280 "	7 00	8 00	15 00
1 center sill.....	140 "	3 50	6 40	9 90
2 " "	280 "	7 00	7 60	14 60
1 intermediate sill.....	128 "	3 20	5 80	9 00
2 " "	256 "	6 40	7 00	13 40
3 " "	264 "	6 62	8 20	14 82
4 " "	352 "	8 80	9 40	18 20
1 side and 1 center sill.....	280 "	7 00	9 60	16 60
1 " " 2 " "	420 "	10 50	10 60	21 10
2 " " 1 " "	420 "	10 50	13 60	24 10
2 " " 2 " "	560 "	14 00	14 20	28 20
1 " sill replaced, same sill.....			5 00	5 00
2 " " " " "			8 00	8 00
1 " " spliced, 12-foot splice	48 "	1 20	2 40	3 60
1 inter " " 12 " "	40 "	1 00	2 20	3 20

REPAIRS TO FREIGHT EQUIPMENT.

FLOOR FRAME—CONTINUED.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 side and 1 intermediate sill.....	268 feet.	\$ 6 70	\$ 8 80	\$15 50
1 " " 2 " "	396 "	9 90	10 00	19 90
1 " " 3 " "	404 "	10 10	11 20	21 30
1 " " 4 " "	492 "	12 30	12 40	24 70
2 " " 1 " "	408 "	10 20	11 60	21 80
2 " " 2 " "	536 "	13 40	12 80	26 20
2 " " 3 " "	544 "	13 60	14 00	27 60
2 " " 4 " "	632 "	15 80	15 20	31 00
1 side, 1 inter. and 1 center sill.....	408 "	10 20	10 60	20 80
2 " 1 " " 1 " "	548 "	13 70	14 80	28 50
1 " 2 " " 1 " "	536 "	13 40	11 60	25 00
2 " 2 " " 1 " "	676 "	16 90	15 20	32 10
1 " 3 " " 1 " "	544 "	13 60	12 60	26 20
2 " 3 " " 1 " "	684 "	17 10	16 20	33 30
1 " 4 " " 1 " "	632 "	15 80	13 60	29 40
2 " 4 " " 1 " "	772 "	19 30	17 20	36 50
1 " 1 " " 2 " "	548 "	13 70	11 60	25 30
2 " 1 " " 2 " "	688 "	17 20	15 20	32 40
1 " 2 " " 2 " "	676 "	16 90	12 60	29 50
1 " 3 " " 2 " "	684 "	17 10	13 80	30 90
1 " 4 " " 2 " "	772 "	19 30	14 80	34 10
2 " 2 " " 2 " "	816 "	20 40	16 20	36 60
2 " 3 " " 2 " "	824 "	20 60	17 20	37 80
2 " 4 " " 2 " "	912 "	22 80	18 20	41 00

REPAIRS TO FREIGHT EQUIPMENT—CONTINUED.

FLOOR FRAME—CONTINUED.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 inter and 1 center sill.....	268 feet.	\$ 6 70	\$ 7 60	\$14 30
1 " " 2 " "	408 "	10 20	8 80	19 00
2 " " 1 " "	396 "	9 90	8 60	18 50
2 " " 2 " "	536 "	13 40	10 00	23 40
3 " " 1 " "	404 "	10 10	9 60	19 70
3 " " 2 " "	544 "	13 60	12 00	25 60
4 " " 1 " "	492 "	12 30	12 00	24 30
4 " " 2 " "	632 "	15 80	13 00	28 80
1 " or 1 " " when air brake is removed extra.....			75	75
1 sub sill or draft timber extension	18 "	45	30	75
1 body bolster, wood, old truss rods and castings..	56 "	1 40	1 60	3 00
1 body bolster, wood, old truss rods and castings, when sills are replaced.....	56 "	1 40	40	1 80
1 body bolster, new truss rods and castings.....		3 40	1 60	5 00
1 body bolster, new truss rods and castings, when sills are replaced.....		3 40	40	3 80
1 body bolster, same bolster replaced with sills....			40	40
1 " " composite (wood with plates).....		8 25	2 00	10 25
1 " " " when sills are replaced..		8 25	80	9 05
1 body bolster, metal, 1 inch x 8 inches, old castings. No credit.....	480 lbs.	14 40	1 60	16 00
1 body bolster, metal, 1 inch x 8 inches, new castings. No credit.....		16 80	1 60	18 40
1 body bolster, metal, 1 inch x 8 inches, when sills are replaced.....		16 80	40	17 20
1 body bolster, metal, 1 inch x 6 inches, old castings. No credit	362 lbs.	10 86	1 60	12 46
1 body bolster, metal, 1 inch x 6 inches, new castings. No credit		13 26	1 60	14 86
1 pressed steel, Schoen.....	575 "	16 50	1 60	18 10

REPAIRS TO FREIGHT EQUIPMENT.

FLOOR FRAME—CONTINUED.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 end sill under siding	44 feet.	\$ 1 10	\$ 3 00	\$ 4 10
1 " " outside "	54 "	1 35	1 40	2 75
1 " " " " when sills are renewed.....	54 "	1 35	40	1 75
1 " " under " " " " " "	44 "	1 10	60	1 70
1 cross tie timber	34 "	85	40	1 25
1 " " " when sills are removed.....	34 "	85	20	1 05
1 dead wood.....	10 "	25	40	65
1 draft timber for wood bolster.....	22 "	55	1 20	1 75
2 " " same end, for wood bolster.....	44 "	1 10	1 80	2 90
1 draft timber for iron bolster	30 "	75	1 20	1 95
2 " " same end, for iron bolster.....	60 "	1 50	1 80	3 30
1 draft timber for American continuous.....	30 "	75	1 20	1 95
2 " " same end, for American continuous	60 "	1 50	1 80	3 30
1 new floor, complete, box car.....	720 "	18 00	2 50	20 50
1 " " " coal "	720 "	18 00	2 50	20 50
1 " " " flat "	720 "	18 00	2 00	20 00
Repairing floor box car, per foot.....	18 "	45	20	65
" " flat " " " "	18 "	45	10	55

REPAIRS TO FREIGHT EQUIPMENT.

COAL CAR FLOOR FRAME.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 side sill, coal car, 5 in. x 12 in. x 35 ft.....	188 feet.	\$ 4 70	\$ 5 00	\$ 9 70
1 " " " " 5 in. x 14 in. x 35 ft	218 "	5 45	5 00	10 45
1 side plank, coal car, 3 in. x 10½ in. x 34 ft.....	100 "	2 50	1 00	3 50
2 " " " " 3 in. x 10½ in. x 34 ft.....	200 "	5 00	1 50	6 50
3 " " " " 3 in. x 10½ in. x 34 ft.....	300 "	7 50	2 00	9 50
4 " " " " 3 in. x 10½ in. x 34 ft.....	400 "	10 00	2 50	12 50
1 side plank, coal car, 3 in. x 12 in. x 34 ft.....	116 "	2 90	1 00	3 90
2 " " " " 3 in. x 12 in. x 34 ft.....	232 "	5 80	1 50	7 30
3 " " " " 3 in. x 12 in. x 34 ft.....	348 "	8 70	2 00	10 70
Removing and replacing same plank.....			75	75
1 end plank, coal car, 3 in. x 10½ in. x 8 ft. 6 in.	26 "	65	15	80
2 " " " " 3 in. x 10½ in. x 8 ft. 6 in.	52 "	1 30	30	1 60
3 " " " " 3 in. x 10½ in. x 8 ft. 6 in.	78 "	1 95	45	2 40
4 " " " " 3 in. x 10½ in. x 8 ft. 6 in.	104 "	2 60	60	3 20
When plank are equipped with corner irons charge labor extra for each plank.....			10	10
When new bolts are required charge per plank.		35		35
1 end gate, complete, 42 in. wide, old irons.....	104 "	2 60	60	3 20
1 " " " " 36 in. " " "	90 "	2 25	45	2 70
1 " " cross rod, ½ in. x 9 ft.....	18 lbs.	54	10	64
1 side or end stake.....	8 feet.	20	10	30
1 " " " " with new bolts		35	10	45

REPAIRS TO FREIGHT EQUIPMENT.

DRAFT RIGGING.

These prices include credit for scrap.	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 draft timber, old castings and bolts.....		\$ 0 75	\$ 1 20	\$ 1 95
2 " " same end, old castings and bolts....		1 50	1 80	3 30
1 " " new castings, old bolts.....		1 05	1 20	2 25
2 draft timbers, same end, new castings, old bolts.		2 10	1 80	3 90
1 draft timber, new castings and bolts, old straps..		1 77	1 20	2 97
2 draft timbers, same end, new castings and bolts, old straps.....		3 54	1 80	5 34
2 draft timbers, new castings and forgings, follow- ers and spring		4 81	1 80	6 61
1 draft timber, American continuous.....		75	1 20	1 95
2 " " same end, American continuous.....		1 50	1 80	3 30
Replacing draft timber bolts, one end		72	60	1 32
" draw bar or coupler, labor.....			40	40
1 M. C. B. coupler, complete, average		10 00	40	10 40
1 " " knuckle, average.....		2 80		2 80
1 coupler yoke or pocket, average	45 lbs.	1 01	40	1 41
1 " draw stem, "	16 "	36	40	76
1 cast draw bar, average.....	200 "	2 00	40	2 40
1 malleable draw bar, average.....	130 "	3 40	40	3 80
1 follower, average	16 "	36	40	76
1 " guide plate, average	4 "	09	10	19
1 draw rod, American continuous, average	152 "	3 42	40	3 82
1 " key, American continuous, average.....	32 "	72	20	92
1 " lug, average.....	15 "	34	40	74
1 " bolt, average	1 3/4 "	04	10	14
1 " timber bolt	4 1/2 in.	10	20	30
1 draw spring, 6 inches x 6 inches, 2 coil.....	23 lbs.	57	40	97
1 " " 6 " x 8 " 2 "	32 "	80	40	1 20

REPAIRS TO FREIGHT EQUIPMENT.

END OF CAR.

These prices include credit for scrap.	Cost of Material.	Cost of Labor.	Total Cost.
1 corner post.....	\$ 0 40	\$ 0 60	\$ 1 00
1 end post.....	20	60	80
1 " brace.....	20	60	80
1 " plate.....	87	2 40	3 27
1 end siding (painted and trimmed).....	3 50	50	4 00
1 " " patching per running foot.....	40	10	50
1 " lining, complete, 3 feet high.....	75	25	1 00
2 end posts and 2 braces.....	80	1 20	2 00
2 " " 2 " and 2 corner posts.....	1 60	2 00	3 60
2 end posts, 2 braces, 2 corners, belt rail and end plate.....	2 70	3 30	6 00
All posts and braces, siding and lining complete...	6 95	4 05	11 00
All posts and braces, end plate, siding and lining complete.....	7 80	5 20	13 00
1 dead wood.....	25	25	50
1 end sill under siding.....	1 10	3 00	4 10
1 " " and dead wood.....	1 35	3 20	4 55
1 " " " " " carry iron and bolts.....	3 00	3 25	6 25
1 end sill, dead wood, 1 draw timber, old castings and forgings.....	3 75	4 45	8 20
1 end sill, dead wood, 2 draw timbers, old castings and forgings.....	4 50	5 00	9 50
1 end sill, dead wood, 2 draw timbers, new cast- ings, old forgings.....	5 10	5 00	10 10
1 end sill, dead wood, 2 draw timbers, new cast- ings and new forgings.....	7 82	5 00	12 82
1 end sill, draft timbers and attachments, and end of car.....	15 62	10 20	25 82
1 end sill, draft timbers and attachments, and end of car without E plate.....	14 75	9 05	23 80
1 end sill, draft timbers and attachments, and end of car and 1 center sill.....	19 12	15 45	34 57
1 end sill, draft timbers and attachments, and end of car and 2 center sills.....	22 62	16 65	39 27
1 end sill, draft timbers and attachments, and 1 center sill.....	11 32	11 40	22 72
1 end sill, draft timbers and attachments, and 2 center sills.....	14 82	12 60	27 42

NOTE.—Couplers or springs not included in above prices.

REPAIRS TO FREIGHT EQUIPMENT.

MATERIAL IN BODY ABOVE SILLS.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 side plate.....	80 feet.	\$ 2 00	\$ 5 00	\$ 7 00
1 " " spliced, 12-foot splice.....	24 "	60	2 00	2 60
1 end plate.....	35 "	87	2 40	3 27
1 carline.....	16 "	40	60	1 00
1 door post.....	16 "	40	60	1 00
1 corner post.....	16 "	40	60	1 00
1 side post.....	8 "	20	60	80
1 end post.....	8 "	20	60	80
1 side brace.....	12 "	30	60	90
1 end brace.....	8 "	20	60	80
1 section of belt rail, 15 feet.....	15 "	37	38	75
1 " " " " 8 ".....	9 "	23	27	50
1 inside lining, complete sides and ends.....	280 "	7 30	1 70	9 00
1 " " section door to corner, 3 feet high..	56 "	1 46	34	1 80
1 " " one end of car, 3 feet high.....	28 "	75	25	1 00
1 " " " " " 7 " ".....	64 "	1 66	59	2 25
Patching, per board, on side.....	8 "	20	05	25
" " " " end.....	4 "	10	05	15
Siding car, complete, moulding and painting.....	720 "	32 00	4 00	36 00
" one end complete, moulding and painting..	80 "	3 50	50	4 00
" " section door to corner and painting.....	140 "	6 25	75	7 00
" patching, per board.....	4 "	20	05	25
Painting, S. & W. paint, per coat.....		2 00	50	2 50

REPAIRS TO FREIGHT EQUIPMENT.

MATERIAL IN ROOFS ABOVE CARLINES.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 double board roof	800 feet.	\$29 25	\$ 3 75	\$33 00
1 single " " over iron or paper.....	400 "	11 50	2 00	13 50
1 " " " under " " "	360 "	9 50	2 00	11 50
Patching " " per board	2½ "	07	05	12
1 running board and cleats, 24 inch	80 "	2 00	25	2 25
1 ridge clamp, for inside iron roof.....	40 "	1 00	15	1 15
6 roof ribs, for inside iron or paper roof	80 "	2 00	35	2 35
40 sub rafters for " " " "	100 "	2 50	1 00	3 50
20 sheets roof iron, for inside iron		18 00	50	18 50
Paint stock.....		1 00	25	1 25
1 ridge pole	35 "	87	13	1 00
1 purline	18 "	45	10	55
1 side fascia, for iron or paper door to corner.....	16 "	40	30	70
1 end " " " " "	12 "	30	20	50
1 side " double board door to corner.....	8 "	20	20	40
1 end " " " "	4 "	10	10	20

NOTE.—Above prices include paint and nails.

AVERAGE COST OF ROOFS, 35-FOOT CARS.

Including all labor and material above side plates and carlines.

STYLE OF ROOF.	Actual Cost of Lumber.	M. C. B. Cost of Lumber.	Nails and Paint.	Iron, Paper or Tin.	Labor.	Actual Cost.	M. C. B. Cost.
Outside iron roof	\$ 7 00	\$11 00	\$2 50	\$21 00	\$4 50	\$35 00	\$39 00
Inside " "	12 50	17 50	2 25	18 00	4 25	37 00	42 00
Paper roof with air space	19 00	26 50	2 25	10 00	4 25	35 50	43 00
" " without "	13 50	21 00	2 50	10 00	4 00	30 00	37 50
Tin roof	7 00	11 00	4 00	16 00	5 00	32 00	36 00
Double board roof	26 75	22 00	2 50		3 75	33 00	28 25

REPAIRS TO FREIGHT EQUIPMENT.

MATERIAL IN DOORS.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
BATTENED DOOR, BOX CAR.				
Lumber, white pine	66 feet.	\$1 65		
Nails, 8d clinch.....	3 lbs.	09		
Hangers, cast iron.....	12 "	18		
Wrought iron chafe strip and bolts.....	6 "	18		
Door lock, Cleveland		10		
Labor			\$0 75	
				\$2 95
M. C. B. price applied.....				3 50
FRAME DOOR WITH RODS, BOX CAR.				
Lumber, oak.....	35 feet.	87		
Wrought iron, rods and bolts.....	92 lbs.	2 76		
Hangers, cast iron	12 "	18		
Door lock, Cleveland.....		10		
Labor			1 00	
				4 91
M. C. B. price applied				5 00
FRAME DOOR WITH SLATS, STOCK CAR.				
Lumber, oak.....	47 feet.	1 18		
Wrought iron, rods and bolts.....	14 lbs.	42		
Hangers, cast iron.....	12 "	18		
Screws.....	$\frac{1}{4}$ gross	12		
Labor			1 00	
				2 90
M. C. B. price applied.....				4 00
End door battened, price applied				1 75
" " framed, rods, price applied				3 00
Rehanging one side door, labor.....				20
1 door cap	8 feet.	20	10	30
1 " stop.....	4 "	10	10	20

AVERAGE WEIGHTS AND PRICES.

RODS AND BOLTS THAT REQUIRE RENEWALS.

		Weight.	Cost.
1 side brace rod,	$\frac{7}{8}$ inch x 9 feet 3 inches.....	19 lbs.	\$0 57
1 " " "	$\frac{3}{4}$ " x 9 " 3 "	14 "	42
1 side tie rod,	$\frac{7}{8}$ inch x 9 feet.....	18 "	54
1 " " "	$\frac{7}{8}$ " x 8 " 3 inches.....	17 "	51
1 " " "	$\frac{3}{4}$ " x 9 "	13 "	39
1 " " "	$\frac{3}{4}$ " x 8 " 3 inches	12 "	36
1 " " "	$\frac{5}{8}$ " x 9 "	9 "	27
1 " " "	$\frac{5}{8}$ " x 8 " 3 inches	8 "	24
1 cross tie rod,	$\frac{5}{8}$ inch x 8 feet 10 inches.....	9 "	27
1 " " "	$\frac{1}{2}$ " x 8 " 10 "	6 "	18
1 drawbar pocket bolt,	1 inch x 10 inches.....	3 $\frac{1}{2}$ "	10
1 " " " "	$\frac{7}{8}$ " x 10 "	2 $\frac{1}{2}$ "	08
1 draft timber bolt,	$\frac{7}{8}$ inch x 16 inches.....	4 "	12
1 " " " "	$\frac{7}{8}$ " x 17 "	4 $\frac{1}{2}$ "	13
1 " " " "	$\frac{7}{8}$ " x 18 "	4 $\frac{1}{2}$ "	14
1 " " " "	$\frac{7}{8}$ " x 20 "	5 "	15
1 " " " "	$\frac{7}{8}$ " x 22 "	5 $\frac{1}{2}$ "	16
1 draft lug bolt,	$\frac{3}{4}$ inch x 7 inches	1 $\frac{1}{2}$ "	04
1 " " " "	$\frac{3}{4}$ " x 9 "	1 $\frac{3}{4}$ "	05
1 " " " "	$\frac{3}{4}$ " x 10 "	2 "	06
1 " " " "	$\frac{3}{4}$ " x 12 "	2 $\frac{1}{4}$ "	07
1 " " " "	$\frac{3}{4}$ " x 14 "	2 $\frac{1}{2}$ "	08
1 " " " "	$\frac{3}{4}$ " x 16 "	2 $\frac{3}{4}$ "	09

AVERAGE WEIGHTS AND PRICES.

MATERIAL IN BODY.

	Weight.	Cost.
1 body bolster, top bar, 1 in. x 8 in. x 8 ft. 9 in.....	260 lbs.	
bottom bar, 1½ in. x 8 in. x 8 ft. 2 in.....	247 "	
	507 lbs.	\$15 21
1 body bolster, top bar, 1 in. x 8 in. x 8 ft. 9 in.....	260 "	
bottom bar, 1 in. x 8 in. x 8 ft. 2 in.....	220 "	
	480 "	14 40
1 body bolster, top bar, ¾ in. x 8 in. x 8 ft. 9 in.....	226 "	
bottom bar, 1 in. x 8 in. x 8 ft. 2 in.....	220 "	
	446 "	13 38
1 body bolster, top bar, ¾ in. x 8 in. x 8 ft. 9 in.....	195 "	
bottom bar, ¾ in. x 8 in. x 8 ft. 2 in.....	192 "	
	387 "	11 61
1 body bolster, top bar, 1 in. x 6 in. x 8 ft. 9 in.....	194 "	
bottom bar, 1 in. x 6 in. x 8 ft. 2 in.....	165 "	
	359 "	10 77
1 body bolster, top bar, ¾ in. x 6 in. x 8 ft. 9 in.....	170 "	
bottom bar, 1 in. x 6 in. x 8 ft. 2 in.....	165 "	
	335 "	10 05
1 body bolster, pressed steel, Schoen.....	575 "	16 50
1 body bolster, cast steel, S. H. & H.....		
1 body bolster, cast steel, American.....		
2 "Graham" steel followers.....	33 "	1 81
2 "Butler" pockets, malleable, 4 pieces.....	132 "	3 96
4 " followers, cast iron.....	56 "	84

AVERAGE WEIGHTS AND PRICES.

MATERIAL IN BODY.

	Weight.	Cost.
1 truss rod, $1\frac{1}{8}$ inch rd. 36 feet long with turnbuckle	190 lbs	\$5 70
1 " " $1\frac{1}{4}$ " " 36 " " " "	160 "	4 80
1 " " $1\frac{1}{8}$ " " 36 " " " "	130 "	3 90
1 " " 1 " " 36 " " " "	110 "	3 30
1 " " $1\frac{1}{8}$ " " 9 " 10 inches long for body bolster	33 "	99
1 " " 1 " " 9 " 10 " " " " " "	26 "	78
1 " " $\frac{7}{8}$ " " 9 " 10 " " " " " "	19 "	57
1 draft rod, $1\frac{1}{4}$ in. rd. 31 ft. 6 in., American continuous.....	152 "	4 56
1 " " key, 1 in. x 5 in. x 2 ft. 1 in. " "	32 "	96
1 brake mast, $1\frac{1}{8}$ inch rd. x 11 feet 10 inches.....	60 "	1 80
1 " " $1\frac{1}{4}$ " " x 11 " 10 "	50 "	1 50
1 " " $1\frac{1}{4}$ " " x 5 "	21 "	63
1 king bolt, $1\frac{1}{4}$ inch rd. x 2 feet 8 inches.....	21 "	63
1 " " $1\frac{1}{4}$ " " x 2 " 6 "	20 "	60
1 " " $1\frac{1}{4}$ " " x 2 " 2 "	17 "	51
1 " " $1\frac{1}{4}$ " " x 2 "	16 "	48
1 draw spindle, $1\frac{1}{8}$ inch rd. x 1 foot 6 inches.....	18 "	
1 " " $1\frac{1}{4}$ " " x 1 " 4 "	16 "	
1 drawbar pocket, $1\frac{1}{8}$ inches x 4 inches x 1 foot 4 inches	50 "	1 50
1 " " $1\frac{1}{8}$ " " x 4 " x 1 " 2 "	45 "	1 35
1 " " 1 " " x 4 " x 1 " 4 "	45 "	1 35
1 " " 1 " " x 4 " x 1 " 2 "	40 "	1 20
1 follower plate, $1\frac{1}{2}$ inches x 6 inches x 9 inches.....	23 "	69
1 " " $1\frac{1}{4}$ " " x 6 " x 9 "	19 "	57
1 " " 1 " " x 6 " x 9 "	15 "	45
1 " " guide, $\frac{1}{2}$ " " x 2 " x 1 foot 2 inches.....	4 "	12

AVERAGE WEIGHTS AND PRICES.

MATERIAL IN BODY.

			Weight.	Cost.
1 carry iron,	$\frac{3}{4}$ inch x 3 inches x 2 feet.....		15 lbs	\$0 45
1 " "	1 " x 3 " x 2 "		20 "	60
1 " "	1 " x 3 " x 3 "		30 "	90
1 corner iron,	$\frac{3}{8}$ inch x 9 inches x 2 feet 4 inches		26 "	78
1 " "	$\frac{1}{4}$ " x 9 " x 2 " 4 "		17 "	51
1 " "	$\frac{3}{8}$ " x 10 " x 2 "		14 "	42
1 " "	$\frac{1}{4}$ " x 5 " x 1 " 6 inches		6 "	18
1 " "	$\frac{1}{4}$ " x 4 " x 1 " 6 "		5 "	15
1 " "	$\frac{3}{8}$ " x 3 " x 1 " 6 "		6 "	18
1 " "	$\frac{3}{8}$ " x 2 $\frac{1}{2}$ " x 1 " 6 "		5 "	15
1 " "	9 inches, Schoen pressed steel.....			40
2 " " coal sides, 6	" " " " " "			30
2 " " " " 4	" " " " " "			20
1 door track,	$\frac{3}{8}$ inch x 3 inches x 11 feet.....		42 "	1 26
1 " "	$\frac{3}{8}$ " x 2 $\frac{1}{2}$ " x 11 "		35 "	1 05
1 " "	$\frac{3}{8}$ " x 2 " x 11 "		28 "	84
1 " "	$\frac{3}{8}$ " x 2 " x 5 "		13 "	39
1 " "	$\frac{1}{4}$ " x 2 " x 5 "		8 "	24
1 threshold plate,	$\frac{3}{8}$ inch x 4 inches x 5 feet 6 inches		28 "	84
1 " " "	$\frac{1}{4}$ " x 4 " x 5 " 6 "		19 "	57
1 sill step,	$\frac{3}{8}$ inch x 2 $\frac{1}{2}$ inches x 3 feet.....		9 "	27
1 " "	$\frac{3}{8}$ " x 2 " x 3 "		8 "	24
1 grab handle,	$\frac{5}{8}$ inch rd. x 24 inch centers.....		3 "	09
1 " "	$\frac{5}{8}$ " " x 18 " "		2 "	06
1 uncoupling rod, 1-inch rd.....			16 "	48

AVERAGE WEIGHTS AND PRICES.

MATERIAL IN BODY.

	Weight.	Cost.
1 cast iron center plate, wood bolster, 4 holes...	70 lbs	\$1 10
1 " " " " " 2 "	65 "	98
1 " " " " iron " 4 "	64 "	96
1 " " " " " " 2 "	60 "	90
1 malleable " " " " 4 "	47 "	1 41
1 " " " " " " 2 "	35 "	1 05
1 pressed steel center plate.....		
1 cast iron side bearing, wood bolster.....	14 "	21
1 " " " " iron	29 "	44
1 malleable " " " "	15 "	45
1 queen post, cast iron.....	24 "	36
1 " " " "	12 "	18
1 " " malleable.....	10 "	30
1 " " "	5 "	15
1 drawbar, cast iron, American continuous	215 "	3 22
1 " " "	175 "	2 62
1 " malleable, American continuous.....	160 "	4 80
1 " "	105 "	3 15
1 draft lug, cast iron, 3-hole.....	14 "	21
1 " " " " square.....	20 "	30
1 " " malleable.....	8 "	24
1 draft timber key, cast iron.....	5 "	08
1 stake pocket, cast iron, single U-bolt	13 "	20
1 " " " " double U-bolt.....	15 "	22
1 " " malleable " "	8 "	24
1 " " pressed steel, double U-bolt.....	5 "	
1 " " " " single "	4 "	

AVERAGE WEIGHTS AND PRICES.

STANDARD BRAKE RIGGING FOR AIR BRAKES.

	Weight.	Cost.
1 push rod, 1 $\frac{3}{8}$ inch rd. x 2 feet 8 inches.....	22 lbs	\$0 66
1 cylinder rod, $\frac{3}{4}$ " " x 7 " 6 "	26 "	78
2 top rods, $\frac{3}{4}$ " " x 9 " 6 "	59 "	1 77
1 hand rod, $\frac{3}{4}$ " " x 11 " 2 "	24 "	72
1 release rod, $\frac{3}{8}$ " " x 4 " 9 "	2 "	06
1 cylinder lever, 1 inch x 3 $\frac{1}{2}$ inches x 2 feet 11 inches.....	32 "	96
1 reservoir " 1 " x 3 $\frac{1}{2}$ " x 2 " 8 "	28 "	84
1 " fulcrum, $\frac{1}{2}$ " x 2 $\frac{1}{2}$ " x 3 " 4 "	14 "	42
3 lever guides, 1 " rd. x 3 feet 7 $\frac{1}{2}$ inches.....	27 "	81
19 connection pins, 1 $\frac{1}{8}$ inch rd. x 4 $\frac{1}{2}$ inches.....	21 "	63
5 pipe clamps, $\frac{1}{2}$ " x 1 $\frac{1}{2}$ inches.....	9 "	27
2 dummy hangers, $\frac{3}{8}$ " x 2 "	4 "	12
1 set of bolts.....	34 "	1 02
2 live levers, 1 inch x 3 $\frac{3}{4}$ inches x 2 feet 6 inches.....	58 "	1 74
2 dead " 1 " x 3 $\frac{3}{4}$ " x 2 "	44 "	1 32
2 " " guides, $\frac{7}{8}$ " rd. x 2 feet 4 inches	34 "	1 02
2 bottom rods, $\frac{7}{8}$ " " x 5 "	50 "	1 50
8 brake hangers, $\frac{7}{8}$ inch rd. x 1 foot 6 inches.....	52 "	1 56
8 " safety chains, $\frac{1}{2}$ " " x 1 " 6 "	26 "	78
8 " hanger eyes, 1 " "	26 "	78
8 " shoe keys, $\frac{1}{2}$ " x $\frac{7}{8}$ inches x 9 $\frac{1}{2}$ inches.....	8 "	24
8 brake shoes, cast iron.....	160 "	2 40
4 brake beams, metal.....		14 00

AVERAGE WEIGHTS AND PRICES.

OLD STYLE HAND BRAKES.

		Weight	Cost.
BRAKE RIGGING, SINGLE TRUCK.			
1 live lever,	$\frac{5}{8}$ inch x 3 inches x 2 feet 11 inches.....	15 lbs.	\$0 45
1 dead lever,	$\frac{5}{8}$ " x 3 " x 2 " 11 "	15 "	45
1 bottom rod,	$\frac{3}{4}$ " rd. x 7 " 3 "	15 "	45
1 top rod,	$\frac{5}{8}$ " rd. x 7 " 3 "	9 "	27
BRAKE RIGGING, DOUBLE TRUCKS.			
2 live levers,	$\frac{5}{8}$ inch x 3 inches x 2 feet 11 inches.....	30 "	90
2 dead levers,	$\frac{5}{8}$ " x 3 " x 2 " 11 "	30 "	90
2 bottom rods,	$\frac{3}{4}$ " rd. x 7 " 3 "	30 "	90
1 top rod,	$\frac{3}{4}$ " rd. x 20 " 0 "	22 "	66
1 top rod,	$\frac{5}{8}$ " rd. x 7 " 3 "	9 "	27
1 equalizing lever,	$\frac{5}{8}$ " x 2 $\frac{1}{2}$ " x 17 $\frac{1}{2}$ "	7 "	21

NOTE.—Many of the old cars, equipped with hand brakes, have no dead levers, bottom rod extends through one brake beam. Weight of material about the same.

COST OF ONE PLAIN WOOD BRAKE BEAM COMPLETE.

1 brake beam,	oak,	3 $\frac{1}{2}$ in. x 7 in. x 5 ft. 11 in.	14 lbs.	\$0 35
1 " fulcrum,	wrought iron,	$\frac{5}{8}$ " x 2 $\frac{1}{2}$ " x 1 " 10 "	7 "	21
2 " beam guides,	" "	$\frac{1}{8}$ " rd. x 1 " 2 "	4 "	12
2 " " hook bolts,	" "	$\frac{5}{8}$ " " x 10 $\frac{1}{2}$ "	2 "	06
2 " head bolts,	" "	$\frac{3}{4}$ " " x 6 "	2 $\frac{1}{2}$ "	07
2 " heads,	cast iron.....		40 "	60
3 " shoes,	" "		40 "	60
Labor fitting up brake beam.....				15
				\$2 16
Add 10 per cent.....				22
				\$2 38

COST OF STANDARD AIR BRAKES.

APPLIED TO CAR.

Westinghouse automatic equipment, schedule H 1.....	\$36 00
Train pipe, 1½ inches x 38 feet.....	1 50
Pressure pipe, ¾ " " x 27 "	50
Ells and unions.....	40
Cylinder blocks, oak	20
Body forgings, brakes hung to body	12 42
Truck "	5 58
Brake beams, metal.....	14 00
" shoes	2 40
Labor applying brakes to car	5 00
	<hr/>
	\$78 00

COST OF ONE WOOD TRUSSED BRAKE BEAM, COMPLETE.

1 brake beam, oak,	3½ in. x 7 in. x 5 ft. 11 in.....	14 feet.	\$0 35
1 " fulcrum, wrought iron,	¾ in. x 2½ in. x 1 ft. 10 in.....	9 lbs.	27
2 " truss rods,	¾ in. rd. x 6 ft. 4½ in.....	12 "	36
2 " guides,	¾ in. rd. x 1 ft. 2 in.....	4 "	12
2 " hook bolts,	¾ in. rd. x 10½ in.....	2 "	06
2 " head "	¾ in. rd. x 6 in.....	2½ "	07
2 brake beam washers, cast iron	10 "	15	
1 truss rod saddle, cast iron.....	8 "	12	
2 brake heads, " "	40 "	60	
2 " shoes, " "	40 "	60	
Labor fitting up brake beam.....		25	
			<hr/>
			\$2 95
Add 10 per cent.....			29
			<hr/>
			\$3 24

WESTINGHOUSE FREIGHT CAR BRAKE EQUIPMENT.

REPAIR PRICES.

STANDARD COMBINED CYLINDER AND RESERVOIR, PLATE F 40.

Equipment for car complete, schedule H 1.....		\$40 00
Cylinder, reservoir and triple valve, complete, plate F 40, No. 1.....		26 50
Cylinder body, " " 40, " 2.....		3 00
Piston head and rod, " " 40, " 3.....		2 00
Back head, " " 40, " 4.....		1 00
Release spring, " " 40, " 9.....		1 00
Reservoir, " " 40, " 10.....		3 35
Triple valve complete, plate F 36, No. 1.....		15 00
Triple valve body, " " 36, " 2.....		5 50
Slide valve for triple valve, " " 36, " 3.....		1 00
Piston " " " " " 36, " 4.....		2 00
Drain cup " " " " " 36, " 19.....		75
Hose and coupling, 1½-inch complete, each, plate F 43, No. 1.....		2 12
Coupling, standard 1½ " each, " " 43, " 2.....		75
Hose, " 1½ " " " " 43, " 3.....		1 25
Nipple, " 1½ " " " " 43, " 4.....		15
Angle cock, " 1½ " complete, each, " " 43, " 6.....		2 00
" " body, each, " " 43, " 6.....		1 10
" " key, " " " 43, " 6.....		50
Cut-out cock, 1½-inch complete, plate F 43, No. 7.....		1 50
Drain cup, 1½ " " " 43, " 9.....		1 25
Drain cup body, " " 43, " 9.....		80
Release valve complete, " " 43, " 10.....		1 00
Pressure retaining valve, " " 43, " 11.....		1 25

WESTINGHOUSE FREIGHT CAR BRAKE EQUIPMENT.

REPAIR PRICES.

SPECIAL DETACHED CYLINDER AND RESERVOIR, PLATE F 41.

Equipment for car complete, schedule H 2.....	\$40 00
Cylinder, reservoir and triple valve, complete, plate F 41.....	26 50
Cylinder, complete, " " 41, No. 1.....	9 00
Cylinder body, " " 41, " 2.....	3 00
Piston head and rod, " " 41, " 3.....	2 00
Back head, " " 41, " 4.....	1 00
Front head, " " 41, " 12.....	65
Auxiliary reservoir, " " 41, " 13.....	3 70
Triple valve, complete, plate F 36, No. 1.....	15 00
" " body, " " 36, " 2.....	5 50
Hose and coupling, 1½-inch, complete, each	2 12
Standard hose, 1½ " "	1 25
" " 1 " "	1 00
" coupling, 1½ " "	75
Angle cock, 1½-inch, each.....	2 00
" " body.....	1 10
" " key	50
" " handle.....	10
Cut-out cock, 1½-inch, complete, each	1 50
" " body.....	70
" " key	50
Drain cup, complete.....	1 25
Release valve, complete.....	1 00
Pressure retaining valve, complete	1 25
One air hose coupling.....	80

WESTINGHOUSE FREIGHT CAR BRAKE EQUIPMENT.

REPAIR PRICES.

	Cost of Material.	Cost of Labor.	Total Cost.
Angle cock, renewing.....	\$ 2 00	\$ 0 05	\$ 2 05
“ “ handle, “	10	05	15
Coupling dummy, “	10	05	15
Cut-out cock, “	1 50	15	1 65
“ “ handle, “	08	05	13
Reservoir, “	3 35	25	3 60
Cylinder body, “	3 00	25	3 25
“ release spring, “	1 00	10	1 10
“ gasket, “	06	20	26
Check valve case, “	90	10	1 00
“ “ “ gasket, “	08	10	18
Coupling gasket, “	04	03	07
Pipe, one section, 16 feet, renewing.....	64	10	74
“ securing to body		10	10
Piston, renewing.....	2 00	10	2 10
“ packing leather, “	40	15	55
Pressure retaining valve, repairing.....		15	15
Release valve, “		10	10
“ “ rod, “		10	10
Strainer, renewing.....	10	05	15
Triple valve gasket, “	12	10	22
Triple slide valve, repairing		40	40
“ emergency valve seat, repairing.....		10	10
Triple valve, cleaning and oiling.....		10	10
Cylinder “ “ “		15	15

REPAIRS TO FREIGHT TRUCKS.

BOLSTERS AND SPRING PLANK.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 truck bolster, oak, 9 in. x 14 in. x 7 ft. 6 in.....	80 in.	\$2 00	\$2 00	\$4 00
1 " " " 10 in. x 12 in. x 7 ft. 6 in.....	82 feet.	2 05	2 00	4 05
1 " " " 9 in. x 12 in. x 7 ft. 6 in.....	74 "	1 85	2 00	3 85
1 " " " 9 in. x 12 in. x 5 ft. 4 in.....	53 "	1 32	2 00	3 32
1 " " " 8 in. x 12 in. x 5 ft. 4 in.....	47 "	1 17	2 00	3 17
Above prices do not include truss rods or castings, center or side bearings.				
1 truck bolster pressed steel, 7 ft. 6 in., Schoen.....	575 lbs.	16 50	2 00	18 50
1 " " cast " 7 ft. 6 in., American.	587 "		2 00	
1 " " " " 7 ft. 6 in., S. H. & H.			2 00	
1 truck transom, oak, 5 in. x 14 in. x 7 ft. 6 in.....	46 feet.	1 15	2 00	3 15
1 " " " 5 in. x 12 in. x 7 ft. 6 in.....	41 "	1 02	2 00	3 02
1 truck transom, channel, $\frac{1}{2}$ in. x $10\frac{1}{2}$ in. x 6 ft. 7 in.	142 lbs.	4 26	3 00	7 26
1 " " " $\frac{3}{8}$ in. x $10\frac{1}{2}$ in. x 6 ft. 7 in.	130 "	3 90	3 00	6 90
1 spring plank, oak, 5 in. x 14 in. x 7 ft. 6 in.....	46 feet.	1 15	2 00	3 15
1 " " " 5 in. x 12 in. x 7 ft. 6 in.....	41 "	1 02	2 00	3 02
1 " " " 3 in. x 12 in. x 5 ft. 4 in.....	18 "	45	2 00	2 45
1 spring plank, channel, $\frac{1}{2}$ in. x 13 in. x 4 in. x 7 ft..	255 lbs.	7 65	2 00	9 65
1 " " " $\frac{1}{2}$ in. x 12 in. x 3 in. x 7 ft..	210 "	6 30	2 00	8 30
1 " " " $\frac{3}{8}$ in. x 12 in. x 3 in. x 7 ft..	150 "	4 50	2 00	6 50
1 " " angle, $\frac{3}{8}$ in. x 3 in. x 4 in. x 7 ft..	95 "	2 85	1 00	3 85
1 " " and 1 bolster in same truck	126 feet.	3 15	2 40	5 55
1 truck bolster truss rod, $1\frac{1}{8}$ in. x 8 ft. 4 in.....	27 lbs.	81	20	1 01
1 " " " " 1 in. x 8 ft.....	21 "	63	20	83
1 " " " plate, 1 in. x 3 in. x 1 ft. 6 in.	15 "	45	10	55
1 " " " " 1 in. x 3 x 1 ft	10 "	30	10	40

REPAIRS TO FREIGHT TRUCKS.

ARCH BARS.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 arch bar, 1 inches x 3 inches x 6 feet 10 inches..	69 lbs.	\$2 07	\$0 60	\$ 267
1 " " 1 " x 3 " x 6 " 4 " ..	64 "	1 92	60	2 52
1 " " 1½ " x 3 " x 6 " 4 " ..	72 "	2 16	60	2 76
1 " " 1½ " x 3 " x 6 " 4 " ..	80 "	2 40	60	3 00
1 arch bar, 1 inches x 3½ inches x 6 feet 10 inches	80 "	2 40	60	3 00
1 " " 1 " x 3½ " x 6 " 4 " ..	74 "	2 22	60	2 82
1 " " 1½ " x 3½ " x 6 " 4 " ..	84 "	2 52	60	3 12
1 arch bar, 1 inches x 4 inches x 6 feet 10 inches	92 "	2 76	60	3 36
1 " " 1½ " x 4 " x 6 " 10 " ..	102 "	3 06	60	3 66
1 " " 1½ " x 4 " x 6 " 4 " ..	96 "	2 88	60	3 48
1 " " 1½ " x 4 " x 6 " 4 " ..	107 "	3 21	60	3 81
1 or 2 arch bars on same side of truck.....			60	60
Blacksmith labor repairing 1 arch bar.....			40	40
1 tie bar, ½ inch x 3 inches x 6 feet	30 "	90	10	1 00
1 " " ½ " x 3 " x 6 "	38 "	1 14	10	1 24
1 " " ½ " x 3½ " x 6 "	35 "	1 05	10	1 15
1 " " ½ " x 3½ " x 6 "	44 "	1 32	10	1 42
1 " " ½ " x 4 " x 6 "	40 "	1 20	10	1 30
1 " " ½ " x 4 " x 6 "	50 "	1 50	10	1 60
1 M. C. B. axle, 4½ inch x 8 inch journal	465 "	9 50	50	10 00
1 M. C. B. " 4 " x 7 " "	385 "	7 50	50	8 00

NOTE.—Above prices do not include credit for scrap.
For scrap, credit ¾c per pound.

REPAIRS TO FREIGHT TRUCKS.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 oil box, 40,000 pounds capacity, cast iron.....	78 lbs.	\$1 17	\$0 40	\$1 57
1 " " 60,000 " " "	90 "	1 35	40	1 75
1 " " 60,000 " " malleable iron.....	50 "	1 50	40	1 90
2 " " 60,000 " " on same axle.....	180 "	2 70	60	3 30
1 oil box cover, malleable.....		15	10	25
1 " " " pressed steel.....		15	10	25
1 oil box wedge, malleable	7 "	21	10	31
1 M. C. B. bearing, solid, 4½ inches x 8 inches.....	12 "	1 32		1 32
1 " " " " 4 " x 7 "	10 "	1 10		1 10
1 " " " " filled, 4½ " x 8 "	12 "	96		96
1 " " " " 4 " x 8 "	10 "	80		80
1 bolster spring, 7 inches high, Penn. W.....	60 "		40	
1 " " 6 " " " V.....	51 "		40	
1 column, double bolt, cast iron	70 "	1 05	40	1 45
1 " single " " "	20 "	30	40	70
1 " double " malleable.....	30 "	90	40	1 30
1 " single " "	18 "	54	40	94
1 column guide, double bolt, cast iron.....	22 "	33	20	53
1 " " single " " "	6 "	09	20	29
1 column bolt, 1 inch	6 "	18	40	58
1 or more column bolts replaced in same truck....			40	
1 center plate, cast iron, average.....	72 "	1 08	60	1 68
1 " " malleable, "	35 "	1 05	60	1 65
1 or more center plate bolts, replaced.....			60	

REPAIRS TO FREIGHT TRUCKS.

	Amount of Material.	Cost of Mate'l.	Cost of Labor.	Total Cost.
1 side bearing, cast iron.....	17 lbs.	\$0 25	\$0 20	\$0 45
1 " " malleable	10 "	30	20	50
1 transom end casting	140 "	2 10	2 00	4 10
1 channel bar end casting.....	79 "	1 19	3 00	4 19
1 " " " " malleable.....	70 "	2 10	3 00	5 10
1 brake head, cast iron, for wood beam.....	20 "	30	20	50
1 " " malleable " " "	9 "	27	20	47
1 " shoe, cast iron	20 "	30	10	40
1 brake hanger, $\frac{7}{8}$ inch loop outside brake	10 "	30	10	40
1 " " $\frac{7}{8}$ " " inside "	4 "	12	10	22
1 " " 1 " hook, outside "	6 "	18	10	28
1 " " 1 " " inside "	4 "	12	10	22
1 " " Y and hook, outside "	7 "	21	10	31
1 brake safety hanger, $\frac{1}{2}$ inch loop	5 "	15	10	25
1 bolster hanger, $\frac{3}{4}$ in. x 3 in. x 6 ft.....	45 "	1 35	40	1 75
1 " " $\frac{3}{4}$ " x 3 " x 1 ft. 10 in.....	17 "	51	20	71
1 " " $\frac{3}{4}$ " x 1 $\frac{1}{2}$ " x 1 ft. 10 in., loop..	14 "	42	20	62
1 bolster hanger pin, 1 $\frac{1}{2}$ in. x 3 in. x 1 ft. 6 in....	20 "	60	20	80
1 " " " 1 $\frac{1}{2}$ in. x 1 $\frac{1}{2}$ in. x 1 ft. 8 in.....	18 "	54	20	74
1 " " " 2 -in. rd. x 2 feet	21 "	63	20	83
1 metal brake beam, heads and shoes		3 50	40	3 90
1 wood " " trussed heads and shoes		3 24	40	3 64
1 " " " plain " " "		2 38	40	2 78
1 Bissell stop wedge, wrought iron.....	13 "	1 75	10	1 85
1 " " " cast steel.....	15 "	80	10	90

WHEELS AND AXLES.

MASTER CAR BUILDERS' PRICES.

	New.	Second-Hand.	Scrap.
One 36-inch wheel	\$ 8 00	\$6 00	\$4 00
One 33-inch wheel	6 50	5 00	3 00
One 30-inch wheel	5 50	3 00	2 50
One axle, 60,000 lbs. capacity	10 00	6 00	4 00
One axle, 40,000 lbs. or less	8 00	5 00	3 50

\$1.50 additional for all labor for each pair of wheels and axles removed from truck.

PROPER CHARGES AND CREDITS, INCLUDING \$1.50 EXTRA FOR LABOR.

CHARGE.		CREDIT.	Total Charge.
2 new 33 in. wheels, 1 new 60,000 lb. axle.		2 scrap wheels and scrap axle	\$14 50
2 " 33 " " 1 " 60,000 " "		1 scrap and 1 second-hand wheel and scrap axle	12 50
2 " 33 " " 1 " 60,000 " "		2 scrap wheels and second-hand axle	12 50
2 " 33 " " 1 " 60,000 " "		1 scrap and 1 second-hand wheel and second-hand axle	10 50
2 " 33 " " 1 " 40,000 " "		2 second-hand wheels and scrap axle	10 50
2 " 33 " " 1 " 60,000 " "		2 second-hand wheels and second-hand axle	8 50
2 new 33 in. wheels, 1 second-hand 60,000 lb. axle.		2 scrap wheels and scrap axle	10 50
2 " 33 " " 1 " 60,000 " "		1 scrap and 1 second-hand wheel and scrap axle	8 50
2 " 33 " " 1 " 60,000 " "		2 scrap wheels and second-hand axle	8 50
2 " 33 " " 1 " 60,000 " "		1 scrap and 1 second-hand wheel, second-hand axle ..	6 50
2 " 33 " " 1 " 60,000 " "		2 second-hand wheels and scrap axle	6 50
2 " 33 " " 1 " 60,000 " "		2 second-hand wheels and second-hand axle	4 50
Charge for truing up 1 journal			\$0 25
" " 2 "			50

WHEELS AND AXLES.

MASTER CAR BUILDERS' PRICES.

CHARGE.		CREDIT.		Total Charge.
2 new 33 in. wheels,	1 new 40,000 lb. axle.	2 scrap wheels and scrap axle.....	\$13 00	
2 " 33 " "	1 " 40,000 " "	1 scrap and 1 second-hand wheel and scrap axle.....	11 00	
2 " 33 " "	1 " 40,000 " "	2 scrap wheels and second-hand axle	11 50	
2 " 33 " "	1 " 40,000 " "	1 scrap and second-hand wheel and second-hand axle..	9 50	
2 " 33 " "	1 " 40,000 " "	2 second-hand wheels and scrap axle	9 00	
2 " 33 " "	1 " 40,000 " "	2 second-hand wheels and second-hand axle	7 50	
2 new 33 in. wheels,	1 second-hand 40,000 lb. axle.	2 scrap wheels and scrap axle	10 00	
2 " 33 " "	1 " 40,000 " "	1 scrap and 1 second-hand wheel and scrap axle.....	8 00	
2 " 33 " "	1 " 40,000 " "	2 scrap wheels and second-hand axle	8 50	
2 " 33 " "	1 " 40,000 " "	1 scrap and 1 second-hand wheel, second-hand axle..	6 50	
2 " 33 " "	1 " 40,000 " "	2 second-hand wheels and scrap axle	6 00	
2 " 33 " "	1 " 40,000 " "	2 second-hand wheels and second-hand axle.....	4 50	
2 new 33 in. wheels on same axle.		2 scrap wheels.....	8 50	
2 " 33 " "	" " "	1 scrap and 1 second-hand wheel	6 50	
2 " 33 " "	" " "	2 second-hand wheels.....	4 50	
2 second-hand 33 in. wheels on same axle.		2 scrap wheels.....	5 50	
2 " 33 " "	" " "	1 scrap and 1 second-hand wheel.....	3 50	
2 " 33 " "	" " "	2 second-hand wheels.....	1 50	

CONTRACT PRICES FOR LABOR.		NEW WORK.—		REPAIR WORK.
		Steel.	Iron.	
Turning axles.....	each,	22 cents.	18 cents.	
Boring wheels.....	per pair,	3 "	3 "	3 cents.
Pressing on wheels.....		5 "	5 "	5 "
General labor, handling, etc.....		5 "	4 "	4 "
Pressing off old wheels.....				5 "
Fitting up old axle.....				8 "
Total cost.....	per pair,	35 "	30 "	25 "

SETTLEMENT PRICES FOR CARS DESTROYED.

MASTER CAR BUILDERS' CODE OF RULES.

The settlement prices of new eight-wheel cars, as follows, with an addition of \$36.00 for each car equipped with air brakes.

BODIES—WOOD OR IRON.

Box car, eight wheel, 36 feet long or over, but under 40 feet	\$325 00
“ “ “ “ 34 “ “ “ “ “ 36 “	300 00
“ “ “ “ 32 “ “ “ “ “ 34 “	275 00
“ “ “ “ under 32 feet long.....	240 00
Flat car, eight wheel, plain, 32 feet long or over	125 00
“ “ “ “ “ under 32 feet long	100 00
Gondola, eight wheel, drop bottom, 30 tons or over.....	275 00
“ “ “ “ “ 25 “ “	250 00
“ “ “ “ “ 20 “ “	220 00
“ “ “ “ “ 15 “ or less	180 00
Gondola, eight wheel, hopper bottom, 30 tons or over.....	300 10
“ “ “ “ “ 25 “ “	275 00
“ “ “ “ “ 20 “ “	240 00
“ “ “ “ “ 15 “ “	200 00
Gondola, eight wheel, plain, 32 feet long or over	150 00
“ “ “ “ “ under 32 feet long	125 00
Stock car, eight wheel, 34 feet long or over.....	300 00
“ “ “ “ 32 feet long or over, but under 34 feet.....	275 00
“ “ “ “ under 32 feet long.....	240 00

NOTE.—The lengths of cars refer to the lengths over end sills.

When cars of 60,000 pounds capacity or over, and so stenciled, have trucks with journals 4 inches or over in diameter when new, \$25.00 per car shall be added to the figures as given above for the values of car bodies.

SETTLEMENT PRICES FOR CARS DESTROYED.

MASTER CAR BUILDERS' CODE OF RULES.

TRUCKS.

With wood transoms, one pair, including brake beams complete, truck levers and connection rods	\$200 00
With metal transoms, one pair, including brake beams complete, truck levers and connection rods	250 00

FOUR-WHEEL CARS.

Coal car, ordinary, complete.....	200 00
Box car, complete	230 00
Gondola car, drop bottom, complete	300 00

RULE 5, SEC. 20, M. C. B. CODE, 1897.

Depreciation due to age shall be estimated at six per cent per annum upon the yearly depreciated value of the bodies and trucks only; provided, however, that allowances for depreciation shall in no case exceed sixty per cent of the value new.

The amount \$36.00 for air brakes shall not be subject to any depreciation.

RULE 5, SEC. 21, M. C. B. CODE, 1897.

Refrigerator cars, special stock cars and other freight cars, designed for special purposes not referred to above, shall be settled for at the present cost price, as may be agreed to by the parties in interest, less the depreciation due to age, which shall be on the same basis as for regular freight equipment.

SETTLEMENT PRICES FOR CARS DESTROYED.

TABLE SHOWING THE DEPRECIATED VALUE OF \$100.00 AT SIX PER CENT.

Months.		1	2	3	4	5	6	7	8	9	10	11	
Years	99.50	99.00	98.50	98.00	97.50	97.00	96.50	96.00	95.50	95.00	94.50	Years
1	94.00	93.53	93.06	92.59	92.12	91.65	91.18	90.71	90.24	89.77	89.30	88.83	1
2	88.36	87.92	87.48	87.03	86.59	86.15	85.71	85.27	84.83	84.38	83.94	83.50	2
3	83.06	82.64	82.23	81.81	81.40	80.98	80.57	80.15	79.74	79.32	78.91	78.49	3
4	78.07	77.64	77.30	76.91	76.52	76.13	75.73	75.34	74.95	74.56	74.17	73.78	4
5	73.40	73.03	72.66	72.29	71.92	71.56	71.19	70.82	70.45	70.09	69.72	69.36	5
6	68.99	68.65	68.30	67.95	67.61	67.27	66.92	66.58	66.23	65.89	65.54	65.20	6
7	64.85	64.53	64.20	63.88	63.55	63.23	62.91	62.58	62.26	61.93	61.61	61.28	7
8	60.96	60.66	60.35	60.05	59.74	59.43	59.13	58.82	58.52	58.22	57.91	57.61	8
9	57.30	57.01	56.73	56.44	56.15	55.87	55.58	55.30	55.05	54.72	54.43	54.15	9
10	53.86	53.59	53.33	53.07	52.79	52.52	52.25	51.68	51.71	51.44	51.17	50.90	10
11	50.63	50.38	50.13	49.87	49.62	49.37	49.11	48.86	48.61	48.35	48.10	47.85	11
12	47.60	47.36	47.12	46.88	46.64	46.40	46.17	45.93	45.69	45.45	45.21	44.98	12
13	44.74	44.51	44.29	44.07	43.84	43.62	43.40	43.17	42.95	42.72	42.50	42.28	13
14	42.06	41.84	41.63	41.42	41.21	41.00	40.79	40.58	40.37	40.16	39.95	14
Months.		1	2	3	4	5	6	7	8	9	10	11	

To ascertain the depreciated value of a car, multiply the amount shown in the table for the age of the car, by the original value of the car, and point off four places of decimals.

EXAMPLE.

Age of car, 12 years 9 months. Original value, \$300.00.

Depreciation for 12 years 9 months (as per table), \$45.45.

\$45.45 X 300 = 13635.00; move decimal point = \$136.35.

Depreciated value, \$136.35.

STANDARD M. C. B. COUPLERS.

WEIGHTS AND PRICES.

NAME OF COUPLER.	MATERIAL.		WEIGHT.		M. C. B. PRICES, 1897.		
	Coupler.	Knuckle.	Coupler.	Knuckle.	Complete	Skeleton	Knuckle.
American	Steel	Steel	161 lbs	52 lbs.	\$11 00	\$6 75	\$3 00
Buckeye	Mall.	"	156 "	49 "	9 00	6 00	2 50
California	Steel	"	168 "	33 "	11 25	7 00	3 50
Chicago	"	"	154 "	50 "	11 00	7 50	3 50
Drexel	"	"	143 "	52 "	10 50	5 50	4 00
Gould	Mall.	"	159 "	37 "	12 50	8 35	2 80
Hinson.....	"	"	156 "	55 "	10 00	6 00	3 50
Janney.....	"	Wro't & Steel	175 "	36 "	10 00	6 25	3 25
Mo. Pacific	Steel	Steel	170 "	50 "	9 00	5 50	2 50
S. H. & H	"	"	147 "	50 "	10 00	6 50	3 50
Standard	Mall.	"	142 "	66 "	12 50	7 25	4 25
St. Louis	Steel	"	143 "	53 "	10 25	5 75	4 00
Thurmond	Mall.	"	154 "	48 "	10 00	6 00	2 50
Tower.....	"	"	156 "	48 "	9 75	6 00	3 00
Trojan	"	"	159 "	53 "	12 50	7 25	4 00

The Buckeye and Janney couplers, Buckeye steel knuckles, and Janney wrought iron knuckles will be replaced as follows: Couplers (skeleton), \$4.00 each. Knuckles, \$1.00 each.

RULE 5, SEC. 11, M. C. B. CODE, 1897.

M. C. B. couplers, or parts of same, to be charged at manufacturer's current market prices, or replacement prices, which are to be quoted by the secretary September 1 and March 1 of each year.

When the coupler manufacturers do not quote a replacement price, and do not require the return of the scrap for the price quoted, the credit for scrap shall be allowed at the rates given in M. C. B. schedule of prices and credits, Rule 5, Section 10.



USEFUL INFORMATION.

Tables of Weights and Measures.

**Weights of Bar, Plate and Sheet Iron, Galvanized
Iron and Tin, Bolts, Nuts, Nails and Tacks.**

Capacities of Tanks and Cisterns.

Weights of Logs, Lumber and Various Substances.

Weights, Sizes and Capacities of Helical Springs.

Areas and Circumferences of Circles.

Tables of Board Measure, Etc.

Detail Bills of Material of Freight Cars.

WEIGHTS AND MEASURES.**TROY WEIGHT.**

Pounds.	Ounces.	Pennyweights.	Grains.
1.	12.	240.	5760.
0.08333	1.	20.	480.
	0.05	1.	24.
		0.0416	1.

Troy weight is used for weighing gold and silver.

The grain is the same in Avoirdupois, Troy and Apothecaries' weights.

A carat, used in weighing diamonds = 3.168 grains.

APOTHECARIES' WEIGHT.

Pounds.	Ounces.	Drachms.	Scruples.	Grains.
1.	12.	96.	288.	5760.
0.08333	1.	8.	24.	480.
	0.0125	1.	3.	60.
		0.0333	1.	20.
			0.05	1.

APOTHECARIES' FLUID MEASURE.

60 minims = 1 fluid drachm.

8 drachms or 437.5 grains or 1.732 cubic inches = 1 fluid ounce.

12 ounces = 1 fluid pint.

WEIGHTS AND MEASURES.**AVOIRDUPOIS OR ORDINARY COMMERCIAL WEIGHT.**

Tons.	Cwts.	Pounds.	Ounces.
1.	20.	2240.	35840.
0.050	1.	112.	1792.
	0.0089	1.	16.
		0.0625	1.

16 drachms or 437.5 grains = 1 ounce.

1 pound = 27.7 cubic inches of distilled water at its maximum density (39° Fahrenheit).

A stone is 14 pounds; a quintal is 100 pounds.

LONG MEASURE.

Miles.	Rods.	Yards.	Feet.	Inches.
1.	320.	1760.	5280.	63360.
0.003125	1.	5.	16.5	198.
0.000568	0.1818	1.1	3.	36.
0.0001894	0.0606	0.3333	1.	12.
0.0000158	0.005051	0.02778	0.08333	1.

The British measures are shorter than those of the United States by about 1 part in 17230 or 3.677 inches in a mile.

A palm is 3 inches.

A hand is 4 inches.

A span is $10\frac{1}{2}$ inches.

A fathom is 6 feet.

A cable's length is 120 fathoms.

A gunter's or surveyor's chain is 66 feet or 4 rods long, and is divided into 100 links of 7.92 inches in length; 80 chains making a mile.

WEIGHTS AND MEASURES.

SQUARE OR LAND MEASURE.

Sq. Miles.	Acres.	Sq. Rods.	Sq. Yards.	Sq. Feet.	Sq. Inches.
1.	640.	102400.	3097600.	27878400.	
	1.	160.	4840.	43560.	6272640.
		1.	30.25	272.25	39204.
		0.0331	1.	9.	1296.
			0.111	1.	144.
				0.00694	1.

Acres $\times .0015625$ = square miles.

Square yards $\times .000000325$ = square miles.

Acres $\times .4840$ = square yards.

Square yards $\times .0002066$ = acres.

A section of land is 1 mile square and contains 640 acres.

A square acre is 208.71 feet at each side; or 220 x 198 feet.

A square $\frac{1}{2}$ acre is 147.58 feet at each side; or 110 x 198 feet.

A square $\frac{1}{4}$ acre is 104.355 feet at each side; or 55 x 198 feet.

LIQUID MEASURE.

This measure is founded on the old British wine gallon which contains 231 cubic inches of distilled water at a temperature of 39.85° Fahrenheit.

4 gills = 1 pint.

2 pints = 1 quart.

4 quarts = 1 gallon.

31 $\frac{1}{2}$ gallons = 1 barrel.

2 barrels = 1 hogshead.

2 hogsheads = 1 pipe or butt.

2 pipes = 1 tun.

A puncheon is 84 gallons.

A tierce is 42 gallons.

WEIGHTS AND MEASURES.

DRY MEASURE.

UNITED STATES ONLY.

Struck Bush.	Pecks.	Gallons.	Quarts.	Pints.	Cubic Inches.
1.	4.	8.	32.	64.	2150.
	1.	2.	8.	16.	537.6
		0.25	1.	2.	67.2
		0.125	0.5	1.	33.6
		1.	4.	8.	268.8

A gallon of liquid measure = 231 cubic inches.

A heaped bushel = $1\frac{1}{4}$ struck bushels.

The cone in a heaped bushel must be not less than 6 inches high.

A struck bushel = 1.2445 cubic feet.

A barrel of United States hydraulic cement = 300 to 310 lbs. usually.

A barrel of genuine Portland cement = 425 lbs.

To reduce United States dry measure to British imperial, divide by 1.032.

CUBIC OR SOLID MEASURE.

1728 cubic inches = 1 cubic foot. 27 cubic feet = 1 cubic yard.

A cord of wood = 4 feet \times 4 feet \times 8 feet = 128 cubic feet.

A perch of masonry = 16.5 feet \times 1.5 feet \times 1 foot = 24.75 cubic feet, but is generally assumed to be 25 cubic feet.

NAUTICAL MEASURE.

A nautical or sea mile (a knot) is the length of a minute of longitude of the earth at the equator at the level of the sea. It is assumed = 6086.07 feet or 1.152664 statute or land miles by the United States Coast Survey.

3 nautical miles = 1 league.

WEIGHTS AND MEASURES.

MEASURES OF LENGTH.

FRENCH.	BRITISH.			
	Inches.	Feet.	Yards.	Miles.
Millimetre.	.039368	.00328		
Centimetre.	.39368	.03280		
Decimetre.	3.9368	.32807	.109357	
Metre.	39.368	3.2807	1.09357	
Decametre.	393.68	32.807	10.9357	
Hectometre.		328.07	109.357	.0621346
Kilometre.		3280.7	1093.57	.621346
Myriametre.		32807.	10935.7	6.21346

U. S.	French.	U. S.	French.
1 inch =	.0254 metres.	1 yard =	.9144 metres.
1 foot =	.30479 "	1 mile =	160.931 "

Circumference of a circle = diameter \times 3.1416.

Diameter of a circle = circumference \times 0.3183.

Side of square of equal periphery as circle = diameter \times 0.7854.

Diameter of circle of equal periphery as square = side \times 1.2732.

Side of an inscribed square = diameter of circle \times 0.7071.

Length of arc = number of degrees \times diameter \times 0.008727.

CAPACITY OF BOXES.

4 inches x	4 inches x	4½ inches =	1 quart.
8 "	x 8 "	x 8½ "	= 1 peck.
8 "	x 15½ "	x 26 "	= 1 bushel.
16 "	x 24 "	x 28 "	= 1 barrel.

USEFUL MULTIPLIERS FOR RAPID APPROXIMATION.

Feet,	×	.00019	= miles.
Yards,	×	.0006	= miles.
Square inches,	×	.007	= square feet.
Square feet,	×	.111	= square yards.
Cubic feet,	×	.04	= cubic yards.
Cubic inches,	×	.00058	= cubic feet.
Cubic feet,	×	.8038	= U. S. bushels.
U. S. bushels,	×	1.2446	= cubic feet.
U. S. gallons,	×	.13367	= cubic feet.
U. S. gallons,	×	231.	= cubic inches.
Cubic feet,	×	7.48	= U. S. gallons.
Cubic inches,	×	.004329	= U. S. gallons.
Pounds,	×	.009	= cwt.
Pounds,	×	.00045	= tons.
Cubic feet of water,	×	62.5	= lbs. avoird.
Cubic inches of water,	×	.03617	= lbs. avoird.

MENSURATION OF SURFACES,

Area of circle = diameter² × .7854.

Area of triangle = base × $\frac{1}{2}$ perpendicular.

Surface of a sphere = diameter² × 3.1416.

MENSURATION OF SOLIDS.

Cylinder = area of end × length.

Sphere = diameter² × 0.5236.

Wedge = area of base × $\frac{1}{2}$ perpendicular.

To find the radius, when the length of the arc and rise are given, square one-half the arc and divide by the rise, add the rise and divide by two. Example—Length of arc 8 inches, rise 2 inches. $4^2 = 16 \div 2 = 8 \div 2 = 10 \div 2 = 5$ inches radius.

CAPACITY OF CISTERNS IN GALLONS.

FOR EACH FOOT IN DEPTH.

1 foot diameter = 6 gallons.	11 feet diameter = 711 gallons.
2 feet " = 23 "	12 " " = 846 "
3 " " = 53. "	13 " " = 993 "
4 " " = 94 "	14 " " = 1151 "
5 " " = 147 "	15 " " = 1322 "
6 " " = 211 "	16 " " = 1504 "
7 " " = 288 "	17 " " = 1698 "
8 " " = 376 "	18 " " = 1904 "
9 " " = 476 "	19 " " = 2121 "
10 " " = 587 "	20 " " = 2350 "

WEIGHTS AND SPECIFIC GRAVITIES OF LIQUIDS.

LIQUIDS AT 32° FAHRENHEIT.	Weight of 1 Cubic Foot.	Weight of 1 Gallon.	Specific Gravity Water = 1.
	Pounds.	Pounds.	
Mercury	848.7	136.0	13.596
Sulphuric acid, maximum.....	114.9	18.4	1.84
Pure water (distilled) at 39° Fahr	62.425	10.0	1.00
Sea water, ordinary ..	64.05	10.3	1.026
Water of the Dead Sea.....	77.4	12.4	1.24
Nitric acid of commerce	76.2	12.2	1.22
Milk	64.3	10.3	1.08
Linseed oil	58.7	9.4	0.94
Whale oil	57.4	9.2	0.92
Olive oil	57.1	9.15	0.915
Turpentine	54.3	8.7	0.87
Petroleum	54.9	8.8	0.88
Naphtha	53.1	8.5	0.85
Alcohol, proof spirit	57.4	9.2	0.92
Alcohol, pure.....	49.3	7.9	0.79
Benzine	53.1	8.5	0.85
Wood spirit	49.9	8.0	0.80
Ether, sulphuric.....	44.9	7.2	0.72

SPACE OCCUPIED BY ONE TON OF 2240 POUNDS.

	Cubic Feet.
Corn, on cob.....	80
Corn, shelled.....	50
Wheat.....	46
Rye.....	50
Barley.....	58
Oats.....	86
Hay.....	512
Coal, anthracite, broken lumps.....	42
Coal, bituminous, broken lumps.....	46
Coke.....	73
Charcoal, average.....	123
Lime, broken lumps.....	38
Salt, coarse.....	35
Brick, pressed, piled.....	15
Brick, common, piled.....	20
Sand, dry.....	23
Sand, wet.....	18
Clay, wet.....	17
Mud, wet.....	17
Earth, dry.....	27
Earth in bank.....	18
Masonry, granite laid in mortar.....	14
Masonry, medium quality.....	18
Limestone.....	23
Quartz.....	20

WEIGHT OF LUMBER PER 1000 FEET, BOARD MEASURE.

	Gross Tons.
Ash, American white, dry.....	1.41
Black walnut, ".....	1.41
Cherry, ".....	1.56
Chestnut, ".....	1.53
Elm, ".....	1.30
Hemlock, ".....	.93
Hickory, ".....	1.97
Maple, ".....	1.82
Mahogany, Spanish, ".....	1.97
Mahogany, Honduras, ".....	1.30
Oak, live, ".....	2.21
Oak, white, ".....	1.79
Oak, red, ".....	1.41
Pine, white, ".....	.93
Pine, Norway, ".....	1.28
Fine, Southern yellow, ".....	1.67
Pine, long leaf heart, not seasoned.....	2.42
Spruce, dry.....	.93
Sycamore, ".....	1.38

NOTE.—Green timber runs from $\frac{1}{2}$ to $\frac{1}{2}$ more in weight than dry. Ordinary building timber, tolerably seasoned, $\frac{1}{8}$ more than dry.

WEIGHTS OF LOGS, LUMBER, ETC.

WEIGHT OF GREEN LOGS TO SCALE 1000 FEET, BOARD MEASURE.

Yellow pine (Southern).....	8000 to 10000 lbs.
Norway pine (Michigan).....	7000 to 8000 lbs.
White pine (Michigan) { off of stump.....	6000 to 7000 lbs.
{ out of water.....	7000 to 8000 lbs.
White pine (Pennsylvania), bark off.....	5000 to 6000 lbs.
Hemlock (Pennsylvania), bark off.....	6000 to 7000 lbs.

Four acres of water are required to store 1,000,000 feet of logs.

WEIGHT PER BUSHEL AND PER CUBIC FOOT.

	Weight per Bushel.	Weight per Cubic Foot.
Bran.....	20 lbs.	16 lbs.
Barley.....	48 "	39 "
Buckwheat.....	48 "	39 "
Cornmeal.....	48 "	39 "
Corn, shelled.....	56 "	45 "
Corn on cob.....	35 "	28 "
Oats.....	32 "	26 "
Rye.....	56 "	45 "
Wheat.....	60 "	48 "
Beans.....	60 "	48 "
Peas.....	60 "	48 "
Turnips.....	55 "	44 "
Potatoes.....	60 "	48 "
Sweet potatoes.....	55 "	44 "
Onions.....	57 "	46 "
Clover seed.....	60 "	48 "
Timothy seed.....	45 "	36 "
Flax.....	56 "	45 "
Hemp.....	44 "	36 "
Malt.....	38 "	30 "
Salt, coarse.....	78 "	63 "
Lime, broken lumps.....	75 "	60 "
Cement.....	66 "	53 "

One heaped bushel = $1\frac{1}{4}$ struck bushels.

One struck bushel = 1.24445 cubic feet.

One cubic foot = .8036 of a struck bushel.

WEIGHTS OF VARIOUS SUBSTANCES.

	PER CUBIC FOOT.	Pounds.
Aluminum.....		162
Anthracite, solid, of Pennsylvania.....		93
" broken, loose.....		54
" " moderately shaken		58
" heaped bushel, loose.....		(80)
Ash, American white, dry.....		38
Asphaltum		87
Brass (copper and zinc), cast.....		504
" rolled.....		524
Brick, best pressed.....		150
" common hard.....		125
" soft, inferior.....		100
Brickwork, pressed brick.....		140
" ordinary		112
Cement, hydraulic, ground, loose. American, Rosendale		56
" " " " " Louisville.....		50
" " " " English, Portland		90
Cherry, dry		42
Chestnut, dry.....		41
Coal, bituminous, solid.....		84
" " broken, loose.....		49
" " heaped bushel, loose.....		(74)
Coke, loose, of good coal		27
" " heaped bushel.....		(38)
Copper, cast		542
" rolled		548

WEIGHTS OF VARIOUS SUBSTANCES.

PER CUBIC FOOT.		Pounds.
Earth, common loam, dry, loose.....		76
“ “ “ moderately rammed.....		95
“ as a soft flowing mud.....		108
Ebony, dry.....		76
Elm, dry.....		35
Flint.....		162
Glass, common window		157
Gneiss, common		168
Gold, cast, pure, or 24 carat		1204
“ pure hammered		1217
Granite.....		170
Gravel, about the same as sand.		
Gypsum (plaster-of-paris).....		142
Hemlock, dry.....		25
Hickory, dry.....		53
Hornblende, black.....		203
Ice.....		58.7
Iron, cast.....		450
“ wrought, purest.....		485
“ “ average.....		480
Ivory.....		114
Lead.....		711
Lignum-vitæ, dry		83
Lime, quick, ground, loose or in small lumps.....		53
“ “ “ “ thoroughly shaken.....		75
“ “ “ “ per struck bushel.....		(66)

WEIGHTS OF VARIOUS SUBSTANCES.

PER CUBIC FOOT.		Pounds.
Limestones and marbles.....		168
" " " loose, in irregular fragments.....		96
Magnesium.....		109
Mahogany, Spanish, dry		53
" Honduras, dry		35
Maple, dry.....		49
Masonry of granite or limestone, well dressed		165
" of mortar rubble.....		154
" of dry rubble (well scabbled).....		138
" of sandstone, well dressed.....		144
Mercury, at 32° Fahrenheit.....		849
Mica.....		183
Mortar, hardened.....		103
Mud, dry close	80 to 110	
" wet, fluid, maximum.....		120
Oak, live, dry.....		59
" white, dry.....		52
" other kinds.....	32 to 45	
Petroleum.....		55
Pine, white, dry.....		25
" yellow, northern.....		34
" " southern		45
Platinum.....		1342
Quartz, common, pure		165

WEIGHTS OF VARIOUS SUBSTANCES.

PER CUBIC FOOT.		Pounds.
Rosin		69
Salt, coarse, Syracuse, N. Y.....		45
“ Liverpool, fine, for table use.....		49
Sand, of pure quartz, dry loose	90 to 106	
“ well shaken.....	99 to 117	
“ perfectly wet.....	120 to 140	
Sandstone, fit for building		151
Shales, red or black.....		162
Silver.....		655
Slate..		175
Snow, freshly fallen.....	5 to 12	
“ moistened and compacted by rain.....	15 to 50	
Spruce, dry.....		25
Steel.....		490
Sulphur.....		125
Sycamore, dry.....		37
Tar.....		62
Tin, cast.....		459
Turf or peat, dry, unpressed.....	20 to 30	
Walnut, black, dry.....		38
Water, pure rain or distilled at 60° Fahr.....		62½
“ sea.....		64
Wax, bees		60.5
Zinc or spelter.....		437

**GENERAL RULES FOR DETERMINING WEIGHT
OF ANY PIECE OF WROUGHT IRON.**

One cubic foot of wrought iron =	480 lbs.
One square foot, one inch thick = $4\frac{3}{4}$	= 40 lbs.
One square inch, one foot long = $\frac{1}{4}$	= $3\frac{1}{2}$ lbs.
One square inch, one yard long = $3\frac{1}{2} \times 3$	= 10 lbs.

Hence, the weight of any piece of wrought iron in pounds per yard is equal to 10 times its area in square inches.

EXAMPLE.—The area of a bar 3 inches x 1 inch = 3 square inches, and its weight is 30 lbs. per yard.

For round iron, the weight per foot may be found by taking the diameter in quarter inches, squaring it, and dividing by 6.

EXAMPLE.—What is the weight of 2-inch round iron? 2 inches = 8 quarter inches; $8^2 = 64$; $\frac{64}{6} = 10\frac{2}{3}$ lbs. per foot.

EXAMPLE.—What is the weight of $\frac{3}{4}$ -inch round iron? $\frac{3}{4}$ -inch = 3 quarter inches; $3^2 = 9$; $\frac{9}{6} = 1\frac{1}{2}$ lbs. per foot.

TO FIND THE WEIGHT OF CASTINGS BY THE WEIGHT OF PINE PATTERNS.

Multiply the weight of the pattern by 16 for cast iron, 13 for brass, 19 for lead, 12.2 for tin, 14.4 for zinc, and the product is the weight of the casting.

SHRINKAGE OF CASTINGS.

Pattern makers' rule should be for:

Cast iron,	$\frac{1}{8}$	inch longer per foot.
Brass,	$\frac{3}{16}$	" " " "
Lead,	$\frac{1}{8}$	" " " "
Tin,	$\frac{1}{2}$	" " " "
Zinc,	$\frac{3}{16}$	" " " "

FLAT BAR IRON.

WEIGHT PER LINEAL FOOT.

Width in Inches.	THICKNESS IN INCHES.												
	1-16	$\frac{1}{8}$	3-16	$\frac{1}{4}$	$\frac{5}{16}$	$\frac{3}{8}$	$\frac{7}{16}$	$\frac{1}{2}$	$\frac{5}{8}$	1	1 $\frac{1}{4}$	1 $\frac{1}{2}$	2
121	.42	.63	.84	1.26	1.68	2.11	2.53	2.95	3.37	4.25	5.10	6.80
1 $\frac{1}{4}$26	.53	.79	1.05	1.58	2.11	2.63	3.16	3.68	4.21	5.31	6.38	8.50
1 $\frac{1}{2}$32	.63	.95	1.26	1.90	2.53	3.16	3.79	4.42	5.05	6.38	7.65	10.20
1 $\frac{3}{4}$37	.74	1.11	1.47	2.21	2.95	3.68	4.42	5.16	5.89	7.44	8.93	11.90
242	.84	1.26	1.68	2.53	3.37	4.21	5.05	5.89	6.74	8.50	10.20	13.60
2 $\frac{1}{4}$47	.95	1.42	1.90	2.84	3.79	4.74	5.68	6.83	7.58	9.57	11.48	15.30
2 $\frac{1}{2}$53	1.05	1.58	2.11	3.16	4.21	5.26	6.32	7.37	8.42	10.63	12.75	17.00
2 $\frac{3}{4}$58	1.16	1.74	2.32	3.47	4.63	5.79	6.95	8.10	9.26	11.69	14.03	18.70
363	1.26	1.90	2.53	3.79	5.05	6.32	7.58	8.84	10.10	12.75	15.30	20.40
3 $\frac{1}{4}$68	1.37	2.05	2.74	4.11	5.47	6.84	8.21	9.58	10.95	13.81	16.58	22.10
3 $\frac{1}{2}$74	1.47	2.21	2.95	4.42	5.89	7.37	8.84	10.32	11.79	14.87	17.85	23.80
3 $\frac{3}{4}$79	1.58	2.37	3.16	4.74	6.32	7.89	9.47	11.05	12.63	15.94	19.13	25.50
484	1.68	2.53	3.37	5.05	6.74	8.42	10.10	11.79	13.47	17.00	20.40	27.20
4 $\frac{1}{4}$90	1.79	2.68	3.58	5.37	7.16	8.65	10.74	12.53	14.31	18.06	21.68	28.90
4 $\frac{1}{2}$95	1.90	2.84	3.79	5.68	7.58	9.47	11.38	13.26	15.16	19.13	22.95	30.60
4 $\frac{3}{4}$	1.00	2.00	3.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	20.00	24.00	32.00
5	1.05	2.11	3.16	4.21	6.32	8.42	10.53	12.63	14.74	16.84	21.25	25.50	34.00
5 $\frac{1}{4}$	1.11	2.21	3.32	4.42	6.63	8.84	11.05	13.26	15.47	17.68	22.32	26.78	35.70
5 $\frac{1}{2}$	1.16	2.32	3.47	4.63	6.95	9.26	11.58	13.89	16.21	18.52	23.38	28.05	37.40
5 $\frac{3}{4}$	1.21	2.42	3.63	4.84	7.26	9.68	12.10	14.53	16.95	19.37	24.44	29.33	39.10
6	1.26	2.53	3.79	5.05	7.58	10.10	12.63	15.16	17.68	20.21	25.50	30.60	40.80
6 $\frac{1}{2}$	1.38	2.76	4.14	5.53	8.29	11.05	13.81	16.58	19.34	22.10	27.62	33.15	44.20
7	1.48	2.97	4.46	5.95	8.93	11.90	14.87	17.85	20.83	23.80	29.75	35.70	47.60
7 $\frac{1}{2}$	1.59	3.18	4.78	6.36	9.57	12.75	15.94	19.13	22.32	25.50	31.88	38.26	51.00
8	1.70	3.41	5.10	6.80	10.20	13.60	17.00	20.40	23.80	27.20	34.00	40.80	54.40

ROUND AND SQUARE IRON.

WEIGHT PER LINEAL FOOT FROM $\frac{1}{8}$ TO 8 INCH.

SIZE.	ROUND.	SQUARE.	SIZE.	ROUND.	SQUARE.
In Inches.	Weight in Pounds.	Weight in Pounds.	In Inches.	Weight in Pounds.	Weight in Pounds.
$\frac{1}{8}$.167	.212	$2\frac{1}{2}$	16.69	21.25
$\frac{5}{16}$.261	.333	$2\frac{5}{8}$	18.40	23.43
$\frac{3}{8}$.375	.478	$2\frac{3}{4}$	20.20	25.00
$\frac{7}{8}$.511	.651	$2\frac{7}{8}$	22.07	28.10
$\frac{1}{2}$.667	.850	3	24.03	30.60
$\frac{5}{8}$	1.043	1.328	$3\frac{1}{4}$	28.20	35.92
$\frac{3}{4}$	1.502	1.913	$3\frac{1}{2}$	32.71	41.65
$\frac{7}{8}$	2.044	2.603	$3\frac{3}{4}$	37.56	47.82
1	2.670	3.400	4	42.73	54.40
$1\frac{1}{8}$	3.379	4.303	$4\frac{1}{4}$	48.24	61.41
$1\frac{1}{4}$	4.173	5.312	$4\frac{1}{2}$	54.07	68.85
$1\frac{3}{8}$	5.049	6.428	$4\frac{3}{4}$	60.25	76.71
$1\frac{1}{2}$	6.008	7.650	5	66.76	85.00
$1\frac{5}{8}$	7.051	8.978	$5\frac{1}{4}$	73.60	93.72
$1\frac{3}{4}$	8.178	10.41	$5\frac{1}{2}$	80.77	102.8
$1\frac{7}{8}$	9.388	11.95	$5\frac{3}{4}$	88.29	112.4
2	10.68	13.60	6	96.14	122.4
$2\frac{1}{8}$	12.06	15.35	$6\frac{1}{4}$	112.8	143.6
$2\frac{1}{4}$	13.52	17.22	7	130.9	166.6
$2\frac{3}{8}$	15.07	19.18	$7\frac{1}{2}$	150.2	191.3
			8	171.0	217.6

PLATE IRON.
WEIGHT PER SQUARE FOOT.

Thickness in Inches.	Weight in Pounds.	Thickness in Inches.	Weight in Pounds.
$\frac{1}{16}$	1.25	$\frac{3}{8}$	15.10
$\frac{1}{8}$	2.519	$\frac{7}{8}$	17.65
$\frac{3}{16}$	3.788	$\frac{1}{2}$	20.20
$\frac{1}{4}$	5.054	$\frac{1}{8}$	22.76
$\frac{5}{16}$	6.305	$\frac{3}{4}$	25.16
$\frac{3}{8}$	7.578	$\frac{1}{4}$	30.20
$\frac{1}{2}$	10.09	$\frac{7}{8}$	35.30
$\frac{5}{8}$	12.58	1	40.40

METALS.
WEIGHT PER SQUARE FOOT.

Thickness.	Wrot Iron.	Cast Iron.	Steel.	Copper.	Brass.	Lead.	Zinc.
$\frac{1}{16}$	2.51	2.34	2.55	2.89	2.67	3.69	2.34
$\frac{1}{8}$	5.03	4.69	5.10	5.78	5.35	7.38	4.68
$\frac{3}{16}$	7.58	7.03	7.66	8.67	8.02	11.07	7.02
$\frac{1}{4}$	10.07	9.38	10.21	11.56	10.70	14.76	9.36
$\frac{5}{16}$	12.58	11.73	12.76	14.45	13.37	18.45	11.70
$\frac{3}{8}$	15.10	14.07	15.31	17.34	16.05	22.14	14.04
$\frac{7}{8}$	17.62	16.42	17.87	20.23	18.72	25.83	16.34
$\frac{1}{2}$	20.14	18.77	20.42	23.12	21.40	29.53	18.72
$\frac{9}{16}$	22.65	21.11	22.97	26.01	24.07	33.22	21.08
$\frac{5}{8}$	25.17	23.46	25.52	28.90	26.75	36.91	23.44
$\frac{11}{16}$	27.69	25.81	28.08	31.97	29.42	40.60	25.80
$\frac{3}{4}$	30.21	28.15	30.63	34.68	32.10	44.29	28.13
$\frac{13}{16}$	32.72	30.50	33.18	37.57	35.19	47.98	30.49
$\frac{7}{8}$	35.24	32.85	35.73	40.69	38.28	51.67	32.81
$\frac{15}{16}$	37.76	35.19	38.28	43.35	41.37	55.37	35.17
1	40.28	37.54	40.83	46.25	43.75	59.06	37.50

WEIGHT OF SHEETS OF WROUGHT IRON, STEEL, COPPER AND BRASS.

(HASWELL.)

WEIGHT PER SQUARE FOOT. THICKNESS BY BIRMINGHAM GAUGE.

Number of Gauge.	Thickness in Inches.	Iron.	Steel.	Copper.	Brass.
0000	.454	18.22	18.46	20.57	19.43
000	.425	17.05	17.28	19.25	18.19
00	.38	15.25	15.45	17.21	16.26
0	.34	13.64	13.82	15.40	14.55
1	.3	12.04	12.20	13.59	12.84
2	.284	11.40	11.55	12.87	12.16
3	.259	10.39	10.53	11.73	11.09
4	.238	9.55	9.68	10.78	10.19
5	.22	8.83	8.95	9.97	9.42
6	.203	8.15	8.25	9.20	8.69
7	.18	7.22	7.32	8.15	7.70
8	.165	6.62	6.71	7.47	7.06
9	.148	5.94	6.02	6.70	6.33
10	.134	5.38	5.45	6.07	5.74
11	.12	4.82	4.88	5.44	5.14
12	.109	4.37	4.43	4.94	4.67
13	.095	3.81	3.86	4.30	4.07
14	.083	3.33	3.37	3.76	3.55
15	.072	2.89	2.93	3.26	3.08
16	.065	2.61	2.64	2.94	2.78
17	.058	2.33	2.36	2.63	2.48
18	.049	1.97	1.99	2.22	2.10
19	.042	1.69	1.71	1.90	1.80
20	.035	1.40	1.42	1.59	1.50

WEIGHT OF SHEETS OF WROUGHT IRON, STEEL, COPPER AND BRASS.

(HASWELL.)

WEIGHT PER SQUARE FOOT. THICKNESS BY BIRMINGHAM GAUGE.

Number of Gauge.	Thickness in Inches.	Iron.	Steel.	Copper.	Brass.
21	.032	1.28	1.30	1.45	1.37
22	.028	1.12	1.14	1.27	1.20
23	.025	1.00	1.02	1.13	1.07
24	.022	.883	.895	1.00	.942
25	.02	.803	.813	.906	.856
26	.018	.722	.732	.815	.770
27	.016	.642	.651	.725	.685
28	.014	.562	.569	.634	.599
29	.013	.522	.529	.589	.556
30	.012	.482	.488	.544	.514
31	.01	.401	.407	.453	.428
32	.009	.361	.366	.408	.385
33	.008	.321	.325	.362	.342
34	.007	.281	.285	.317	.300
35	.005	.201	.203	.227	.214
Specific gravity		7.704	7.806	8.698	8.218
Weight, cubic foot		481.25	487.75	543.6	513.6
" " inch2787	.2823	.3146	.2972

As there are many gauges in use differing from each other, and even the thicknesses of a certain specified gauge, as the Birmingham, are not assumed the same by all manufacturers, orders for sheets should always state the weight per square foot, or thickness in thousandths of an inch.

GALVANIZED SHEET IRON.

THICKNESS AND WEIGHT.

Wire Gauge.	Weight per Sq. Foot.	Wire Gauge.	Weight per Sq. Foot.	Wire Gauge.	Weight per Sq. Foot.	Wire Gauge.	Weight per Sq. Foot.
30	10 oz.	26	15 oz.	22	21 oz.	18	37 oz.
29	11 "	25	16 "	21	24 "	17	43 "
28	12 "	24	17 "	20	28 "	16	48 "
27	14 "	23	19 "	19	33 "	14	60 "

The ordinary size of sheet iron is from 2 to 2½ feet wide and from 6 to 8 feet long.

Galvanizing sheet iron adds about one-third of a pound to its weight, per square foot.

WEIGHT AND DIMENSIONS OF CARNEGIE STEEL CAR TRUCK CHANNELS.

Carnegie Index Number.	Depth of Channel in Inches.	Weight per Foot.		Flange Width.		Web Thickness.		Increase of Flange and Web for Each Pound in Weight.
		Min.	Max.	Min.	Max.	Min.	Max.	
C 20	13.0	31.50	52.0	4.00	4.46	.375	.84	.023
C 54	12.0	21.33	30.0	2.64	2.85	.31	.52	.025
C 103	10.5	20.00		2.50	3.375	.375		.029
C 106	10.5	26.50		2.50	3.375	.50		.029

CARNEGIE STEEL ANGLES.

Index Number.	Thickness in Inches.	Size in Inches.	Weight per Foot.	Index Number.	Thickness in Inches.	Size in Inches.	Weight per Foot.
A 182	$\frac{5}{8}$	4 x 5	17.8	A 29	$\frac{5}{8}$	3½ x 3½	13.6
A 184	$\frac{1}{2}$	4 x 5	14.5	A 31	$\frac{1}{2}$	3½ x 3½	11.1
A 191	$\frac{5}{8}$	3½ x 5	16.8	A 223	$\frac{5}{8}$	3 x 4	13.6
A 193	$\frac{1}{2}$	3½ x 5	13.6	A 225	$\frac{1}{2}$	3 x 4	11.1
A 21	$\frac{5}{8}$	4 x 4	15.7	A 232	$\frac{5}{8}$	3 x 3½	12.5
A 23	$\frac{1}{2}$	4 x 4	12.8	A 234	$\frac{1}{2}$	3 x 3½	10.2
A 207	$\frac{5}{8}$	3 x 4½	14.6	A 34	$\frac{5}{8}$	3 x 3	11.4
A 209	$\frac{1}{2}$	3 x 4½	11.9	A 36	$\frac{1}{2}$	3 x 3	9.4

TIN PLATE (TINNED SHEET STEEL).**ORDINARY SIZES USED IN CAR WORK.**

Birmingham Wire Gauge.	Thickness.	Size.	No. of Sheets per Box.	Net Weight per Box.
29	IC	10 x 20	225	160
27	IX	10 x 20	225	195
26	IXX	10 x 20	225	222
29	IC	14 x 20	112	108
27	IX	14 x 20	112	135
26	IXX	14 x 20	112	160
29	IC	20 x 28	112	216
27	IX	20 x 28	112	270
26	IXX	20 x 28	112	320

TERNE PLATES.

Birmingham Wire Gauge.	Thickness.	Size.	No. of Sheets per Box.	Net Weight per Box.
29	IC	10 x 20	112	80
27	IX	10 x 20	112	100
29	IC	14 x 20	112	112
27	IX	14 x 20	112	140
29	IC	20 x 28	112	224
27	IX	20 x 28	112	280

The usual sizes of roofing tin are 14 x 20 and 20 x 28, and laid on roof weigh from 62 to 75 pounds per square.

Roofing plates or terne plates (steel plates coated with an alloy of tin and lead) are made only in IC and IX thickness, 27 and 29 Birmingham wire gauge.

WEIGHT OF 100 BOLTS WITH SQUARE HEADS AND NUTS.

DIAMETER OF BOLTS.

Length Under Head.	$\frac{1}{8}$ in.	5-16 in.	$\frac{3}{8}$ in.	7-16 in.	$\frac{1}{2}$ in.	$\frac{5}{8}$ in.	$\frac{3}{4}$ in.	$\frac{7}{8}$ in.	1 in.
1 $\frac{1}{2}$ inches	4.0	7.0	10.5	15.2	22.5	39.5	63.0		
1 $\frac{3}{4}$ "	4.4	7.5	11.3	16.3	23.8	41.6	66.0		
2 inches.....	4.8	8.0	12.0	17.4	25.2	43.8	69.0	109.0	163.
2 $\frac{1}{4}$ "	5.2	8.5	12.8	18.5	26.5	45.8	72.0	113.3	169.
2 $\frac{1}{2}$ "	5.5	9.0	13.5	19.6	27.8	48.0	75.0	117.5	174.
2 $\frac{3}{4}$ "	5.8	9.5	14.3	20.7	29.1	50.1	78.0	121.8	180.
3 inches.....	6.3	10.0	15.0	21.8	30.5	52.3	81.0	126.0	185.
3 $\frac{1}{4}$ "	7.0	11.0	16.5	24.0	33.1	56.5	87.0	134.3	196.
4 "	7.8	12.0	18.0	26.2	35.8	60.8	93.1	142.5	207.
4 $\frac{1}{4}$ "	8.5	13.0	19.5	28.4	38.4	65.0	99.1	151.0	218.
5 inches.....	9.3	14.0	21.0	30.6	41.1	69.3	105.2	159.6	229.
5 $\frac{1}{4}$ "	10.0	15.0	22.5	32.8	43.7	73.5	111.3	168.0	240.
6 "	10.8	16.0	24.0	35.0	46.4	77.8	117.3	176.6	251.
6 $\frac{1}{2}$ "	11.5	17.0	25.5	37.2	49.0	82.0	123.4	185.0	262.
7 inches.....			27.0	39.4	51.7	86.3	129.4	193.7	273.
7 $\frac{1}{4}$ "			28.5	41.6	54.3	90.5	135.0	202.0	284.
8 "			30.0	43.8	59.6	94.8	141.5	210.7	295.
9 "			33.1	48.2	64.9	103.3	153.6	227.8	317.
10 inches.....				52.6	70.2	111.8	165.7	244.8	339.
11 "				56.8	75.5	120.3	177.8	261.9	360.
12 "				61.0	80.8	123.8	189.9	278.9	382.
13 "				65.2	86.1	137.3	202.0	296.0	404.
14 inches.....					91.4	145.8	214.1	313.0	426.
15 "					96.7	154.3	226.2	330.1	448.
16 "					102.0	162.8	238.3	347.1	470.
Per inch, additional.	1.4	2.1	3.1	4.2	5.5	8.5	12.3	16.7	21.8

WEIGHTS OF NUTS AND BOLT HEADS IN POUNDS.

FOR CALCULATING THE WEIGHT OF LONG BOLTS.

Diameter of bolt, inches.....		$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{2}$	$\frac{5}{8}$	$\frac{3}{4}$	$\frac{7}{8}$
Weight of hex. head and nut.....		.017	.057	.128	.267	.48	.73
“ “ square “ “ “021	.069	.164	.320	.53	.88
Diameter of bolt, inches.....	1	$1\frac{1}{4}$	$1\frac{1}{2}$	$1\frac{3}{4}$	2	$2\frac{1}{2}$	3
Weight of hex. head and nut.....	1.10	2.14	3.78	5.6	8.75	17.	28.8
“ “ square “ “ “	1.31	2.56	4.42	7.0	10.5	21.	36.4

UNITED STATES STANDARD NUMBER OF THREADS TO AN INCH.

Diameter	$\frac{1}{4}$ in.	$\frac{5}{16}$ in.	$\frac{3}{8}$ in.	$\frac{7}{8}$ in.	$\frac{1}{2}$ in.	$\frac{5}{8}$ in.	$\frac{3}{4}$ in.
No. of threads.....	20	18	16	14	13	11	10
Diameter	$\frac{7}{8}$ in.	1 in.	$1\frac{1}{8}$ in.	$1\frac{1}{4}$ in.	$1\frac{3}{8}$ in.	$1\frac{1}{2}$ in.	$1\frac{3}{4}$ in.
No. of threads.....	9	8	7	7	6	6	5
Diameter	$1\frac{7}{8}$	2 in.	$2\frac{1}{4}$ in.	$2\frac{1}{2}$ in.	$2\frac{3}{4}$ in.	3 in.	$3\frac{1}{2}$ in.
No. of threads.....	5	$4\frac{1}{2}$	$4\frac{1}{2}$	4	4	$3\frac{1}{2}$	$3\frac{1}{2}$

STANDARD BOLT HEADS AND NUTS.

RECOMMENDED BY THE FRANKLIN INSTITUTE.

Diameter of rough head = $1\frac{1}{2} \times$ diameter of bolt + $\frac{1}{8}$ inch.

Thickness of rough head = $\frac{1}{2}$ diameter of head.

Diameter of rough nut = $1\frac{1}{2} \times$ diameter of bolt + $\frac{1}{8}$ inch.

Thickness of rough nut = diameter of bolt.

The above standards for bolt heads and nuts were recommended by the Franklin Institute in December, 1864, but the proportions have not found general acceptance because of the odd sizes of bar required to make the nut.

SIZES AND WEIGHTS OF HOT PRESSED SQUARE NUTS.

THE SIZES ARE THE USUAL MANUFACTURERS', NOT THE FRANKLIN INSTITUTE STANDARD.

BOTH WEIGHTS AND SIZES ARE FOR THE UNFINISHED NUT.

Size of Bolt.	Weight of 100 Nuts.	Rough Hole.	Thickness of Nut.	Side of Square.	No. of Nuts in 100 lbs.
$\frac{1}{4}$ inch.	1.5	$\frac{7}{8}$	$\frac{1}{4}$	$\frac{1}{2}$	6800.
$\frac{3}{8}$ "	4.9	$1\frac{1}{8}$	$\frac{3}{8}$	$\frac{3}{4}$	2050.
$\frac{1}{2}$ "	8.6	$1\frac{3}{8}$	$\frac{1}{2}$	$\frac{7}{8}$	1170.
$\frac{3}{4}$ "	11.8	$1\frac{7}{8}$	$\frac{3}{4}$	1	850.
$\frac{5}{8}$ "	17.7	$1\frac{5}{8}$	$\frac{5}{8}$	$1\frac{1}{8}$	570.
$\frac{5}{8}$ "	22.8	$1\frac{5}{8}$	$\frac{5}{8}$	$1\frac{1}{4}$	440.
$\frac{3}{4}$ "	32.3	$1\frac{1}{2}$	$\frac{3}{4}$	$1\frac{3}{8}$	310.
$\frac{3}{4}$ "	39.8	$1\frac{1}{2}$	$\frac{3}{4}$	$1\frac{1}{2}$	251.
$\frac{7}{8}$ "	53.	$1\frac{5}{8}$	$\frac{7}{8}$	$1\frac{5}{8}$	190.
$\frac{7}{8}$ "	63.	$1\frac{5}{8}$	$\frac{7}{8}$	$1\frac{3}{4}$	159.
1 "	68.	$\frac{7}{8}$	1	$1\frac{3}{4}$	146.
1 "	94.	$\frac{7}{8}$	1	2	106.
$1\frac{1}{8}$ "	103.	$1\frac{5}{8}$	$1\frac{1}{8}$	2	97.
$1\frac{1}{8}$ "	137.	$1\frac{5}{8}$	$1\frac{1}{8}$	$2\frac{1}{4}$	73.
$1\frac{1}{4}$ "	145.	$1\frac{1}{2}$	$1\frac{1}{4}$	$2\frac{1}{4}$	69.
$1\frac{1}{4}$ "	186.	$1\frac{1}{2}$	$1\frac{1}{4}$	$2\frac{1}{2}$	54.
$1\frac{3}{8}$ "	247.	$1\frac{3}{8}$	$1\frac{3}{8}$	$2\frac{3}{4}$	41.
$1\frac{1}{2}$ "	319.	$1\frac{5}{8}$	$1\frac{1}{2}$	3	31.3
$1\frac{5}{8}$ "	400.	$1\frac{7}{8}$	$1\frac{5}{8}$	$3\frac{1}{4}$	24.8
$1\frac{3}{4}$ "	500.	$1\frac{5}{8}$	$1\frac{3}{4}$	$3\frac{1}{2}$	19.9
$1\frac{7}{8}$ "	620.	$1\frac{1}{4}$	$1\frac{7}{8}$	$3\frac{3}{4}$	16.2
2 "	750.	$1\frac{1}{2}$	2	4	13.4
$2\frac{1}{4}$ "	930.	2	$2\frac{1}{4}$	$4\frac{1}{4}$	10.7
$2\frac{1}{2}$ "	1130.	$2\frac{1}{4}$	$2\frac{1}{2}$	$4\frac{1}{2}$	8.9
3 "	1610.	$2\frac{1}{4}$	3	5	6.2

SPIKES, NAILS AND TACKS.

Size.	Length	STANDARD STEEL WIRE NAILS.				STEEL WIRE SPIKES.			COMMON IRON NAILS.		
		COMMON.		FINISHING.		Length	Diam. Inches.	No. per Pound.	Size.	Length	No. per Pound.
		Diam. Inches.	No. per Pound.	Diam. Inches.	No. per Pound.						
2d	1 in.	.0524	1060	.0453	1558	3 in.	.1620	41	2d	1 in.	800
3d	1½ "	.0588	640	.0508	913	3½ "	.1819	30	3d	1½ "	400
4d	1½ "	.0720	380	.0508	761	4 "	.2043	23	4d	1½ "	300
5d	1½ "	.0764	275	.0571	500	4½ "	.2294	17	5d	1½ "	200
6d	2 "	.0808	210	.0641	350	5 "	.2576	13	6d	2 "	150
7d	2½ "	.0858	160	.0641	315	5½ "	.2893	11	7d	2½ "	120
8d	2½ "	.0935	115	.0720	214	6 "	.2893	10	8d	2½ "	85
9d	2½ "	.0963	93	.0720	195	6½ "	.2249	7½	9d	2½ "	75
10d	3 "	.1082	77	.0808	137	7 "	.2249	7	10d	3 "	60
12d	3½ "	.1144	60	.0808	127	8 "	.3648	5	12d	3½ "	50
16d	3½ "	.1285	48	.0907	90	9 "	.3648	4½	16d	3½ "	40
20d	4 "	.1620	31	.1019	62				20d	4 "	20
30d	4½ "	.1819	22						30d	4½ "	16
40d	5 "	.2043	17						40d	5 "	14
50d	5½ "	.2284	13						50d	5½ "	11
60d	6 "	.2576	11						60d	6 "	8

TACKS.

Title, Oz.	Length, Inches.	No. per Pound.	Title, Oz.	Length, Inches.	No. per Pound.	Title, Oz.	Length, Inches.	No. per Pound.
1	⅛	16000	4	⅞	4000	14	1⅜	1143
1½	⅜	10666	6	⅞	2666	16	⅞	1000
2	¼	8000	8	⅞	2000	18	1⅜	888
2½	⅝	6400	10	1⅜	1600	20	1	800
3	⅝	5333	12	¾	1333	22	1⅜	727
						24	1⅜	666

HELICAL SPRINGS.

ORDINARY SIZES IN USE ON CARS.

DIAMETER.		HEIGHT.		CAPACITY.	WEIGHT.
OF STEEL.	OUTSIDE OF COIL.	FREE.	CLOSED.		AVERAGE.
Inches.	Inches.	Inches.	Inches.	Pounds.	Pounds.
$1\frac{1}{8}$	6	8	5	6000	$16\frac{1}{2}$
1	$5\frac{1}{2}$	$8\frac{1}{2}$	6	7500	$18\frac{1}{2}$
1	5	$10\frac{1}{2}$	8	8000	22
$1\frac{1}{4}$	8	9	$5\frac{3}{4}$	10000	$33\frac{1}{2}$
1	6	$5\frac{1}{8}$	$3\frac{3}{8}$	10000	$16\frac{1}{2}$
$\frac{5}{8}$	$3\frac{7}{8}$				
$1\frac{5}{8}$	8	9	6	11000	$36\frac{1}{2}$
$1\frac{1}{8}$	6	$5\frac{1}{4}$	$4\frac{1}{8}$	13000	21
$\frac{5}{8}$	$3\frac{5}{8}$				
$1\frac{5}{8}$	8	9	6	14000	51
$1\frac{3}{8}$	$5\frac{1}{8}$				
$1\frac{1}{8}$	$4\frac{7}{8}$	$4\frac{3}{8}$	$3\frac{3}{8}$	16000	10
$1\frac{3}{8}$	8	8	$5\frac{1}{4}$	16000	$50\frac{1}{2}$
$\frac{7}{8}$	5				
$1\frac{1}{2}$	$6\frac{1}{2}$	8	6	19000	35
$\frac{3}{4}$	$3\frac{5}{8}$				
$1\frac{1}{2}$	$6\frac{1}{2}$	6	$4\frac{1}{2}$	19000	26
$\frac{3}{4}$	$3\frac{5}{8}$				
4 coils.	$1\frac{1}{8}$	5	$5\frac{1}{8}$	28000	$35\frac{1}{2}$
	$1\frac{1}{8}$	5	$6\frac{1}{8}$	28000	43
	$1\frac{1}{8}$	$5\frac{1}{4}$	$4\frac{5}{8}$	42000	$51\frac{1}{2}$
	$1\frac{1}{8}$	$5\frac{1}{4}$	$5\frac{3}{8}$	42000	$60\frac{1}{2}$

AREAS AND CIRCUMFERENCES OF CIRCLES.

FOR DIAMETERS FROM $\frac{1}{8}$ TO 12, ADVANCING BY $\frac{1}{8}$ ths.

Diameter.	Area.	Circumference	Diameter.	Area.	Circumference
0			$1\frac{1}{2}$	1.7671	4.7124
$\frac{1}{8}$.0031	.1963	$\frac{9}{16}$	1.9175	4.9087
$\frac{1}{4}$.0123	.3927	$\frac{5}{8}$	2.0739	5.1051
$\frac{3}{8}$.0276	.5890	$1\frac{1}{4}$	2.2365	5.3014
$\frac{1}{2}$.0491	.7854	$1\frac{3}{4}$	2.4053	5.4978
$\frac{5}{8}$.0767	.9817	$1\frac{7}{8}$	2.5802	5.6941
$\frac{3}{4}$.1104	1.1781	$\frac{7}{8}$	2.7612	5.8905
$\frac{7}{8}$.1503	1.3744	$1\frac{5}{8}$	2.9483	6.0868
$\frac{1}{2}$.1963	1.5708	2	3.1416	6.2832
$\frac{9}{8}$.2485	1.7671	$1\frac{1}{8}$	3.3410	6.4795
$\frac{5}{8}$.3068	1.9635	$\frac{1}{8}$	3.5466	6.6759
$1\frac{1}{8}$.3712	2.1698	$\frac{3}{8}$	3.7583	6.8722
$\frac{3}{4}$.4418	2.3562	$2\frac{1}{4}$	3.9761	7.0686
$1\frac{3}{8}$.5185	2.5525	$1\frac{5}{8}$	4.2000	7.2649
$\frac{7}{8}$.6013	2.7489	$\frac{3}{8}$	4.4301	7.4613
$1\frac{5}{8}$.6903	2.9452	$1\frac{7}{8}$	4.6664	7.6576
1	.7854	3.1416	$2\frac{1}{2}$	4.9087	7.8540
$1\frac{1}{8}$.8866	3.3379	$1\frac{3}{8}$	5.1572	8.0503
$\frac{1}{8}$.9940	3.5343	$\frac{5}{8}$	5.4119	8.2467
$1\frac{3}{8}$	1.1075	3.7306	$1\frac{1}{8}$	5.6727	8.4430
$1\frac{1}{4}$	1.2272	3.9270	$2\frac{3}{4}$	5.9396	8.6394
$\frac{5}{8}$	1.3530	4.1233	$1\frac{7}{8}$	6.2126	8.8357
$\frac{3}{8}$	1.4849	4.3197	$\frac{7}{8}$	6.4918	9.0321
$1\frac{7}{8}$	1.6230	4.5160	$1\frac{5}{8}$	6.7771	9.2284

AREAS AND CIRCUMFERENCES OF CIRCLES—CONTINUED.

Diameter.	Area.	Circumference	Diameter.	Area.	Circumference
3	7.0686	9.4248	4 $\frac{1}{2}$	15.904	14.137
$3\frac{1}{8}$	7.3662	9.6211	$4\frac{5}{8}$	16.349	14.534
$3\frac{1}{4}$	7.6699	9.8175	$4\frac{3}{4}$	16.800	14.530
$3\frac{3}{8}$	7.9798	10.014	$4\frac{7}{8}$	17.257	14.726
$3\frac{1}{2}$	8.2958	10.210	4 $\frac{1}{2}$	17.721	14.923
$3\frac{5}{8}$	8.6179	10.407	$4\frac{3}{4}$	18.190	15.119
$3\frac{3}{4}$	8.9462	10.603	$4\frac{5}{8}$	18.665	15.315
$3\frac{7}{8}$	9.2806	10.799	$4\frac{7}{8}$	19.147	15.512
$3\frac{1}{2}$	9.6211	10.996	5	19.635	15.708
$3\frac{9}{8}$	9.9678	11.192	$5\frac{1}{8}$	20.129	15.904
$3\frac{5}{4}$	10.321	11.388	$5\frac{1}{4}$	20.629	16.101
$3\frac{11}{8}$	10.680	11.585	$5\frac{3}{8}$	21.135	16.297
$3\frac{3}{2}$	11.045	11.781	$5\frac{1}{2}$	21.648	16.493
$3\frac{7}{8}$	11.416	11.977	$5\frac{5}{8}$	22.166	16.690
$3\frac{1}{2}$	11.793	12.174	$5\frac{3}{4}$	22.691	16.886
$3\frac{9}{8}$	12.177	12.370	$5\frac{7}{8}$	23.221	17.082
4	12.566	12.566	$5\frac{1}{2}$	23.758	17.279
$4\frac{1}{8}$	12.962	12.763	$5\frac{3}{4}$	24.301	17.475
$4\frac{1}{4}$	13.364	12.959	$5\frac{5}{8}$	24.850	17.671
$4\frac{3}{8}$	13.772	13.155	$5\frac{3}{4}$	25.406	17.868
$4\frac{1}{2}$	14.186	13.352	$5\frac{7}{8}$	25.967	18.064
$4\frac{5}{8}$	14.607	13.548	$5\frac{1}{2}$	26.535	18.261
$4\frac{3}{4}$	15.033	13.744	$5\frac{5}{8}$	27.109	18.457
$4\frac{7}{8}$	15.466	13.941	$5\frac{3}{4}$	27.688	18.653

AREAS AND CIRCUMFERENCES OF CIRCLES—CONTINUED.

Diameter.	Area.	Circumference	Diameter.	Area.	Circumference
6	28.274	18.850	7½	44.179	23.562
⅞	28.866	19.046	⅞	44.918	23.758
⅞	29.465	19.242	⅞	45.664	23.955
⅞	30.069	19.439	⅞	46.415	24.151
6½	30.680	19.635	7¾	47.173	24.347
⅞	31.296	19.831	⅞	47.937	24.544
⅞	31.919	20.028	⅞	48.707	24.740
⅞	32.548	20.224	⅞	49.483	24.936
6½	33.183	20.420	8	50.265	25.133
⅞	33.824	20.617	⅞	51.054	25.329
⅞	34.472	20.813	⅞	51.849	25.525
⅞	35.125	21.009	⅞	52.649	25.722
6¾	35.785	21.206	8½	53.456	25.918
⅞	36.450	21.402	⅞	54.269	26.114
⅞	37.122	21.598	⅞	55.088	26.311
⅞	37.800	21.795	⅞	55.914	26.507
7	38.485	21.991	8½	56.745	26.704
⅞	39.175	22.187	⅞	57.583	26.900
⅞	39.871	22.384	⅞	58.426	27.096
⅞	40.574	22.580	⅞	59.276	27.293
7½	41.282	22.777	8¾	60.132	27.489
⅞	41.997	22.973	⅞	60.994	27.685
⅞	42.718	23.169	⅞	61.862	27.882
⅞	43.445	23.366	⅞	62.737	28.078

AREAS AND CIRCUMFERENCES OF CIRCLES—CONTINUED.

Diameter.	Area.	Circumference	Diameter.	Area.	Circumference
9	63.617	28.274	10½	86.590	32.987
9⅛	64.504	28.471	10⅝	87.624	33.183
9⅑	65.397	28.667	10⅞	88.664	33.379
9⅒	66.296	28.863	11	89.710	33.576
9¼	67.201	29.060	10½	90.763	33.772
9⅕	68.112	29.256	10⅝	91.821	33.968
9⅖	69.029	29.452	10⅞	92.886	34.165
9⅗	69.953	29.649	11	93.956	34.361
9½	70.882	29.845	11	95.033	34.558
9⅝	71.818	30.041	11⅛	96.116	34.754
9⅞	72.760	30.238	11¼	97.205	34.950
10	73.708	30.434	11⅝	98.301	35.147
10⅛	74.662	30.631	11⅞	99.402	35.343
10⅑	75.622	30.827	12	100.51	35.539
10⅒	76.589	31.023	12⅛	101.62	35.736
10¼	77.561	31.220	12⅝	102.74	35.932
10⅕	78.540	31.416	12⅞	103.87	36.128
10⅖	79.525	31.612	13	105.00	36.325
10⅗	80.516	31.809	13⅛	106.14	36.521
10½	81.513	32.005	13¼	107.28	36.717
10⅝	82.516	32.201	13⅝	108.43	36.914
10⅞	83.525	32.398	13⅞	109.59	37.110
11	84.541	32.594	14	110.75	37.306
11⅛	85.562	32.790	14⅛	111.92	37.503
			14¼	113.09	37.699

AREAS AND CIRCUMFERENCES OF CIRCLES.

FOR DIAMETERS FROM $\frac{1}{10}$ TO 10, ADVANCING BY TENTHS.

Diameter.	Area.	Circumference	Diameter.	Area.	Circumference
0.0			2.5	4.9087	7.8540
.1	.007854	.31416	.6	5.3093	8.1681
.2	.031416	.62832	.7	5.7256	8.4823
.3	.070686	.94248	.8	6.1575	8.7965
.4	.12566	1.2566	.9	6.6052	9.1106
0.5	.19635	1.5708	3.0	7.0686	9.4248
.6	.28274	1.8850	.1	7.5477	9.7389
.7	.38485	2.1991	.2	8.0425	10.0531
.8	.50266	2.5133	.3	8.5530	10.3673
.9	.63617	2.8274	.4	9.0792	10.6814
1.0	.7854	3.1416	3.5	9.6211	10.9956
.1	.9503	3.4558	.6	10.1788	11.3097
.2	1.1310	3.7699	.7	10.7521	11.6239
.3	1.3273	4.0841	.8	11.3411	11.9381
.4	1.5394	4.3982	.9	11.9459	12.2522
1.5	1.7671	4.7124	4.0	12.5664	12.5664
.6	2.0106	5.0265	.1	13.2025	12.8805
.7	2.2698	5.3407	.2	13.8544	13.1947
.8	2.5447	5.6549	.3	14.5220	13.5088
.9	2.8353	5.9690	.4	15.2053	13.8230
2.0	3.1416	6.2832	4.5	15.9043	14.1372
.1	3.4636	6.5973	.6	16.6190	14.4513
.2	3.8013	6.9115	.7	17.3494	14.7655
.3	4.1548	7.2257	.8	18.0956	15.0796
.4	4.5239	7.5398	.9	18.8574	15.3938

AREAS AND CIRCUMFERENCES OF CIRCLES—CONTINUED.

Diameter.	Area.	Circumference	Diameter.	Area.	Circumference
5.0	19.6350	15.7080	7.5	44.1786	23.5619
.1	20.4282	16.0221	.6	45.3646	23.8761
.2	21.2372	16.3363	.7	46.5663	24.1903
.3	22.0618	16.6504	.8	47.7836	24.5044
.4	22.9022	16.9646	.9	49.0167	24.8186
5.5	23.7583	17.2788	8.0	50.2655	25.1327
.6	24.6301	17.5929	.1	51.5300	25.4469
.7	25.5176	17.9071	.2	52.8102	25.7611
.8	26.4208	18.2212	.3	54.1061	26.0752
.9	27.3397	18.5354	.4	55.4177	26.3894
6.0	28.2743	18.8496	8.5	56.7450	26.7035
.1	29.2247	19.1637	.6	58.0880	27.0177
.2	30.1907	19.4779	.7	59.4468	27.3319
.3	31.1725	19.7920	.8	60.8212	27.6460
.4	32.1699	20.1062	.9	62.2114	27.9602
6.5	33.1831	20.4204	9.0	63.6173	28.2743
.6	34.2119	20.7345	.1	65.0388	28.5885
.7	35.2565	21.0487	.2	66.4761	28.9027
.8	36.3168	21.3628	.3	67.9291	29.2168
.9	37.3928	21.6770	.4	69.3978	29.5310
7.0	38.4845	21.9911	9.5	70.8822	29.8451
.1	39.5919	22.3053	.6	72.3823	30.1593
.2	40.7150	22.6195	.7	73.8981	30.4734
.3	41.8539	22.9336	.8	75.4296	30.7876
.4	43.0084	23.2478	.9	76.9769	31.1018
			10.0	78.5398	31.4159

AREAS AND CIRCUMFERENCES OF CIRCLES—CONTINUED.

To compute the area or circumference of a diameter greater than 10 and less than 101:

Take out the area or circumference from the table as though the number had one decimal, and move the decimal point two places to the right for the area, and one place for the circumference.

EXAMPLE.—Wanted the area and circumference of 98. The tabular area of 9.8 is 75.4296, and circumference 30.7876. Therefore the area for 98 = 7542.96, and the circumference = 307.876.

To compute the area or circumference of a diameter greater than 100:

Divide by a factor, as 2, 3, 4, 5, etc., if practicable, that will leave a quotient to be found in the table, then multiply the tabular area of the quotient by the *square* of the factor, or the tabular circumference by the factor.

EXAMPLE.—Wanted the area and circumference of 140. Dividing by 2, the quotient is 70, for which the area is 3848.45 and the circumference is 219.911. Therefore the area of 140 = $3848.45 \times 4 = 15393.80$, and the circumference $219.911 \times 2 = 439.822$.

DECIMALS OF AN INCH FOR EACH 1-64TH.

$\frac{1}{32}$	$\frac{1}{16}$	Decimal.	Fract'n	$\frac{1}{32}$	$\frac{1}{16}$	Decimal.	Fract'n	$\frac{1}{32}$	$\frac{1}{16}$	Decimal.	Fract'n
	1	.015625		11	22	.34375			43	.671875	
1	2	.03125			23	.359375		22	44	.6875	$\frac{11}{16}$
	3	.046875		12	24	.375	$\frac{3}{8}$		45	.703125	
2	4	.0625	$\frac{1}{16}$		25	.390625		23	46	.71875	
	5	.078125		13	26	.40625			47	.734375	
3	6	.09375			27	.421875		24	48	.75	$\frac{3}{4}$
	7	.109375		14	28	.4375	$\frac{7}{16}$		49	.765625	
4	8	.125	$\frac{1}{8}$		29	.453125		25	50	.78125	
	9	.140625		15	30	.46875			51	.796875	
5	10	.15625			31	.484375		26	52	.8125	$\frac{13}{16}$
	11	.171875		16	32	.50	$\frac{1}{2}$		53	.828125	
6	12	.1875	$\frac{3}{16}$		33	.515625		27	54	.84375	
	13	.203125		17	34	.53125			55	.859375	
7	14	.21875			35	.546875		28	56	.875	$\frac{7}{8}$
	15	.234375		18	36	.5625	$\frac{9}{16}$		57	.890625	
8	16	.25	$\frac{1}{4}$		37	.578125		29	58	.90625	
	17	.265625		19	38	.59375			59	.921875	
9	18	.28125			39	.609375		30	60	.9375	$\frac{15}{16}$
	19	.296875		20	40	.625	$\frac{5}{8}$		61	.953125	
10	20	.3125	$\frac{5}{16}$		41	.640625		31	62	.96875	
	21	.328125		21	42	.65625			63	.984375	
								32	64	1.00	1

SIZES AND WEIGHTS OF WROUGHT WASHERS.

Size of bolt.....	$\frac{3}{8}$ in.	$\frac{1}{2}$ in.	$\frac{5}{8}$ in.	$\frac{3}{4}$ in.	$\frac{7}{8}$ in.	1 in.	1 $\frac{1}{8}$ in.
" " hole	$\frac{7}{16}$ "	$\frac{1}{8}$ "	$\frac{11}{16}$ "	$\frac{13}{16}$ "	$\frac{31}{32}$ "	$\frac{11}{8}$ "	$\frac{11}{4}$ "
Outside diameter	1 "	1 $\frac{1}{2}$ "	1 $\frac{1}{2}$ "	1 $\frac{3}{4}$ "	2 "	2 $\frac{1}{2}$ "	2 $\frac{3}{4}$ "
Thickness B. W. G.....	No. 14	No. 11	No. 11	No. 11	No. 10	No. 8	No. 8
Number in 1 pound ...	76	33	24	17	12	6	5

RAILWAY CURVES.

To find the degree or radius of a curve, stretch taut a 50-foot tape-line on the inner side of the rail, and measure the perpendicular distance (which is the "middle ordinate") from the center of the tape-line to the inner edge of the rail.

The radius and degree of the curve corresponding to this middle ordinate may then be found in the following table.

Degree.	Radius in Feet.	Middle Ordinate in Inches.	Degree.	Radius in Feet.	Middle Ordinate in Inches.
30'	11460	.22	11°	522	7.20
1°	5730	.66	12°	478	7.87
2°	2865	1.32	13°	442	8.51
3°	1910	1.97	14°	410	9.17
4°	1433	2.63	15°	383	9.80
5°	1146	3.28	16°	359	10.49
6°	955	3.94	17°	338	11.11
7°	819	4.57	18°	320	11.78
8°	717	5.24	19°	303	12.41
9°	637	5.89	20°	288	13.06
10°	574	6.54			

To ascertain the radius corresponding to any degree, divide 5730 (the radius of a 1° curve) by the degree of the curve under consideration.

EXAMPLE.—Radius of a 5° curve = $\frac{5730}{5} = 1146$.

TABLE OF BOARD MEASURE.

FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
TIMBER OF DIFFERENT DIMENSIONS.

Width in Inches.	THICKNESS IN INCHES.												Width in Inches.
	1	1¼	1½	1¾	2	2¼	2½	2¾	3	3¼	3½	3¾	
¼	.020	.026	.031	.036	.041	.046	.052	.057	.062	.067	.072	.078	¼
½	.041	.052	.062	.072	.083	.093	.104	.114	.125	.135	.145	.156	½
¾	.062	.078	.093	.109	.125	.140	.156	.171	.187	.203	.218	.234	¾
1	.083	.104	.125	.145	.166	.187	.208	.229	.250	.270	.291	.312	1
1¼	.104	.130	.156	.182	.208	.234	.260	.286	.312	.338	.364	.390	1¼
1½	.125	.156	.187	.218	.250	.281	.312	.343	.375	.406	.437	.468	1½
1¾	.145	.182	.218	.255	.291	.328	.364	.401	.437	.474	.510	.546	1¾
2	.166	.208	.250	.291	.333	.375	.416	.458	.500	.541	.583	.625	2
2¼	.187	.234	.281	.328	.375	.421	.468	.515	.562	.609	.656	.703	2¼
2½	.208	.260	.312	.364	.416	.468	.520	.572	.625	.677	.729	.781	2½
2¾	.229	.286	.343	.401	.458	.515	.572	.630	.687	.744	.802	.859	2¾
3	.250	.312	.375	.437	.500	.562	.625	.687	.750	.812	.875	.937	3
3¼	.270	.338	.406	.473	.541	.609	.677	.744	.812	.880	.947	1.01	3¼
3½	.291	.364	.437	.510	.583	.656	.729	.802	.875	.947	1.02	1.09	3½
3¾	.312	.390	.468	.546	.625	.703	.781	.859	.937	1.01	1.09	1.17	3¾
4	.333	.416	.500	.583	.666	.750	.833	.916	1.00	1.08	1.16	1.25	4
4¼	.354	.442	.531	.619	.708	.796	.885	.974	1.06	1.15	1.24	1.34	4¼
4½	.375	.468	.562	.656	.750	.843	.937	1.03	1.12	1.21	1.31	1.40	4½
4¾	.395	.494	.593	.692	.791	.890	.989	1.08	1.18	1.28	1.38	1.48	4¾
5	.416	.520	.625	.729	.833	.937	1.04	1.14	1.25	1.35	1.45	1.56	5
5¼	.437	.546	.656	.765	.875	.984	1.09	1.20	1.31	1.42	1.53	1.64	5¼
5½	.458	.572	.687	.802	.916	1.03	1.14	1.26	1.37	1.49	1.60	1.72	5½
5¾	.479	.599	.718	.838	.958	1.07	1.19	1.31	1.43	1.55	1.67	1.80	5¾

TABLE OF BOARD MEASURE.

FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
TIMBER OF DIFFERENT DIMENSIONS.

Width in Inches.	THICKNESS IN INCHES.												Width in Inches.
	1	1¼	1½	1¾	2	2¼	2½	2¾	3	3¼	3½	3¾	
6	.500	.625	.750	.875	1.00	1.12	1.25	1.37	1.50	1.62	1.75	1.87	6
¾	.520	.651	.781	.911	1.04	1.17	1.30	1.43	0.56	1.69	1.82	1.95	¾
½	.541	.677	.812	.947	1.08	1.21	1.35	1.49	1.62	1.76	1.89	2.03	½
¼	.562	.703	.843	.984	1.12	1.26	1.40	1.54	1.68	1.82	1.96	2.10	¼
7	.583	.729	.875	1.02	1.16	1.31	1.45	1.60	1.75	1.89	2.04	2.18	7
¾	.604	.755	.906	1.05	1.20	1.35	1.51	1.66	1.81	1.96	2.11	2.26	¾
½	.625	.781	.937	1.09	1.25	1.40	1.56	1.71	1.87	2.03	2.18	2.34	½
¼	.645	.807	.968	1.13	1.29	1.45	1.61	1.77	1.93	2.09	2.26	2.42	¼
8	.666	.833	1.00	1.16	1.33	1.50	1.66	1.83	2.00	2.16	2.33	2.50	8
¾	.687	.859	1.03	1.20	1.37	1.54	1.71	1.89	2.06	2.23	2.40	2.57	¾
½	.708	.885	1.06	1.24	1.41	1.59	1.77	1.94	2.12	2.30	2.47	2.65	½
¼	.729	.911	1.09	1.27	1.45	1.64	1.82	2.00	2.18	2.37	2.55	2.73	¼
9	.750	.937	1.12	1.31	1.50	1.68	1.87	2.06	2.25	2.43	2.62	2.81	9
¾	.770	.963	1.15	1.34	1.54	1.73	1.92	2.12	2.31	2.50	2.69	2.89	¾
½	.791	.989	1.18	1.38	1.58	1.78	1.97	2.17	2.37	2.57	2.77	2.96	½
¼	.812	1.01	1.21	1.42	1.62	1.82	2.03	2.23	2.43	2.64	2.84	3.04	¼
10	.833	1.04	1.25	1.45	1.66	1.87	2.08	2.29	2.50	2.70	2.91	3.12	10
¾	.854	1.06	1.28	1.49	1.70	1.92	2.13	2.34	2.56	2.77	2.99	3.20	¾
½	.875	1.09	1.31	1.53	1.75	1.96	2.18	2.40	2.62	2.84	3.06	3.28	½
¼	.895	1.12	1.34	1.56	1.79	2.01	2.24	2.46	2.68	2.91	3.13	3.35	¼
11	.916	1.14	1.37	1.60	1.83	2.06	2.29	2.52	2.75	2.97	3.20	3.43	11
¾	.937	1.17	1.40	1.64	1.87	2.10	2.34	2.57	2.81	3.04	3.28	3.51	¾
½	.958	1.19	1.43	1.67	1.91	2.15	2.39	2.63	2.87	3.11	3.35	3.59	½
¼	.979	1.22	1.46	1.71	1.95	2.20	2.44	2.69	2.93	3.18	3.42	3.67	¼
12	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	12

TABLE OF BOARD MEASURE.

FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
TIMBER OF DIFFERENT DIMENSIONS.

Width in Inches.	THICKNESS IN INCHES.												Width in Inches.
	4	4½	4¾	4⅞	5	5¼	5½	5¾	6	6¼	6½	6¾	
0													
¼	.083	.088	.093	.099	.104	.109	.114	.119	.125	.130	.135	.140	¼
½	.166	.177	.187	.197	.208	.218	.229	.239	.250	.260	.270	.281	½
¾	.250	.265	.281	.296	.312	.328	.343	.359	.375	.390	.406	.421	¾
1	.333	.354	.375	.395	.416	.437	.458	.479	.500	.520	.541	.562	1
1¼	.416	.442	.468	.494	.520	.546	.572	.599	.625	.651	.677	.703	1¼
1½	.500	.531	.562	.593	.625	.656	.687	.718	.750	.781	.812	.843	1½
1¾	.583	.619	.656	.692	.729	.765	.802	.838	.875	.911	.947	.984	1¾
2	.666	.708	.750	.791	.833	.875	.916	.958	1.00	1.04	1.08	1.12	2
2¼	.750	.796	.843	.890	.937	.984	1.03	1.07	1.12	1.17	1.21	1.26	2¼
2½	.833	.885	.937	.989	1.04	1.09	1.14	1.19	1.25	1.30	1.35	1.40	2½
2¾	.916	.974	1.03	1.08	1.14	1.20	1.26	1.31	1.37	1.43	1.49	1.54	2¾
3	1.00	1.06	1.12	1.18	1.25	1.34	1.37	1.43	1.50	1.56	1.62	1.68	3
3¼	1.08	1.15	1.21	1.28	1.35	1.42	1.49	1.55	1.62	1.69	1.76	1.82	3¼
3½	1.16	1.24	1.31	1.38	1.45	1.53	1.60	1.67	1.75	1.82	1.89	1.96	3½
3¾	1.25	1.32	1.40	1.48	1.56	1.64	1.71	1.79	1.87	1.95	2.03	2.10	3¾
4	1.33	1.41	1.50	1.58	1.66	1.75	1.83	1.91	2.00	2.08	2.16	2.25	4
4¼	1.41	1.50	1.59	1.68	1.77	1.85	1.94	2.03	2.12	2.21	2.30	2.39	4¼
4½	1.50	1.59	1.68	1.78	1.87	1.96	2.06	2.15	2.25	2.34	2.43	2.53	4½
4¾	1.58	1.68	1.78	1.88	1.97	2.07	2.17	2.27	2.37	2.47	2.57	2.67	4¾
5	1.66	1.77	1.87	1.97	2.08	2.18	2.29	2.39	2.50	2.60	2.70	2.81	5
5¼	1.75	1.85	1.96	2.07	2.18	2.29	2.40	2.51	2.62	2.73	2.84	2.95	5¼
5½	1.83	1.94	2.06	2.17	2.29	2.40	2.52	2.63	2.75	2.86	2.97	3.09	5½
5¾	1.91	2.03	2.15	2.27	2.39	2.51	2.63	2.75	2.87	2.99	3.11	3.23	5¾

TABLE OF BOARD MEASURE.

FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
TIMBER OF DIFFERENT DIMENSIONS.

Width in Inches.	THICKNESS IN INCHES.												Width in Inches.
	4	4½	4¾	5	5¼	5½	5¾	6	6¼	6½	6¾		
6	2.00	2.12	2.25	2.37	2.50	2.62	2.75	2.87	3.00	3.12	3.25	3.37	6
¾	2.08	2.21	2.34	2.47	2.60	2.73	2.86	2.99	3.12	3.25	3.38	3.51	¾
½	2.16	2.30	2.43	2.57	2.70	2.84	2.97	3.11	3.25	3.38	3.52	3.65	½
¼	2.25	2.39	2.53	2.67	2.81	2.95	3.09	3.23	3.37	3.51	3.65	3.79	¼
7	2.33	2.47	2.62	2.77	2.91	3.06	3.20	3.35	3.50	3.64	3.79	3.93	7
¾	2.41	2.56	2.71	2.87	3.02	3.17	3.32	3.47	3.62	3.77	3.92	4.07	¾
½	2.50	2.65	2.81	2.96	3.12	3.28	3.43	3.59	3.75	3.90	4.06	4.21	½
¼	2.58	2.74	2.90	3.06	3.22	3.39	3.55	3.71	3.87	4.03	4.19	4.35	¼
8	2.66	2.83	3.00	3.16	3.33	3.50	3.66	3.83	4.00	4.16	4.33	4.50	8
¾	2.75	2.92	3.09	3.26	3.43	3.60	3.78	3.95	4.12	4.29	4.46	4.64	¾
½	2.83	3.01	3.18	3.36	3.54	3.71	3.89	4.07	4.25	4.42	4.60	4.78	½
¼	2.91	3.09	3.28	3.46	3.64	3.82	4.01	4.19	4.37	4.55	4.74	4.92	¼
9	3.00	3.18	3.37	3.56	3.75	3.93	4.12	4.31	4.50	4.68	4.87	5.06	9
¾	3.08	3.27	3.46	3.66	3.85	4.04	4.24	4.43	4.62	4.81	5.01	5.20	¾
½	3.16	3.36	3.56	3.76	3.95	4.15	4.35	4.55	4.75	4.94	5.14	5.34	½
¼	3.25	3.45	3.65	3.85	4.06	4.26	4.46	4.67	4.87	5.07	5.28	5.48	¼
10	3.33	3.54	3.75	3.95	4.16	4.37	4.58	4.79	5.00	5.20	5.41	5.62	10
¾	3.41	3.63	3.84	4.05	4.27	4.48	4.69	4.91	5.12	5.33	5.55	5.76	¾
½	3.50	3.71	3.93	4.15	4.37	4.59	4.81	5.03	5.25	5.46	5.68	5.90	½
¼	3.58	3.80	4.03	4.25	4.47	4.70	4.92	5.15	5.37	5.59	5.82	6.04	¼
11	3.66	3.89	4.12	4.35	4.58	4.81	5.04	5.27	5.50	5.72	5.95	6.18	11
¾	3.75	3.98	4.21	4.45	4.68	4.92	5.15	5.39	5.62	5.85	6.09	6.32	¾
½	3.83	4.07	4.31	4.55	4.79	5.03	5.27	5.51	5.75	5.99	6.22	6.46	½
¼	3.91	4.16	4.40	4.65	4.89	5.14	5.38	5.63	5.87	6.12	6.35	6.60	¼
12	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50	6.75	12

TABLE OF BOARD MEASURE.

FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
TIMBER OF DIFFERENT DIMENSIONS.

Width in Inches.	THICKNESS IN INCHES.												Width in Inches.
	7	7½	7¾	7⅞	8	8¼	8½	8¾	9	9¼	9½	9¾	
0													0
$\frac{1}{4}$.145	.151	.156	.161	.166	.171	.177	.182	.187	.192	.197	.203	$\frac{1}{4}$
$\frac{1}{2}$.291	.302	.312	.322	.333	.343	.354	.364	.375	.385	.395	.406	$\frac{1}{2}$
$\frac{3}{4}$.437	.453	.468	.484	.500	.515	.531	.546	.562	.578	.593	.609	$\frac{3}{4}$
1	.583	.604	.625	.645	.666	.687	.708	.729	.750	.770	.791	.812	1
$\frac{1}{4}$.729	.755	.781	.807	.833	.859	.885	.911	.937	.963	.989	1.01	$\frac{1}{4}$
$\frac{1}{2}$.875	.906	.937	.968	1.00	1.03	1.06	1.09	1.12	1.15	1.18	1.21	$\frac{1}{2}$
$\frac{3}{4}$	1.02	1.05	1.09	1.13	1.16	1.20	1.24	1.27	1.31	1.34	1.38	1.42	$\frac{3}{4}$
2	1.16	1.20	1.25	1.29	1.33	1.37	1.41	1.45	1.50	1.54	1.58	1.62	2
$\frac{1}{4}$	1.31	1.35	1.40	1.45	1.50	1.54	1.59	1.64	1.68	1.73	1.78	1.82	$\frac{1}{4}$
$\frac{1}{2}$	1.45	1.51	1.56	1.61	1.66	1.71	1.77	1.82	1.87	1.92	1.97	2.03	$\frac{1}{2}$
$\frac{3}{4}$	1.60	1.65	1.71	1.77	1.83	1.89	1.94	2.00	2.06	2.12	2.17	2.23	$\frac{3}{4}$
3	1.75	1.81	1.87	1.93	2.00	2.06	2.12	2.18	2.25	2.31	2.37	2.43	3
$\frac{1}{4}$	1.89	1.96	2.03	2.09	2.16	2.23	2.30	2.37	2.43	2.50	2.57	2.64	$\frac{1}{4}$
$\frac{1}{2}$	2.04	2.11	2.18	2.26	2.33	2.40	2.47	2.55	2.62	2.69	2.77	2.84	$\frac{1}{2}$
$\frac{3}{4}$	2.18	2.26	2.34	2.42	2.50	2.57	2.65	2.73	2.81	2.89	2.96	3.04	$\frac{3}{4}$
4	2.33	2.41	2.50	2.58	2.66	2.75	2.83	2.91	3.00	3.08	3.16	3.25	4
$\frac{1}{4}$	2.47	2.56	2.65	2.74	2.83	2.92	3.01	3.09	3.18	3.27	3.36	3.45	$\frac{1}{4}$
$\frac{1}{2}$	2.62	2.71	2.81	2.90	3.00	3.09	3.18	3.28	3.37	3.46	3.56	3.65	$\frac{1}{2}$
$\frac{3}{4}$	2.77	2.87	2.96	3.06	3.16	3.26	3.36	3.46	3.56	3.66	3.76	3.85	$\frac{3}{4}$
5	2.91	3.02	3.12	3.22	3.33	3.43	3.54	3.64	3.75	3.85	3.95	4.06	5
$\frac{1}{4}$	3.06	3.17	3.28	3.39	3.50	3.60	3.71	3.82	3.93	4.04	4.15	4.26	$\frac{1}{4}$
$\frac{1}{2}$	3.20	3.32	3.43	3.55	3.66	3.78	3.89	4.01	4.12	4.24	4.35	4.46	$\frac{1}{2}$
$\frac{3}{4}$	3.35	3.47	3.59	3.71	3.83	3.95	4.07	4.19	4.31	4.43	4.55	4.67	$\frac{3}{4}$

TABLE OF BOARD MEASURE.

FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
TIMBER OF DIFFERENT DIMENSIONS.

Width in Inches.	THICKNESS IN INCHES.												Width in Inches.
	7	7¼	7½	7¾	8	8¼	8½	8¾	9	9¼	9½	9¾	
6	3.50	3.62	3.75	3.87	4.00	4.12	4.25	4.37	4.50	4.62	4.75	4.87	6
¾	3.64	3.77	3.90	4.03	4.16	4.29	4.42	4.55	4.68	4.81	4.94	5.07	¾
½	3.79	3.92	4.06	4.19	4.33	4.46	4.60	4.74	4.87	5.01	5.14	5.28	½
¼	3.93	4.07	4.21	4.35	4.50	4.64	4.78	4.92	5.06	5.20	5.34	5.48	¼
7	4.08	4.22	4.37	4.52	4.66	4.81	4.95	5.10	5.25	5.36	5.54	5.68	7
¾	4.22	4.38	4.53	4.68	4.83	4.98	5.13	5.28	5.43	5.59	5.74	5.89	¾
½	4.37	4.53	4.68	4.84	5.00	5.15	5.31	5.46	5.62	5.78	5.93	6.09	½
¼	4.52	4.68	4.84	5.00	5.16	5.32	5.49	5.65	5.81	5.97	6.13	6.29	¼
8	4.66	4.83	5.00	5.16	5.33	5.50	5.66	5.83	6.00	6.16	6.33	6.50	8
¾	4.81	4.98	5.15	5.32	5.50	5.67	5.84	6.01	6.18	6.35	6.53	6.70	¾
½	4.95	5.13	5.31	5.49	5.66	5.84	6.02	6.19	6.37	6.55	6.72	6.90	½
¼	5.10	5.28	5.46	5.65	5.83	6.01	6.19	6.38	6.56	6.74	6.92	7.10	¼
9	5.24	5.43	5.62	5.81	6.00	6.18	6.37	6.56	6.75	6.93	7.12	7.31	9
¾	5.39	5.58	5.78	5.97	6.16	6.35	6.55	6.74	6.93	7.13	7.32	7.51	¾
½	5.54	5.74	5.93	6.13	6.33	6.53	6.72	6.92	7.12	7.32	7.52	7.71	½
¼	5.68	5.89	6.09	6.29	6.50	6.70	6.90	7.10	7.31	7.51	7.71	7.92	¼
10	5.83	6.04	6.25	6.45	6.66	6.87	7.08	7.29	7.50	7.70	7.91	8.12	10
¾	5.97	6.19	6.40	6.62	6.83	7.04	7.26	7.47	7.68	7.90	8.11	8.32	¾
½	6.12	6.34	6.56	6.78	7.00	7.21	7.43	7.65	7.87	8.09	8.31	8.53	½
¼	6.27	6.49	6.71	6.94	7.16	7.39	7.61	7.83	8.06	8.28	8.51	8.73	¼
11	6.41	6.64	6.87	7.10	7.33	7.56	7.79	8.02	8.25	8.47	8.70	8.93	11
¾	6.56	6.79	7.03	7.26	7.50	7.73	7.96	8.20	8.43	8.67	8.90	9.14	¾
½	6.70	6.94	7.18	7.42	7.66	7.90	8.14	8.38	8.62	8.86	9.10	9.34	½
¼	6.85	7.09	7.34	7.58	7.83	8.07	8.32	8.56	8.81	9.05	9.30	9.54	¼
12	7.00	7.25	7.50	7.75	8.00	8.25	8.50	8.75	9.00	9.25	9.50	9.75	12

TABLE OF BOARD MEASURE.

FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
TIMBER OF DIFFERENT DIMENSIONS.

Width in Inches.	THICKNESS IN INCHES.												Width in Inches.
	10	10¼	10½	10¾	11	11¼	11½	11¾	12	12¼	12½	12¾	
0													0
$\frac{1}{4}$.208	.213	.218	.224	.229	.234	.239	.244	.250	.255	.260	.265	$\frac{1}{4}$
$\frac{1}{2}$.416	.427	.437	.447	.458	.468	.479	.489	.500	.510	.520	.530	$\frac{1}{2}$
$\frac{3}{4}$.625	.640	.656	.671	.687	.703	.718	.734	.750	.765	.780	.795	$\frac{3}{4}$
1	.833	.854	.875	.895	.916	.937	.958	.979	1.00	1.02	1.04	1.06	1
$\frac{1}{4}$	1.04	1.06	1.09	1.12	1.14	1.17	1.19	1.22	1.25	1.27	1.30	1.33	$\frac{1}{4}$
$\frac{1}{2}$	1.25	1.28	1.31	1.34	1.37	1.40	1.43	1.46	1.50	1.53	1.56	1.59	$\frac{1}{2}$
$\frac{3}{4}$	1.45	1.49	1.53	1.56	1.60	1.64	1.67	1.71	1.75	1.78	1.82	1.85	$\frac{3}{4}$
2	1.66	1.70	1.75	1.79	1.83	1.87	1.91	1.95	2.00	2.04	2.08	2.12	2
$\frac{1}{4}$	1.87	1.92	1.96	2.01	2.06	2.10	2.15	2.20	2.25	2.29	2.34	2.38	$\frac{1}{4}$
$\frac{1}{2}$	2.08	2.13	2.18	2.24	2.29	2.34	2.39	2.44	2.50	2.55	2.60	2.65	$\frac{1}{2}$
$\frac{3}{4}$	2.29	2.34	2.40	2.46	2.52	2.57	2.63	2.69	2.75	2.80	2.86	2.91	$\frac{3}{4}$
3	2.50	2.56	2.62	2.68	2.75	2.81	2.87	2.93	3.00	3.06	3.12	3.18	3
$\frac{1}{4}$	2.70	2.77	2.84	2.91	2.98	3.04	3.11	3.18	3.25	3.31	3.38	3.45	$\frac{1}{4}$
$\frac{1}{2}$	2.91	2.99	3.06	3.13	3.20	3.28	3.35	3.42	3.50	3.57	3.64	3.72	$\frac{1}{2}$
$\frac{3}{4}$	3.12	3.20	3.28	3.35	3.43	3.51	3.59	3.67	3.75	3.82	3.90	3.98	$\frac{3}{4}$
4	3.33	3.41	3.50	3.58	3.66	3.75	3.83	3.91	4.00	4.08	4.16	4.25	4
$\frac{1}{4}$	3.54	3.63	3.71	3.80	3.89	3.98	4.07	4.16	4.25	4.33	4.42	4.51	$\frac{1}{4}$
$\frac{1}{2}$	3.75	3.84	3.93	4.03	4.12	4.21	4.31	4.40	4.50	4.59	4.68	4.77	$\frac{1}{2}$
$\frac{3}{4}$	3.95	4.05	4.15	4.25	4.35	4.45	4.55	4.65	4.75	4.84	4.94	5.04	$\frac{3}{4}$
5	4.16	4.27	4.37	4.47	4.58	4.68	4.79	4.89	5.00	5.10	5.20	5.31	5
$\frac{1}{4}$	4.37	4.48	4.59	4.70	4.81	4.92	5.03	5.14	5.25	5.35	5.46	5.56	$\frac{1}{4}$
$\frac{1}{2}$	4.58	4.69	4.81	4.92	5.04	5.15	5.27	5.38	5.50	5.61	5.72	5.83	$\frac{1}{2}$
$\frac{3}{4}$	4.79	4.91	5.03	5.15	5.27	5.39	5.51	5.63	5.75	5.87	5.99	6.11	$\frac{3}{4}$

TABLE OF BOARD MEASURE.

 FEET OF BOARD MEASURE CONTAINED IN ONE RUNNING FOOT OF
 TIMBER OF DIFFERENT DIMENSIONS.

Width in inches.	THICKNESS IN INCHES.												Width in inches.
	10	10½	10¾	10¾	11	11¼	11½	11¾	12	12¼	12½	12¾	
6	5.00	5.12	5.25	5.37	5.50	5.62	5.75	5.87	6.00	6.12	6.25	6.37	6
$\frac{1}{4}$	5.20	5.33	5.46	5.59	5.72	5.85	5.99	6.12	6.25	6.38	6.51	6.64	$\frac{1}{4}$
$\frac{1}{2}$	5.41	5.55	5.68	5.82	5.95	6.09	6.22	6.36	6.50	6.63	6.77	6.90	$\frac{1}{2}$
$\frac{3}{4}$	5.62	5.76	5.90	6.04	6.18	6.32	6.46	6.60	6.75	6.89	7.03	7.17	$\frac{3}{4}$
7	5.83	5.97	6.12	6.27	6.41	6.56	6.70	6.85	7.00	7.14	7.29	7.44	7
$\frac{1}{4}$	6.04	6.19	6.34	6.49	6.64	6.79	6.94	7.09	7.25	7.40	7.55	7.70	$\frac{1}{4}$
$\frac{1}{2}$	6.25	6.40	6.56	6.71	6.87	7.03	7.18	7.34	7.50	7.65	7.81	7.97	$\frac{1}{2}$
$\frac{3}{4}$	6.45	6.62	6.78	6.94	7.10	7.26	7.42	7.58	7.75	7.91	8.07	8.23	$\frac{3}{4}$
8	6.66	6.83	7.00	7.16	7.33	7.50	7.66	7.83	8.00	8.16	8.33	8.50	8
$\frac{1}{4}$	6.87	7.04	7.21	7.39	7.56	7.73	7.90	8.07	8.25	8.42	8.59	8.76	$\frac{1}{4}$
$\frac{1}{2}$	7.08	7.26	7.43	7.61	7.79	7.96	8.14	8.32	8.50	8.67	8.85	9.03	$\frac{1}{2}$
$\frac{3}{4}$	7.29	7.47	7.65	7.83	8.02	8.20	8.38	8.56	8.75	8.93	9.11	9.29	$\frac{3}{4}$
9	7.50	7.68	7.87	8.06	8.25	8.43	8.62	8.81	9.00	9.18	9.37	9.56	9
$\frac{1}{4}$	7.70	7.90	8.09	8.28	8.47	8.67	8.86	9.05	9.25	9.44	9.63	9.82	$\frac{1}{4}$
$\frac{1}{2}$	7.91	8.11	8.31	8.51	8.70	8.90	9.10	9.30	9.50	9.69	9.89	10.09	$\frac{1}{2}$
$\frac{3}{4}$	8.12	8.32	8.53	8.73	8.93	9.14	9.34	9.54	9.75	9.95	10.16	10.35	$\frac{3}{4}$
10	8.33	8.54	8.75	8.95	9.16	9.37	9.58	9.79	10.00	10.20	10.42	10.62	10
$\frac{1}{4}$	8.54	8.75	8.96	9.18	9.39	9.60	9.82	10.04	10.25	10.46	10.68	10.89	$\frac{1}{4}$
$\frac{1}{2}$	8.75	8.96	9.18	9.40	9.62	9.84	10.06	10.28	10.50	10.72	10.94	11.15	$\frac{1}{2}$
$\frac{3}{4}$	8.95	9.18	9.40	9.63	9.85	10.08	10.30	10.53	10.75	10.97	11.20	11.42	$\frac{3}{4}$
11	9.16	9.39	9.62	9.85	10.08	10.31	10.54	10.77	11.00	11.22	11.46	11.68	11
$\frac{1}{4}$	9.37	9.60	9.84	10.08	10.31	10.55	10.78	11.02	11.25	11.48	11.72	11.95	$\frac{1}{4}$
$\frac{1}{2}$	9.58	9.82	10.06	10.30	10.54	10.78	11.02	11.26	11.50	11.74	11.98	12.21	$\frac{1}{2}$
$\frac{3}{4}$	9.79	10.04	10.28	10.53	10.77	11.02	11.26	11.51	11.75	11.99	12.24	12.48	$\frac{3}{4}$
12	10.00	10.25	10.50	10.75	11.00	11.25	11.50	11.75	12.00	12.25	12.50	12.75	12

STANDARD BOX CAR.

DETAIL BILL OF MATERIAL IN BODY.

DIMENSIONS.

Length over end sills, 34 feet 8 inches.
Width over side sills, 8 feet 9 inches.
Height between sill and plate, 6 feet 9 inches.
Door opening, 5 feet 6 inches.
Capacity, 30 tons.
American continuous draft gear.
M. C. B. couplers.
Westinghouse air brakes.

LUMBER.

2 side sills, yellow pine,	5 in. x 9 in. x 33 ft. 9 in.....	275 feet.	
2 center sills, yellow pine,	5 in. x 9 in. x 33 ft. 9 in.....	275 "	
4 inter. " "	3½ in. x 9 in. x 33 ft. 9 in.....	393 "	
2 side plates, " "	3½ in. x 7 in. x 34 ft. 8 in.....	159 "	
1 ridge pole, " "	2 in. x 4 in. x 34 ft. 8 in.....	28 "	
2 purlins, " "	2 in. x 3 in. x 34 ft. 8 in.....	41 "	
1 ridge clamp, " "	1½ in. x 5½ in. x 34 ft. 8 in.....	36 "	
6 roof ribs, " "	1½ in. x 2½ in. x 34 ft. 8 in.....	72 "	
			1279 feet.
6 sub sills, short yellow pine,	5 in. x 5 in. x 6 ft. 6 in...	89 "	
2 end plates, " " "	3 in. x 14 in. x 8 ft. 9 in...	69 "	
4 brake girths " " "	4 in. x 9 in. x 1 ft. 1 in...	14 "	
5 cripple posts " " "	2½ in. x 4 in. x 7 ft.....	14 "	
2 door heads, " " "	1½ in. x 4½ in. x 5 ft. 6 in...	9 "	
1 " " " " "	1½ in. x 4 in. x 2 ft.....	2 "	
2 " stops, " " "	2 in. x 2½ in. x 7 ft.....	8 "	
1 " " " " "	2 in. x 2½ in. x 3 ft. 8 in...	2 "	
4 " track blocks, " " "	3 in. x 3½ in. x 10 in.	8 "	
24 grain strips, " " "	1½ in. x 3½ in. x 2 ft. 9 in...	41 "	
15 running board cleats, " " "	1½ in. x 2½ in. x 1 ft. 6 in...	9 "	
			265 feet.

STANDARD BOX CAR.

DETAIL BILL OF MATERIAL IN BODY.

LUMBER—CONTINUED.

2 end sills,	white oak,	7 in. x 9 in. x 8 ft. 9 in.....	101 feet.
4 draw timbers,	" "	5 in. x 8 in. x 8 ft.....	115 "
2 " " fillers,	" "	8 in. x 9 in. x 4 ft. 3 in.....	54 "
2 dead woods,	" "	5 in. x 9 in. x 2 ft. 8 in.....	22 "
4 corner posts,	" "	5 in. x 5 in. x 7 ft.....	64 "
4 door posts,	" "	4½ in. x 5 in. x 8 ft.....	66 "
4 transom posts,	" "	2½ in. x 5 in. x 7 ft.....	34 "
4 side posts,	" "	2½ in. x 4 in. x 7 ft.....	27 "
12 " braces,	" "	2½ in. x 6 in. x 8 ft.....	140 "
4 end posts,	" "	3 in. x 4 in. x 7 ft.....	32 "
4 " braces,	" "	3 in. x 4 in. x 7 ft. 3 in....	35 "
2 cross tie timbers,	" "	4½ in. x 10 in. x 8 ft. 9 in. ...	73 "
4 side belt rails,	" "	3 in. x 3½ in. x 14 ft. 1 in..	58 "
2 end " "	" "	3 in. x 4 in. x 8 ft. 2 in...	19 "
11 carlines,	" "	1½ in. x 10 in. x 8 ft. 9 in...	169 "
8 truss rod blocks,	" "	5 in. x 5 in. x 1 ft.....	20 "
2 king bolt "	" "	8½ in. x 9 in. x 9 in.....	8 "
1 cylinder block,	" "	3 in. x 14 in. x 1 ft. 7 in...	7 "
1 reservoir "	" "	3 in. x 4 in. x 1 ft. 7 in...	2 "
2 door track strips,	" "	1½ in. x 1½ in. x 11 ft. 5 in..	8 "
4 brake beams,	" "	3½ in. x 6 in. x 6 ft.....	50 "
			<hr/> 1104 feet.
78 floor plank, yellow pine,	1½ in. x 6 in. x 8 ft. 9 in.....		700 "
Lining,	" " ¾ in. x 5½ in.....		287 "
Siding,	white pine,	¾ in. x 5½ in. 8 ft.....	868 "
Roofing,	" "	¾ in. x 5½ in. 5 ft.....	400 "
Fascia, etc.,	" "	144 "

STANDARD BOX CAR.

DETAIL BILL OF MATERIAL IN BODY.

CASTINGS.

2 center plates	172 lbs.
4 side bearings.....	110 "
8 transom thimbles	17 "
4 draft timber keys	24 "
4 drawbar guides.....	23 "
8 truss rod queen posts.....	100 "
8 " " saddles	25 "
4 " " washers (square)	38 "
4 " " " (round)	19 "
1 brake wheel	19 "
1 " ratchet	6 "
1 " pawl	2 "
2 " mast guides.....	10 "
4 side door hangers	22 "
4 " " guides	32 "
2 " " stops and handles	10 "
2 end " stops and shoes.....	7 "
3 " " track blocks.....	7 "
20 floor washers	40 "
24 small "	22 "
4 pin lifter brackets	12 "
8 brake heads	160 "
8 " shoes	140 "
4 " beam fulcrums	34 "
4 " " washers.....	42 "
	<hr/> 1093 lbs.

STANDARD BOX CAR.

DETAIL BILL OF MATERIAL IN BODY.

FORGINGS.

2 body bolster top bars,	$\frac{7}{8}$ in. x 8 in. 8 ft. 9 in.....	452 lbs.
2 " " bottom bars,	1 in. x 8 in. 8 ft. 2 in.....	440 "
4 " truss rods,	$1\frac{1}{2}$ in. rd. x 36 ft. 4 in.....	576 "
2 draft rods, American continuous,	$1\frac{1}{2}$ in. x 31 ft. 6 in.....	304 "
2 " keys, " "	1 in. x 5 in. x 2 ft. 1 in.....	64 "
2 followers, " "	$1\frac{1}{2}$ in. x 6 in. x $11\frac{1}{2}$ in.....	55 "
4 angle irons, " "	1 in. x $1\frac{1}{2}$ in. x 1 ft. $2\frac{1}{2}$ in....	20 "
2 tail bolts, " "	$1\frac{3}{4}$ in. x 1 ft. 6 in....	24 "
4 chafe irons, " "	$\frac{1}{2}$ in. x 4 in. x $10\frac{1}{2}$ in.....	11 "
2 pin lifters,	1 in.....	32 "
2 dead wood plates (face),	$\frac{3}{4}$ in. x 6 in. x 2 ft. 8 in.....	81 "
2 " " " (bottom),	$\frac{3}{4}$ in. x 5 in. x 1 ft. 7 in.....	40 "
1 carry iron, brake step,	1 in. x 3 in. x 3 ft.....	28 "
1 " " "	1 in. x 3 in. x 2 ft.....	18 "
2 king bolts,	$1\frac{3}{4}$ in. x 2 ft. 8 in.....	42 "
2 " " plates,	$\frac{1}{2}$ in. x 5 in. x 5 in.....	2 "
1 brake mast,	$1\frac{1}{2}$ in. x 11 ft. 10 in.....	50 "
4 " block rods,	$\frac{5}{8}$ in. x 1 ft. $6\frac{1}{2}$ in.....	6 "
4 running board brackets,	$\frac{3}{8}$ in. x $1\frac{1}{2}$ in. x 1 ft. 1 in....	9 "
2 sill steps,	$\frac{3}{8}$ in. x 2 in. x 2 ft. 10 in....	15 "
16 grab irons,	$\frac{5}{8}$ in. x 2 ft. 8 in.....	45 "
2 side door thresholds,	$\frac{1}{2}$ in. x 4 in. x 5 ft. 6 in..	36 "
2 " " tracks,	$\frac{3}{8}$ in. x $2\frac{1}{2}$ in. x 11 ft. 5 in..	68 "
4 " " rub strips,	$\frac{1}{2}$ in. x 1 in. x 5 ft. 6 in..	14 "
1 end " threshold,	$\frac{1}{2}$ in. x 4 in. x 2 ft.	7 "
2 " " tracks,	$\frac{1}{2}$ in. x $2\frac{1}{2}$ in. x 4 ft. 6 in..	20 "

Amount carried forward.....

2459 lbs.

Total weight of body bolts

316 lbs.

STANDARD BOX CAR.

DETAIL BILL OF MATERIAL IN BODY.

FORGINGS—CONTINUED.

Amount brought forward.....			2459 lbs.
8 corner bands,	$\frac{3}{8}$ in. x $2\frac{1}{2}$ in. x 1 ft. 6 in.....	36 lbs.	
7 roof rods,	$\frac{3}{8}$ in. x 9 ft. 2 in.....	64 "	
30 post and side rods,	$\frac{3}{4}$ in.....	314 "	
30 " rod washers,	$\frac{1}{4}$ in. x $2\frac{1}{2}$ in. x $2\frac{1}{2}$ in.....	12 "	
			462 lbs.
8 brake shoe keys,	$\frac{1}{2}$ in. x $\frac{7}{8}$ in. x $9\frac{1}{2}$ in.....	8 lbs.	
8 " beam guides,	$\frac{7}{8}$ in. x 1 ft. 2 in.....	18 "	
8 " " truss rods,	$\frac{3}{8}$ in. x 6 ft. $4\frac{1}{2}$ in.....	48 "	
4 " " fulcrums,	$\frac{3}{4}$ in. x $2\frac{1}{2}$ in. x 1 ft. 10 in.....	36 "	
8 " hangers,	$\frac{7}{8}$ in. x 1 ft. 6 in.....	52 "	
8 " " eyes,	1 in. x 1 ft. 4 in.....	26 "	
8 " safety chains and eyes,	$\frac{1}{2}$ in. x 4 ft. 2 in.....	33 "	
2 dead lever anchors,	$\frac{7}{8}$ in. x 2 ft. 4 in.....	34 "	
1 push rod and jaws,	$1\frac{1}{8}$ in. x 2 ft. 8 in.....	22 "	
2 top rods " "	$\frac{3}{4}$ in. x 9 ft. 6 in.....	59 "	
1 cylinder rod and jaws,	$\frac{3}{4}$ in. x 7 ft. 6 in.....	26 "	
1 hand rod " "	$\frac{3}{4}$ in. x 11 ft. 2 in.....	24 "	
2 bottom rods " "	$\frac{7}{8}$ in. x 5 ft.....	50 "	
2 release rods,	$\frac{3}{8}$ in. x 4 ft. 9 in.....	3 "	
2 live levers,	1 in. x $3\frac{3}{4}$ in. x 2 ft. 6 in.....	58 "	
2 dead levers,	1 in. x $3\frac{3}{4}$ in. x 2 ft.....	44 "	
1 cylinder lever,	1 in. x $3\frac{1}{2}$ in. x 2 ft. 11 in.....	32 "	
1 reservoir " "	1 in. x $3\frac{1}{2}$ in. x 2 ft. 8 in.....	28 "	
1 " fulcrum,	$\frac{1}{2}$ in. x $2\frac{1}{2}$ in. x 3 ft. 4 in.....	14 "	
3 lever guides,	1 in. x 3 ft. $7\frac{1}{2}$ in.....	27 "	
19 connection pins,	$1\frac{1}{8}$ in. x $4\frac{1}{2}$ in.....	21 "	
5 pipe clamps and hangers,	$\frac{1}{2}$ in. x $1\frac{1}{2}$ in.....	13 "	
			676 lbs.
			3561 lbs.
Rough weight of iron			3743 "

STANDARD BOX CAR.

DETAIL BILL OF MATERIAL in BODY.

SUMMARY.

Long yellow pine.....	1279 feet.
Short " "	265 "
Oak.....	1104 "
Flooring, yellow pine.....	700 "
Lining " "	287 "
Siding, white pine.....	868 "
Roofing, " "	400 "
Fascia, etc., white pine.....	144 "
Wrought iron forgings.....	3743 lbs.
" " bolts.....	316 "
Cast iron.....	1093 "
Couplers, M. C. B.....	2
Draw springs.....	2
Brake chain	3 lbs.
Turnbuckles, Cleveland.....	4
Door locks "	3
Corner irons, pressed steel.....	4
Chicago roof, iron.....	1
Air brake equipment	1
Train pipe and fittings.	
Square nuts.....	121 lbs.
Wrought washers	20 "
Wire nails.....	84 "
Screws	1 gross
Paint material	11 gals.
Labor.	

STANDARD FLAT CAR.

DETAIL BILL OF MATERIAL IN BODY.

DIMENSIONS.

Length over end sills, 34 feet 8 inches.

Width over side sills, 8 feet 9 inches.

Capacity.

American continuous draft gear.

M. C. B. couplers.

Westinghouse air brakes.

LUMBER.

2 side sills, yellow pine,	5 in. x 12 in. x 35 ft.....	375 feet.	
2 center sills, " "	5 in. x 9 in. x 33 ft. 9 in.....	275 "	
4 inter. " " "	3½ in. x 9 in. x 33 ft. 9 in.....	393 "	
			1043 feet.
2 cross ties, short yellow pine,	4½ in. x 10 in. x 9 ft.....	73 "	
6 sub sills, " " "	5 in. x 5 in. x 6 ft. 9 in.....	91 "	
4 truss blocks, " " "	5 in. x 5 in. x 4 ft. 6 in.....	10 "	
4 " " " " "	5 in. x 5 in. x 3 ft.....	7 "	
4 brake " " " " "	4 in. x 9 in. x 4 ft. 6 in.....	15 "	
			196 feet.
2 end sills, white oak,	7 in. x 9 in. x 9 ft. 6 in....	112 "	
4 draw timbers, " " "	5 in. x 8 in. x 8 ft.....	116 "	
2 dead woods, " " "	6 in. x 8 in. x 2 ft. 9 in....	24 "	
2 draw timber fillers, " " "	8 in. x 9 in. x 4 ft. 5 in....	56 "	
2 king bolt blocks, " " "	8 in. x 8½ in. x 10 in.....	10 "	
4 brake beams, " " "	3½ in. x 6 in. x 6 ft.....	50 "	
			368 feet.
Long yellow pine		1043 "	
Short " "		196 "	
Flooring, yellow pine		700 "	
White oak.....		318 "	

STANDARD FLAT CAR.

DETAIL BILL OF MATERIAL IN BODY.

CASTINGS.

2 center plates	172 lbs.
4 side bearings.....	110 "
8 transom thimbles	18 "
8 draw timber keys	40 "
4 drawbar guides.....	16 "
8 truss rod queen posts.....	104 "
8 " " saddles	24 "
8 " " washers.....	36 "
1 brake wheel	19 "
1 " ratchet	6 "
1 " pawl	2 "
8 " heads	160 "
8 " shoes	140 "
8 " beam washers.....	32 "
4 " " saddles.....	36 "
28 floor washers	52 "
4 $\frac{3}{4}$ -inch "	8 "
	<hr/> 975 lbs.

STANDARD FLAT CAR.

DETAIL BILL OF MATERIAL IN BODY.

FORGINGS.

2 body bolster top bars,	$\frac{3}{4}$ in. x 8 in. 9 ft. 3 in.....	370 lbs.
2 " " bottom bars,	1 in. x 8 in. 9 ft. 11 $\frac{1}{2}$ in....	425 "
4 truss rods,	1 $\frac{1}{2}$ in. x 36 ft. 4 in.....	481 "
2 draft rods, American continuous,	1 $\frac{1}{4}$ in. x 33 ft. 11 in.....	304 "
2 " keys, " "	1 in. x 5 in. x 2 ft. 1 in....	64 "
2 followers, " "	1 $\frac{1}{2}$ in. x 6 in. x 11 $\frac{1}{2}$ in.....	55 "
4 angle irons, " "	1 in. x 1 $\frac{1}{2}$ in. x 1 ft. 2 $\frac{1}{2}$ in..	20 "
2 tail bolts, " "	1 $\frac{3}{4}$ in. x 1 ft. 6 in... ..	24 "
4 chafe irons, " "	$\frac{1}{2}$ in. x 4 in. x 10 $\frac{1}{2}$ in.....	12 "
2 pin lifters,	1 in.....	32 "
2 dead wood plates (face),	$\frac{3}{4}$ in. x 6 in. x 2 ft. 8 in....	81 "
2 " " " (bottom),	$\frac{3}{4}$ in. x 5 in. x 1 ft. 7 in....	40 "
1 carry iron, brake step,	1 in. x 3 in. x 3 ft.....	28 "
1 " " "	1 in. x 3 in. x 2 ft.....	18 "
2 king bolts,	1 $\frac{1}{4}$ in. x 2 ft. 8 in.....	42 "
2 " " plates,	$\frac{1}{2}$ in. x 5 in. x 5 in.....	2 "
1 brake mast,	1 $\frac{1}{2}$ in.....	21 "
4 " block rods,	$\frac{5}{8}$ in. x 1 ft. 6 $\frac{1}{2}$ in.....	6 "
1 " pawl plate,	$\frac{1}{2}$ in. x 3 in. x 11 in.....	2 "
2 sill tie rods,	$\frac{3}{4}$ in. x 8 ft. 11 $\frac{1}{2}$ in.....	27 "
8 truss rod pins,	$\frac{5}{8}$ in. x 6 in.....	2 "
22 stake pocket U-bolts,	$\frac{3}{4}$ in. x 2 ft. 4 in.....	80 "
18 " " " plates,	$\frac{1}{4}$ in. x 3 in. x 4 in.....	34 "
		2170 lbs.

STANDARD FLAT CAR.

DETAIL BILL OF MATERIAL IN BODY.

FORGINGS—CONTINUED.

Amount brought forward.....		2170 lbs.
8 brake shoe keys,	$\frac{1}{2}$ in. x $\frac{7}{8}$ in. x $9\frac{1}{2}$ in.....	8 lbs.
8 " beam guides,	$\frac{7}{8}$ in. x 1 ft. 2 in.....	18 "
8 " " truss rods,	$\frac{3}{8}$ in. x 6 ft. $4\frac{1}{2}$ in.....	48 "
4 " " fulcrums,	$\frac{3}{4}$ in. x $2\frac{1}{2}$ in. x 1 ft. 10 in.....	36 "
8 " hangers,	$\frac{7}{8}$ in. x 1 ft. 6 in.....	52 "
8 " " eyes,	1 in. x 1 ft. 4 in.....	26 "
8 " safety chains and eyes,	$\frac{1}{2}$ in. x 4 ft. 2 in.....	33 "
2 dead lever anchors,	$\frac{7}{8}$ in. x 2 ft. 4 in.....	34 "
1 push rod and jaws,	$1\frac{1}{8}$ in. x 2 ft. 8 in.....	22 "
2 top rods " "	$\frac{3}{4}$ in. x 9 ft. 6 in.....	59 "
1 cylinder rod and jaws,	$\frac{3}{4}$ in. x 7 ft. 6 in.....	26 "
1 hand rod " "	$\frac{3}{4}$ in. x 11 ft. 2 in.....	24 "
2 bottom rods " "	$\frac{7}{8}$ in. x 5 ft.....	50 "
2 release rods,	$\frac{3}{8}$ in. x 4 ft. 9 in.....	3 "
2 live levers,	1 in. x $3\frac{3}{4}$ in. x 2 ft. 6 in.....	58 "
2 dead levers,	1 in. x $3\frac{3}{4}$ in. x 2 ft.....	44 "
1 cylinder lever,	1 in. x $3\frac{1}{2}$ in. x 2 ft. 11 in.....	32 "
1 reservoir "	1 in. x $3\frac{1}{2}$ in. x 2 ft. 8 in.....	28 "
1 " lever fulcrum,	$\frac{1}{2}$ in. x $2\frac{1}{2}$ in. x 3 ft. 4 in.....	14 "
3 lever guides,	1 in. x 3 ft. $7\frac{1}{2}$ in.....	27 "
19 connection pins,	$1\frac{1}{8}$ in. x $4\frac{1}{2}$ in.....	21 "
5 pipe clamps and hangers,	$\frac{1}{2}$ in. x $1\frac{1}{2}$ in.....	13 "
		676 lbs.
		2846 lbs.
Total weight of body bolts.....		260 "

STANDARD FLAT CAR.**DETAIL BILL OF MATERIAL IN BODY.****SUMMARY.**

Long yellow pine	1043 feet.
Short " "	196 "
White oak.....	368 "
Flooring, yellow pine.....	700 "
Wrought iron forgings.....	2846 lbs.
" " bolts.....	260 "
Cast iron.....	975 "
Couplers, M. C. B.....	2
Draw springs.....	2
Turnbuckles, Cleveland.....	4
Brake chain	3 lbs.
Air brake equipment	1
Train pipe and fittings.....	
Square nuts.....	81 lbs.
Wrought washers	19 "
Wire nails.....	40 "
Paint material	1½ gal.
Labor.....	

COAL CAR.**EXTRA MATERIAL REQUIRED FOR 42-INCH COAL SIDES.**

Side plank, yellow pine	893 feet.
" stakes, white oak.....	185 "
Wrought iron	283 lbs.
Square nuts.....	26 "
Wrought washers	9 "
Paint material	3 gals.
Labor on side plank.....	

ONE PAIR OF STANDARD TRUCKS.

60,000 POUNDS CAPACITY, RIGID TRUCKS.

2 truck bolsters,	9 inches x 12 inches x 7 feet 6 inches.....	148 feet.
2 " spring plank, 5	" x 12 " x 7 " 6 "	82 "
4 top arch bars,	1½ inches x 4 inches x 6 feet 4 inches.	392 lbs.
4 bottom arch bars,	1½ " x 4 " x 6 " 10 "	388 "
4 tie bars,	½ " x 4 " x 6 "	188 "
4 bolster truss rods,	1½ " x 8 feet 4 inches.....	108 "
8 oil boxes, M. C. B.....		704 "
8 truck columns.....		332 "
8 " " guides.....		84 "
2 center plates.....		146 "
4 side bearings.....		79 "
4 truss rod saddles		95 "
4 " " end plates.....		84 "

SUMMARY.

White oak lumber	230 feet.
Wrought iron forgings.....	1156 lbs.
" " bolts	201 "
Square nuts	44 "
Cast iron	1524 "
Wheels, M. C. B., 600 lbs., 33 inches.....	4800 "
Axles, " " " 4 inch x 7 inch journal	1860 "
Brasses, " " " 4 " x 7 inch, solid.....	100 "
Oil box wedges, malleable	56 "
" " covers, pressed steel.	
Bolster springs, Pennsylvania Y.	
Oil and waste.	
Labor.	

ONE PAIR OF STANDARD TRUCKS.

SWING MOTION, 50,000 POUNDS CAPACITY, CHANNEL BARS.

LUMBER.

2 truck bolsters,	9 inches x 11½ inches x 5 feet 4 inches.	99 feet.	
2 " spring plank,	3 " x 11 " x 5 " 4 "	33 "	
8 dust guards,	5 " x 6 " x 9½ inches	3 "	135 feet.

CASTINGS.

8 oil boxes	626 lbs.	
8 " " covers, "Hewitt".....	50 "	
4 hanger bearings, bottom.....	50 "	
4 " "	57 "	
8 chafe plates.....	62 "	845 lbs.

MALLEABLE CASTINGS.

4 truck ends.....	280 lbs.	
2 center plates.....	70 "	
4 side bearings.....	40 "	
8 hanger pin bearings, top.....	38 "	
8 oil box wedges.....	34 "	462 lbs.

FORGINGS.

4 top arch bars,	1½ inches x 4 inches x 6 feet.....	349 lbs.	
4 bottom arch bars,	1 " x 4 " x 6 "	331 "	
4 tie bars,	½ " x 4 " x 6 "	154 "	
4 swing hangers,	¾ " x 4 " x 6 "	168 "	
4 " " pins,	1½ " x 1½ " x 2 " 2 inches ...	72 "	1074 lbs.

BOLTS.

8 arch bar and truck ends,	1 inch x 1 foot 6 inches.....	33 lbs.	
16 " " " oil boxes,	1 " x 1 " 2 "	54 "	
8 bolster and center plates,	¾ " x 11½ inches.....	13 "	
8 " " side bearings,	5 " x 9½ "	7 "	
16 " " chafe plates,	½ " x 3 "	2 "	109 lbs.
72 rivets for channel bars,	¾ inch x 2½ inches.....	31 "	

ONE PAIR OF STANDARD TRUCKS.

SWING MOTION, 50,000 POUNDS CAPACITY, CHANNEL BARS.

SUMMARY.

Lumber, white oak.....	135 feet.
Cast iron.....	845 lbs.
Malleable castings.....	462 "
Wrought iron forgings.....	1074 "
" " bolts.....	109 "
" " rivets.....	31 "
Cast wheels, 33 inches, 600 lbs.....	4800 "
Scrap axles, journal 4 inches x 7 inches, ctr. 4½ inches.....	1525 "
Brasses, solid.....	76 "
Channel bars, ½ inch x 10½ inches x 6 feet 7 inches.....	568 "
Bolster springs, Pennsylvania W.....	259 "
Square nuts.....	51 "
Hexagon nuts.....	24 "
Washers, ¾-inch.....	½ "
Lag screws, ½ inch x 3½ inches.....	8
Flat-head screws, 2½-inch, No. 18.....	16
Cotters, ⅝ inch x 2½ inches.....	8
Split keys, ½ " x 2½ ".....	14
Oil, lubricating.....	6½ gal.
Cotton waste.....	13 lbs.
Paint material.....	1 qt.
Labor.....	

INDEX.

	PAGE.
Air, expansion of.....	35
Air Brakes, cost of application to freight cars.....	88
Air Brakes, repair prices, "Westinghouse," for freight cars.....	89-91
Air Brakes, repair prices, "Westinghouse," for passenger cars.....	40-41
Air Brakes, standard forgings, freight, weight and cost of.....	86
Air Brakes, standard forgings, passenger, weight and cost of.....	38-39
Angles, car truck, sizes and weights of.....	124
Apothecaries' Weight, table of.....	104
Arch Bars, freight truck, weight and cost of.....	93
Areas and Circumferences of Circles.....	131-137
Average amount of material and cost of freight doors.....	80
Average amount of material and cost of passenger doors.....	12
Average amount of material and cost of freight roofs.....	79
Average cost of repairs to freight cars.....	71-80
Average cost of repairs to passenger cars.....	1-25
Average weights and prices of material in freight cars.....	81-87
Average weights and prices of material in passenger cars.....	37-39
Avoirdupois Weight, table of.....	105
Axles and Wheels, M. C. B., cost of.....	96-97
Axles, M. C. B., weight and cost of.....	93
Baggage and Mail Cars, cost of repairs.....	2
Baker Heater, bill of material and cost of.....	36
Bar Iron, flat, sizes and weights of.....	119
Bar Iron, square and round, sizes and weights of.....	120
Bends in Water Pipes.....	35
Bissell Wedge, weight and cost of.....	82
Blinds, coach, cost of.....	20
Board Measure, table of.....	140-147
Body Bolsters, freight, weights and costs of.....	73-82
Body Hand Rails, coach, weights and costs of.....	4-5, 49
Body Hand Rails, caboose, weights and costs of.....	69
Body Rods and Bolts, freight, weight and cost of.....	81
Bolsters, body, weight and cost of.....	73-82
Bolsters, truck, weight and cost of.....	92
Bolts, square heads and nuts, sizes and weights of.....	128
Bolt Heads and Nuts, weights of.....	127
Box Cars, detail bill of.....	149-154
Box Cars, cost of repairs.....	71-80

INDEX—CONTINUED.

	PAGE.
Box Cars, settlement prices for destroyed cars.....	98-100
Boxes, capacity of.....	108
Brake Beams, metal, cost of.....	86-95
Brake Beams, wood, plain, cost of.....	87-95
Brake Beams, wood, trussed, cost of.....	88-95
Brake Leverage, diagram.....	42-45
Brake Rigging, freight, hand, weight and cost of.....	37
Brake Rigging, freight, standard forgings, weight and cost of.....	86
Brake Rigging, passenger, standard forgings, weight and cost of.....	38-39
Brass, sheet, gauge and weight of.....	121-123
Brass Bearings, M. C. B., weight and cost of.....	94
Burning Paint off Passenger Cars, cost of.....	2, 38
Butler Draft Gear, weight and cost of.....	82
Caboose Platforms, detail bill of material.....	70
Caboose Trucks, detail bill of material.....	67-69
Canvas Roof, coaches, cost of.....	2
Capacity of Boxes.....	108
Capacity of Cisterns and Tanks.....	110
Capacity, carrying, of car springs.....	130
Car Brake Levers, diagram.....	42
Car Doors, freight, detail bill and cost of.....	80
Car Doors, passenger, detail bill and cost of.....	12
Car Heating, cost of.....	33-36
Car Lighting, cost of.....	36-54
Car Piping.....	35
Car Roofs, comparative cost of.....	79
Car Truck Angles, sizes and weights of.....	124
Car Truck Channels, sizes and weights of.....	124
Cars Destroyed, settlement prices.....	98-100
Cars Destroyed, table of depreciated values.....	100
Castings, shrinkage of.....	113
Castings, weight, by weight of pine pattern.....	113
Castings, in car body, freight.....	85, 151, 156
Castings, in car body, passenger.....	50-51
Castings, in car trucks, freight.....	94-95, 160
Castings, in car trucks, passenger.....	60, 65
Castings, in car trucks, caboose.....	68
Center Sills, freight, cost of repairs.....	71-73, 75
Center Plates, freight, weight and cost of.....	85
Channel Bars, sizes and weights of.....	124
Channel Bar Trucks, bill of material of.....	161-162
Circumference of Circles.....	131-137
Closet, house, cost of.....	17
Coach, detail bill of material.....	46-57
Coach, seats, sash, blinds and curtains, cost of.....	18-22
Coal Car, body repairs, cost of.....	75
Coal Car, sides, bill of material of.....	159
Comparative Cost of Car Doors, freight.....	80
Comparative Cost of Car Roofs, freight.....	79

INDEX—CONTINUED.

	PAGE.
Comparative Cost of Painting Coaches.....	32
Contract Labor on Wheels and Axles.....	97
Cooler, water, bill of material and cost of.....	17
Copper, sheet, gauge and weight of.....	121-123
Copper, flashing for coach roofs, cost of.....	2
Corner Irons, weight and cost of.....	84
Corner and Door Posts, freight, cost of.....	77-78
Corner and Door Posts, passenger, cost of.....	3
Cost of Brake Beams.....	86-93
Cost of Curtains, coach.....	20, 54
Cost of Doors, freight.....	30
Cost of Doors, coach.....	12
Cost of Inside Repairs to Coaches.....	12-24
Cost of Painting Coaches.....	24-32
Cost of Repairs to Coaches.....	1-25
Cost of Repairs to Freight Cars.....	71-81
Cost of Roofs for Freight Cars.....	79
Cost of Seat Frames, Cushions and Backs.....	21-22
Cost of Standard Air Brakes Applied to Freight Cars.....	88
Cost of Standard Miller Platforms Applied to Passenger Cars.....	6-7
Cost of Standard Janney-Miller Platforms Applied to Passenger Cars.....	8-11
Cost of Vestibules Applied to Cars.....	4
Cost of Steam Heating.....	36, 54
Cost of Sash, Blinds and Deck Sash.....	18-20
Couplers, M. C. B., weight and cost of.....	101
Cubic Measure, table of.....	107
Curves, railway, degree and radius of.....	139
Decimals of an Inch for each one-sixty-fourth.....	138
Deck Sash, cost of.....	18
Depreciated Value of \$100.....	100
Destroyed Cars, settlement prices.....	98-100
Detail Bill of Material for a Box Car.....	149-154
Detail Bill of Material for Coal Car Sides.....	59
Detail Bill of Material for Caboose Platform.....	70
Detail Bill of Material for Caboose Trucks.....	67-69
Detail Bill of Material for a Flat Car.....	155-159
Detail Bill of Material for a Passenger Car.....	46-57
Detail Bill of Material for a Platform, Miller.....	6-7
Detail Bill of Material for a Platform, Janney-Miller.....	8-11
Detail Bill of Material for Trucks, freight.....	163-162
Detail Bill of Material for Trucks, passenger.....	58-66
Diagram of Brake Leverage.....	42
Doors, bill of material and cost of, freight.....	80
Doors, bill of material and cost of, coach.....	12
Door and Corner Posts, coach, cost of repairs.....	3
Door and Corner Posts, freight, cost of repairs.....	77-78
Draft Rigging, cost of repairs.....	76
Draft Timber, cost of repairs.....	74-76
Draw Bars, cast and malleable, weight and cost of.....	85

INDEX—CONTINUED.

	PAGE.
Draw Pockets and Followers, weight and cost of.....	83
Dry Measure, table of.....	107
Double Sash, coach, bill of material and cost of.....	19
Double Blinds, coach, bill of material and cost of.....	20
End of Car, freight, cost of repairs.....	77
End of Car, passenger, cost of repairs.....	5, 12
End Doors, freight, bill of material and cost of.....	80
End Doors, coach, bill of material and cost of.....	12
End Doors, casing, coach, bill of material and cost of.....	12
End Gates, coal car, cost of.....	75
End Lining, box car, cost of.....	78
End Posts, box car, cost of.....	77
End Plate, box car, cost of.....	77
End Plank, coal car, cost of.....	75
End Sills, freight, cost of repairs.....	75-77
End Sills, passenger, cost of repairs.....	3
Expansion of Air.....	35
Flat Bar Iron, sizes and weights of.....	119
Flat Car, detail bill of material.....	155-159
Floor Frame, freight car, cost of repairs.....	71-75
Flooring, freight car, cost of repairs.....	74
Finish, coach, inside, cost of.....	12-25
Forgings, standard, passenger brakes.....	38-39
Forgings, standard, freight brakes.....	86
Forgings, standard, freight trucks.....	160-162
Forgings, standard, passenger trucks.....	58-59, 62-63
Forgings, standard, caboose trucks.....	66-67
Forgings, standard, passenger body.....	48-50
Forgings, standard, box car body.....	152-153
Forgings, standard, flat car body.....	157-158
Forgings, standard, Miller platforms.....	6, 49
Forgings, standard, caboose platforms.....	70
Franklin Institute, standard bolt heads and nuts.....	127
Freight Brake Equipment.....	86-91
Freight Cars, bills of material.....	149-162
Freight Car Repairs, cost of.....	71-80
Freight Truck Repairs, cost of.....	92-95
Frost Lights, cost of.....	54
Galvanized Iron, gauge and weight of.....	124
General Rules for Determining the Weights of Iron.....	118
Gents' Saloon, cost of.....	13
Gear Brakes, cost of.....	4
Glass, coach, cost of.....	54
Grab Handles, cost of.....	84
Gravity, specific, of liquids.....	110
Gravity, specific, of wrought iron, steel, copper and brass.....	123
Green Logs, weight per 1,000 feet board measure.....	112
Graham Draft Gear.....	82

INDEX—CONTINUED

	PAGE.
Hand Railing, coach, cost of.....	4, 5, 49
Hand Railing, caboose, cost of.....	70
Headlining, oak, cost of.....	23
Heating, hot water.....	33-35
Heating, steam	36
Helical Springs, sizes, weights and capacities.....	130
Hodge System of Brake Leverage.....	42-45
Hot Pressed Square Nuts, sizes and weights of.....	128
House Closets, complete cost of.....	17
Hoods, coach, cost of repairs.....	3
Inside Finish, coach, cost of.....	12-23
Inside Labor, coach, cost of.....	23-24
Inside Lining, freight, cost of.....	78
Intermediate Sills, cost of repairs.....	71-73
Iron, flat bar, sizes and weights of.....	119
Iron, galvanized, sizes and weights of.....	124
Iron, plate, sizes and weights of.....	121
Iron, round and square, sizes and weights of.....	120
Iron, rules for determining the weight of.....	118
Iron, sheet, gauge and weights of.....	122-123
Iron, specific gravity of.....	123
Janney-Miller Platforms, cost of.....	8-11
Journal Bearings, M. C. B., weight and cost of.....	94
Journals, charge for truing up.....	96
Labor, carpenters, inside of coach.....	24
Labor, carpenters, outside of coach.....	1-2
Labor, painters, inside of coach.....	24
Labor, painters, outside of coach.....	26-32
Labor, trimmers, inside of coach.....	23-25
Labor, tinning roof of coach.....	23, 25
Labor, wheels and axles.....	96-97
Land Measure, table of.....	104
Letter Board, cost of repairs.....	2
Lettering Car, cost per letter.....	2
Leverage, car brake, diagram.....	42
Leverage, car brake, Hodge and Stevens system.....	42-45
Liquid Measure, table of.....	106
Liquids, specific gravity and weights of.....	110
Logs, green, weight per 1,000 feet, board measure.....	112
Long Measure, table of.....	105
Lumber Measure, table of.....	140-147
Lumber, bill of, in standard box car.....	149-150
Lumber, bill of, in standard coach.....	46-47
Lumber, bill of, in standard coach trucks.....	58, 62
Lumber, bill of, in standard coal car sides.....	159
Lumber, bill of, in standard caboose trucks.....	67
Lumber, bill of, in standard caboose platforms.....	70

INDEX—CONTINUED.

	PAGE.
Lumber, bill of, in standard flat car.....	155
Lumber, bill of, in standard freight trucks.....	160-162
Lumber, bill of, in standard Miller platforms.....	5, 47
Lumber, weight of 1,000 feet, board measure.....	112
M. C. B. Axles, weight and cost of.....	93
M. C. B. Couplers, weight and cost of.....	101
M. C. B. Journal Bearings, weight and cost of.....	94
M. C. B. Wheels and Axles, cost of.....	96-97
Material in Body of Coach.....	46-57
Material in Body of Freight Car, average weight and cost of.....	52-87
Material in Body of Freight Car, above sills, cost of.....	77
Material in Doors, coach, cost of.....	12
Material in Doors, freight, cost of.....	90
Material in Roofs, freight, comparative cost of.....	79
Material in Platforms, Miller, bill of.....	6-7
Material in Platforms, Janney-Miller, bill of.....	8-11
Material in Platforms, caboose, bill of.....	70
Material in Trucks, caboose, bill of.....	67-69
Material in Trucks, coach, bill of.....	58-66
Material in Trucks, freight, bill of.....	160-162
Measures of Length, French and British.....	108
Measures of Length, French and United States.....	108
Mensuration of Solids and Surfaces.....	109
Metals, weights per square foot.....	121
Miller Platforms, bill of material and cost.....	5-7
Multipliers for Rapid Approximation.....	109
Nails, Spikes and Tacks, sizes and weights of.....	131
Nautical Measure, table of.....	107
Nuts and Bolt Heads, weight of.....	127
Nuts, hot pressed, square, sizes and weights of.....	128
Painting Coaches, Murphy's A B C system, cost of.....	27
Painting Coaches, lead and rough stuff, cost of.....	28
Painting Coaches, Sherwin & Williams, 10 day, cost of.....	29
Painting Coaches, lead and scraping filler, cost of.....	30
Painting Coaches, painting over old paint, cost of.....	31
Painting Coaches, comparative cost of different systems.....	32
Painting Coaches, cost per square foot.....	1-2
Painting Coaches, labor inside of coach.....	24
Painting Freight Cars.....	78
Passenger Cars, brake equipment, repair prices.....	38-41
Passenger Cars, repairs of.....	1-5
Pintsch Lights, cost of.....	36
Plate Iron, weight per square foot.....	121
Radius, when length of arc and rise are given.....	109
Railway Curves, degree and radius of.....	141
Repairs of Freight Equipment, cost of.....	71-80

INDEX--CONTINUED.

	PAGE.
Repairs of Freight Brake Equipment, cost of.....	89-91
Repairs of Freight Roofs, cost of.....	79
Repairs of Freight Trucks, cost of.....	92-95
Repairs of Passenger Equipment, cost of.....	1-5
Repairs of Passenger Brake Equipment, cost of.....	38-41
Repairs of Passenger Roofs, cost of.....	3
Repairs of Passenger Trucks, cost of.....	37
Repairs of Passenger Platforms, cost of.....	5
Rigid Trucks, bill of material.....	160
Rods and Bolts, box car, weight and cost of.....	81
Roofs, comparative cost of.....	79
Roofing Canvas, cost of.....	2
Roofing Tin, sizes and weights of.....	125
Sash, Blinds and Deck Sash, cost of.....	18-20
Saloon, Gents', cost of.....	18
Saloon, Ladies', cost of.....	13
Scraping and Varnishing Coach Inside, cost of.....	25
Scraping and Varnishing One Set of Sash and Seat Frames.....	24
Seats and Backs, bill of material and cost of.....	21-22
Settlement Prices of Cars Destroyed.....	98-100
Sheet Iron, Steel, Copper and Brass, gauge and weight of.....	122-124
Shrinkage of Castings.....	118
Siding Car Outside, coach, cost of.....	1-2
Siding Car Outside, freight, cost of.....	78
Side Finish, inside coach, cost of.....	13
Side Sills, cost of repairs.....	71-72
Sills, cost of repairs.....	71-75
Sizes and Weights of Hot Pressed Nuts.....	123
Sizes and Weights of Spikes, Nails and Tacks.....	129
Sizes and Weights of Steel Car Truck Channels and Angles.....	124
Sizes and Weights of Steel Car Springs, helical.....	130
Sizes and Weights of Tin and Terne Plates.....	125
Sizes and Weights of Wrought Washers.....	138
Space Occupied by One Ton of 2,240 Pounds.....	111
Specific Gravity of Liquids.....	110
Specific Gravity of Iron, Steel, Copper and Brass.....	123
Spikes, Nails and Tacks, sizes and weights of.....	129
Springs, helical, weights and capacity of.....	130
Square Measure, table of.....	106
Square Nuts, hot pressed, sizes and weights of.....	128
Standard Bolt Heads and Nuts, Franklin Institute.....	127
Standard Box Car, detail bill of material.....	149-154
Standard Brake Forgings, freight, weight and cost of.....	86
Standard Brake Forgings, passenger, weight and cost of.....	38-39
Standard Coal Sides, detail bill of material.....	159
Standard Coach Body, detail bill of material.....	46-57
Standard Coach Trucks, detail bill of material.....	58-66
Standard Coach Platforms, detail bill of material.....	6-10
Standard Caboose Platforms, detail bill of material.....	70

INDEX—CONTINUED.

	PAGE.
Standard Caboose Trucks, detail bill of material.....	67-69
Standard Flat Car, detail bill of material.....	155-159
Standard Freight Trucks, detail bill of material.....	160-162
Standard Number of Threads to an Inch.....	127
Standard M. C. B. Axles, weight and cost of.....	101
Standard M. C. B. Couplers, weight and cost of.....	93
Standard M. C. B. Journal Bearings, weight and cost of.....	94
Steam Heating	34-36
Stevens System of Brake Leverage.....	42-45
Steel, sheet, thickness and weight per square foot.....	121-123
Steel Car Truck, channels, sizes and weight of.....	124
Steel Bolsters, body.....	73-82
Steel Bolsters, truck.....	92
Steel Followers, Graham draft gear.....	82
Stop Wedges, Bissell, wrought iron and steel.....	82
Table of Apothecary's Weight.....	104
Table of Avolrdupois Weight.....	105
Table of Board Measure.....	140-147
Table of Cubic Measure.....	107
Table of Decimals of an Inch.....	138
Table of Depreciation of \$100.....	100
Table of Liquid Measure.....	106
Table of Long Measure.....	105
Table of Measures of Length.....	108
Table of Railway Curves, degrees and radius.....	139
Table of Square Measure.....	106
Table of Standard Number of Threads to an Inch.....	127
Table of Troy Weight.....	104
Table of Weights and Measures.....	104-108
Tacks, weights and sizes of.....	129
Tanks, capacity of.....	110
Temperature of Steam Under Pressure.....	35
Tin and Terne Plates, sizes and weights of.....	125
Tin Material in Coach.....	55
Tinning Roof of Coach, cost of.....	2
Tinning Hood of Coach, cost of.....	3
To Find the Radius, when length of arc and rise given.....	109
Trimnings, in coach, list of.....	52-53
Trimmers, labor in coach.....	23
Troy Weight, table of.....	104
Truck Bolsters, freight, cost of.....	92
Truck Castings, freight, weight and cost of.....	92
Truck Castings, passenger, weight and cost of.....	37
Truck Channels and Angles, weight and sizes of.....	124
Truck Destroyed, settlement prices.....	100
Truck, prices for renewing material, freight.....	92-95
Truck, prices for renewing material, passenger.....	37
Truss Rods, freight, weight and cost of.....	83


INDEX—CONTINUED.

	PAGE.
Upholstery Material in Coach.....	55
Upholstery Seats, cushions and backs, cost of.....	21-23
Various Substances, weight per cubic foot.....	114-117
Varnishing Coach, inside.....	25-26
Varnishing Coach, outside.....	27-31
Varnishing Sash, Blinds, Seats and Head Lining.....	24
Veneers for Head Lining, cost of.....	23
Vestibules, Pullman, cost of applying.....	4
Washers, wrought, sizes and weights of.....	138
Washing and Varnishing Coach, complete cost of.....	25-26
Washing and Painting Coach, outside, cost of.....	31
Washstands, corner, complete, cost of.....	16
Washstands, double, complete, cost of.....	15
Washstands, ladies' saloon, complete, cost of.....	14
Washstands, tanks, complete, cost of.....	14-16
Water Cooler	17
Water, weight of.....	117
Weights and Measures, tables of.....	105-108
Weights and Specific Gravity of Liquids.....	110
Weights and Specific Gravity of Metals.....	123
Weights of Agricultural Products.....	113
Weights of Axles, M. C. B.....	93
Weight of Bar Iron, flat.....	119
Weight of Bar Iron, round and square.....	120
Weight of Bolts, square heads and nuts.....	128
Weight of Bolt Heads and Nuts.....	127
Weight of Bolsters, freight, body.....	82
Weight of Bolsters, freight, trucks.....	92
Weight of Brake Forgings, freight.....	86-87
Weight of Brake Forgings, passenger.....	39
Weight of Brick, per cubic foot.....	114
Weight of Castings by Weight of Pattern.....	118
Weight of Castings in Car Body, freight.....	85, 151-156
Weight of Castings in Car Body, passenger.....	50-51
Weight of Castings on Car Trucks, passenger.....	60-65
Weight of Castings in Car Trucks, freight.....	94-95, 160-162
Weight of Castings in Car Trucks, caboose.....	68
Weight of Channels and Angles, car truck.....	124
Weight of Coal and Coke.....	114
Weight of Couplers, M. C. B.....	101
Weight of Galvanized Iron.....	124
Weight of Logs, green, per 1,000 feet.....	112
Weight of Lumber, per 1,000 feet.....	112
Weight of Masonry, per cubic foot.....	116
Weight of Materials in Car Body, freight.....	81-87, 151-155
Weight of Materials in Car Body, passenger.....	48-57
Weight of Material in Car Trucks, passenger.....	58-61, 63-66
Weight of Material in Trucks, freight.....	92-95, 160-162

INDEX—CONTINUED.

	PAGE.
Weight of Material in Trucks, caboose.....	67-69
Weight of Metals per square foot.....	121
Weight of Nuts, square, hot pressed.....	126
Weight of Plate Iron, per square foot.....	121
Weight of Sand, per cubic foot.....	117
Weight of Sheet Iron, Steel, Copper and Brass.....	121-123
Weight of Spikes, Nails and Tacks.....	129
Weight of Springs, helical.....	130
Weight of Tin and Terne Plates.....	125
Weight of Various Substances, per cubic foot.....	114-117
Weight of Water, per cubic foot.....	117
Weight of Water in Heater Pipes.....	35
Weight of Washers, wrought iron.....	133
Weight of Wrought Iron Pipe.....	35
Weight of Wrought Iron, per cubic foot.....	123
Weight of Wrought Iron, per cubic inch.....	123
Westinghouse, freight, brake equipment.....	38-91
Westinghouse, passenger, brake equipment.....	38-41
Wheels and Axles, M. C. B., prices for renewals.....	96-97



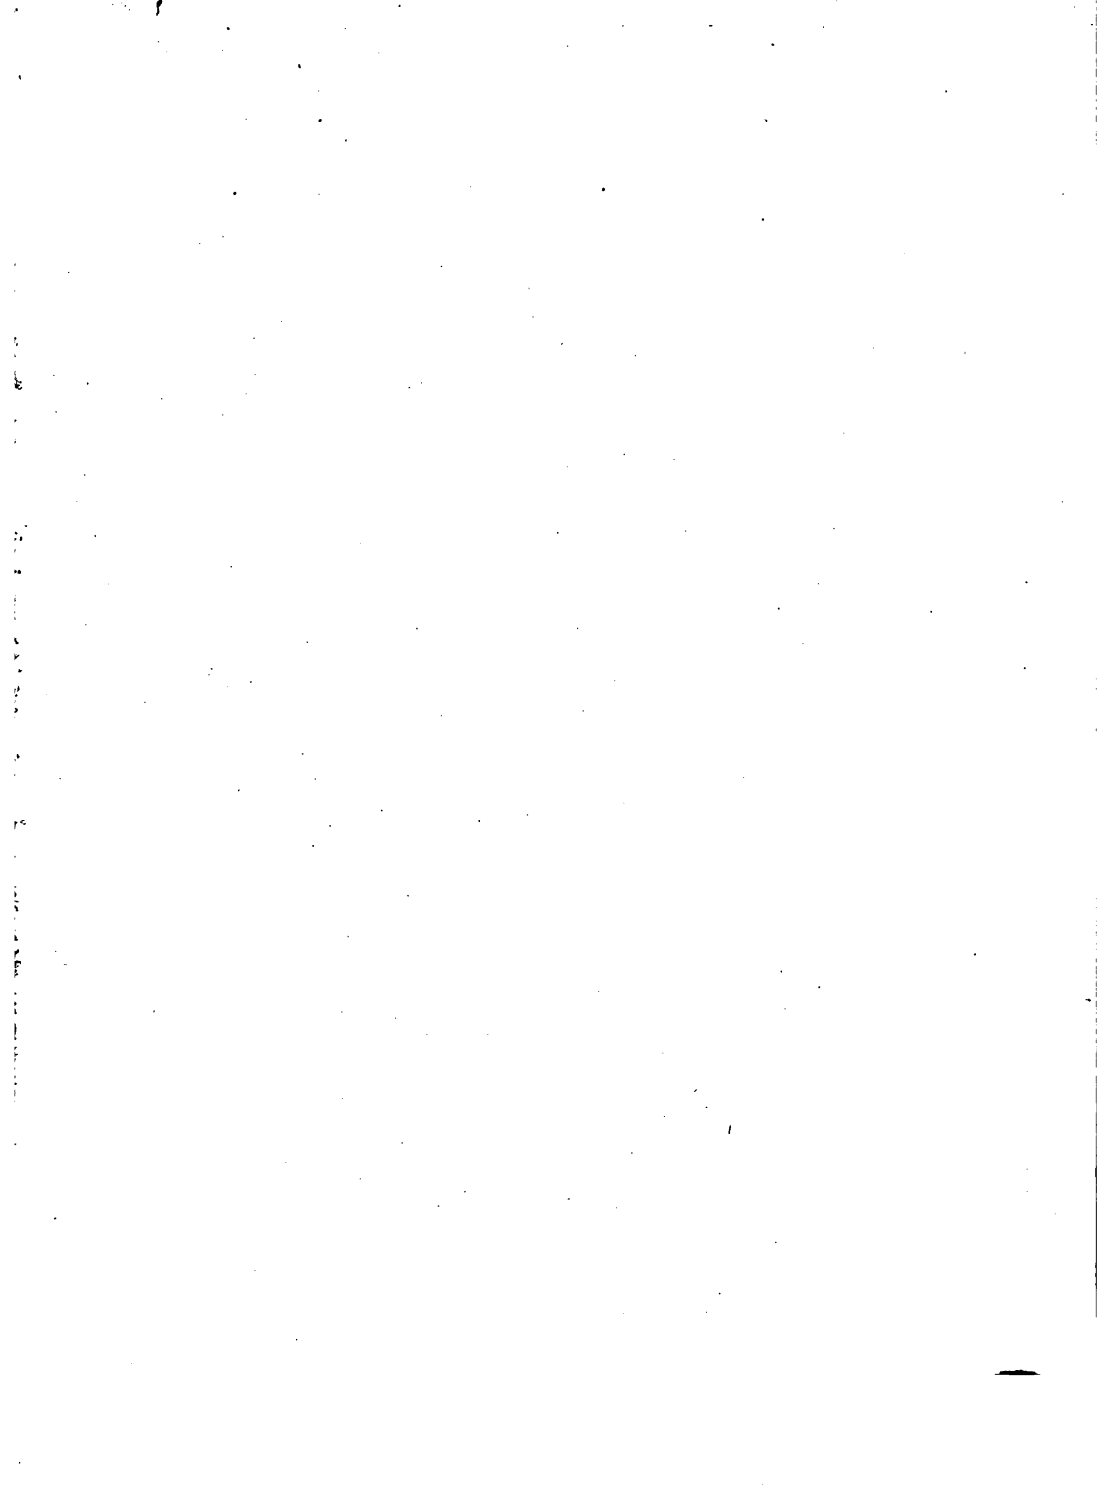

89090510991



b89090510991a